


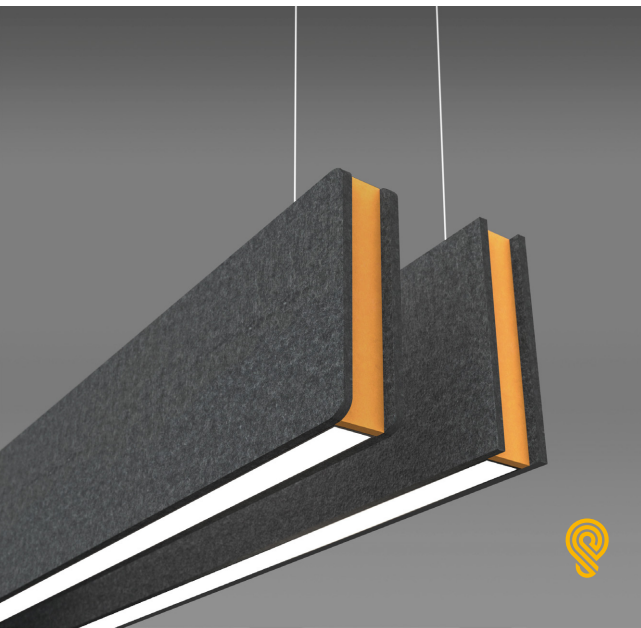

FEATURES:

- ✓ Architectural acoustic luminaire with direct/indirect lighting distribution.
- ✓ Made from recyclable plastic material available in different thicknesses.
- ✓ Class1 fire rated with 0.7 Noise Reduction Coefficient / 1" Acoustic.
- ✓ Light source: LED boards.
- ✓ Diffused illumination is provided by a frosted opal lens.
- ✓ Extruded aluminum body comes with a built-in-driver and available in a black or white finish.
- ✓ LED strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

SPECIFICATION:

Sonic VECTOR+ - - - - - - - - - - - -

Enter the Product Code into the boxes above

TYPE

- ☐ FC - Curved Edge
☐ FS - Square Edge

HEIGHT

- ☐ 12 in
☐ 16 in
☐ 24 in

SIZE

- ☐ 4 ft
☐ 6 ft
☐ 8 ft
☐
 Specify custom size.

SOURCE

- ☐ 5 W/ft
☐ 7 W/ft
☐ 10 W/ft

RADIANCE

- ☐ DD - Direct¹
☐ ID - Indirect²
☐ UD - Uneven³
 1. 100%Down
 2. 100%Up
 3. 70%Down/30%Up

VOLTAGE

- ☐ UNV - 120/277V
☐ 347V¹
 1. Verify availability.

DRIVER

- ☐ ST - On/Off
☐ DL - 0-10V Dim (1%)
☐ DLO - 0-10V Dim (to Off)
☐ DL2 - 0-10V Dim (TW)
☐ CV - Constant Voltage (RGBW)
☐
 Specify dimming protocol.

MOUNTING

- ☐ S6B - 6 ft Cord BK¹
☐ S6W - 6 ft Cord WH¹
☐ S ft²
 1. Canopy match the Cord Color
 2. Specify Suspension Length/color.

LENS

- ☐ OP - Opal

ED VECTOR+ FINISH

- ☐ BK - Black¹
☐ WH - White²
 1. RAL 9005
 2. RAL 9016

CCT

- ☐ 30K - 3000 Kelvin/90CRI
☐ 35K - 3500 Kelvin/90CRI
☐ 40K - 4000 Kelvin/90CRI
☐ RGBW¹
☐ TW - Tunable White (27K-65K)²
☐
 1. Available with CV.
 2. Available with DL2.
 Specify required CCT.

ACOUSTIC FINISH

Specify additional color for Two-Tone, for example 04/11.



LUMEN OUTPUT W/ft:

Watts	30K	35K	40K
5 W	515 lm	525 lm	535 lm
7 W	720 lm	735 lm	750 lm
10 W	1030 lm	1050 lm	1080 lm




Declare

Project:

Type:




SIZE:

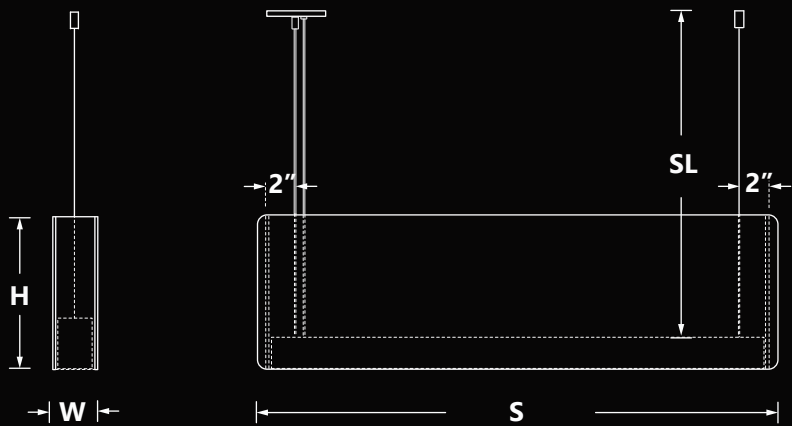


W-Width	3.00 in
H-Height	S-Size
12 in = 11.75 in	4 ft = 47.75 in
16 in = 15.75 in	6 ft = 71.75 in
24 in = 23.75 in	8 ft = 95.75 in

SL : Suspension Length


RADIANCE:

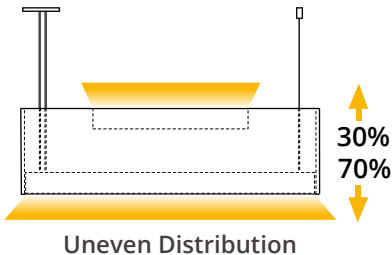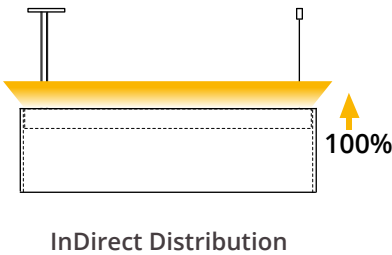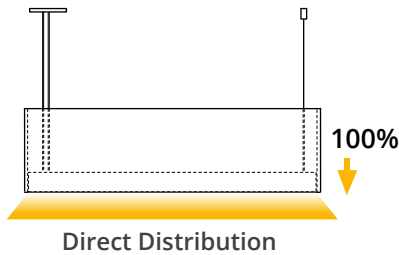


TYPE:




FC - Curved Edge




End Cap Detail




FC - 04/11




FC - 05




FS - Square Edge



End Cap Detail



FS - 04/11



FS - 05