

FEATURES:

- ✓ Architectural luminaire with direct distribution.
- ✓ Light source: LED Tape.
- ✓ Diffused illumination is provided by high efficiency frosted opal lens.
- ✓ Sleek body of luminaire is made from curved aluminum profile.
- ✓ Extruded aluminum body comes with a black or white finish.
- ✓ Remote driver enclosure can be surface mounted or installed in a ceiling cavity. Standard enclosure size: 1.60"H x 3.75"W x 18.5"L.
- ✓ LED tape is rated for 60,000 hrs. L80 with 90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

SPECIFICATION:

ED ORBIT+ — — — — — — — — — — —

Enter the Product Code into the boxes above.

TYPE

- ☐ S - Shape

SIZE

- ☐ 3 Ft
☐ 4 Ft
☐ 6 Ft
☐ 8 Ft

SOURCE

- ☐ 5 W/Ft
☐ 7 W/Ft
☐ 10 W/Ft

RADIANCE

- ☐ DD - Direct ¹
☐ SD - Side Distribution ²
1. 100% Downward
2. 100% Sideways

VOLTAGE

- ☐ UNV - 120/277V
☐ 347V ¹
1. Verify availability.

DRIVER

- ☐ ST - On/Off
☐ DL - 0-10V Dim (1%)
☐ DLO - 0-10V Dim (to Off)
☐ DL2 - 0-10V Dim (TW)
☐ DLA - 0-10V Dim (Aux)
☐ DA4 - DALI D4i
☐ CV - Constant Voltage (RGBW)
☐
Specify dimming protocol.

MOUNTING

- ☐ S6B - 6 ft Cord BK ¹
☐ S6W - 6 ft Cord WH ¹
☐ S ft ²
1. Canopy will match the Cord color.
2. Specify Suspension length and color.

LENS

- ☐ OP - Opal

FINISH

- ☐ BK - Black ¹
☐ WH - White ²
☐ CF/RAL
1. RAL 9005
2. RAL 9016
Specify required RAL number.

CCT

- ☐ 30K - 3000 Kelvin/90CRI
☐ 35K - 3500 Kelvin/90CRI
☐ 40K - 4000 Kelvin/90CRI
☐ RGBW ¹
☐ TW - Tunable White (27K-65K) ²
☐
1. Available with DMX or CB.
2. Available with DL2, DA4 or CB.
Specify required CCT.

OPTIONS

- ☐ No Options ¹
☐ EC - Emergency Circuit
☐ CB - Casambi Bluetooth(TW, RGBW)
☐ DMX - DMX (RGBW)
☐ AWN - Athena Wireless Node (DLA)
1. Leave empty.

LUMEN OUTPUT W/ft:


Watts	30K	35K	40K
5 W	440 lm	450 lm	460 lm
7 W	618 lm	630 lm	642 lm
10 W	882 lm	900 lm	918 lm



Project:



Type:

PROFILE:




DIMENSIONS:


Profile	Size	Length	Height - H1	Radius - R
Width - W	3 ft	37.03 in	7.87 in	15 in
2.36 in	4 ft	46.75 in	6.00 in	30 in
Height - H	6 ft	73.00 in	7.87 in	15 in
1.45 in	8 ft	92.75 in	6.00 in	30 in

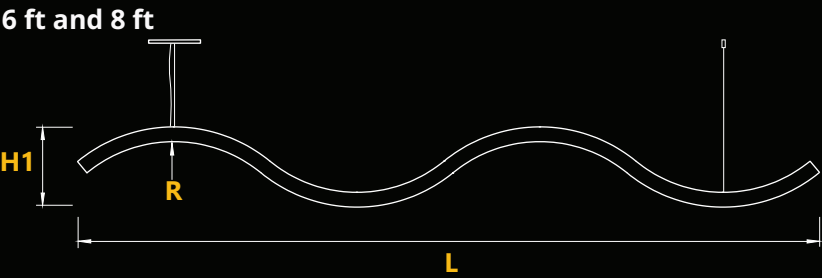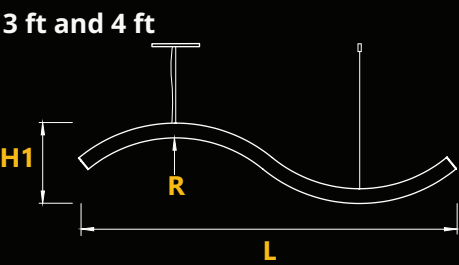


SIZES AND CONFIGURATIONS:




3 ft




4 ft




6 ft




8 ft

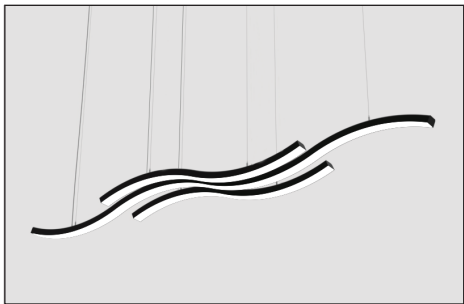

4 ft and 8 ft - Combination

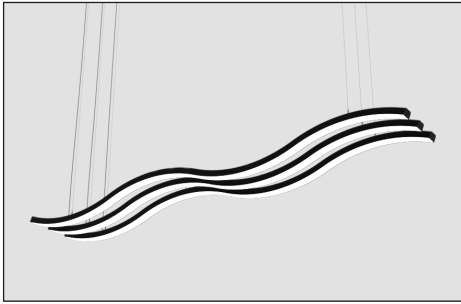

8 ft - Combination

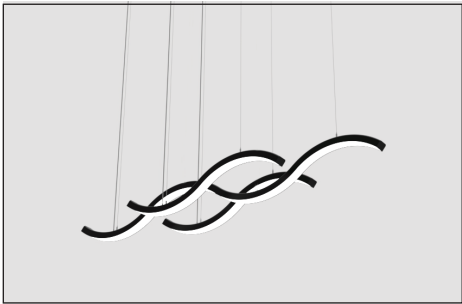

3 ft and 6 ft - Combination