


**FEATURES:**

- ✓ Architectural sound absorbing Eco Felt Acoustic panel.
- ✓ Made from recyclable plastic material available in different thicknesses.
- ✓ Class 1 fire rated with a 0.7 Noise Reduction Coefficient/1" Acoustic.
- ✓ Light source: COB LED.
- ✓ High efficiency integral reflector combined with an opal lens insert provides excellent lighting distribution.
- ✓ Square internal reflector is available in a wide range of finishes.
- ✓ Aluminum body of the luminaire comes with a built-in-driver.
- ✓ LED spot is rated for 60,000 hrs. L70 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

**reinventlight**
**SPECIFICATION:**
**Sonic CUBIC+**  -  -  -  -  -  -  -  -  -  - 

Enter the Product Code into the boxes above

**TYPE**
 BS - Box

**HEIGHT**
 12 in  
 16 in  
 24 in

**SOURCE**
 15 W  
 20 W  
 25 W

**RADIANCE**
 DD - Direct

**VOLTAGE**
 UNV - 120/277V

**DRIVER**
 ST - On/Off  
 DL - 0-10V Dim (1%)  
 DA4 - DALI D4i  
  

Specify dimming protocol.

**MOUNTING**
 S6B - 6 ft Cord BK<sup>1</sup>  
 S6W - 6 ft Cord WH<sup>1</sup>  
 S   ft<sup>2</sup>

 1. Canopy match the Cord Color  
 2. Specify Suspension Length/color.

**REFLECTOR**
 BK - Black  
 WH - White

**ED CUBIC+ FINISH**
 BK - Black<sup>1</sup>  
 WH - White<sup>2</sup>  
 1. RAL 9005  
 2. RAL 9003

**CCT**
 30K - 3000 Kelvin/90CRI  
 35K - 3500 Kelvin/90CRI  
 40K - 4000 Kelvin/90CRI  
  

Specify required CCT.

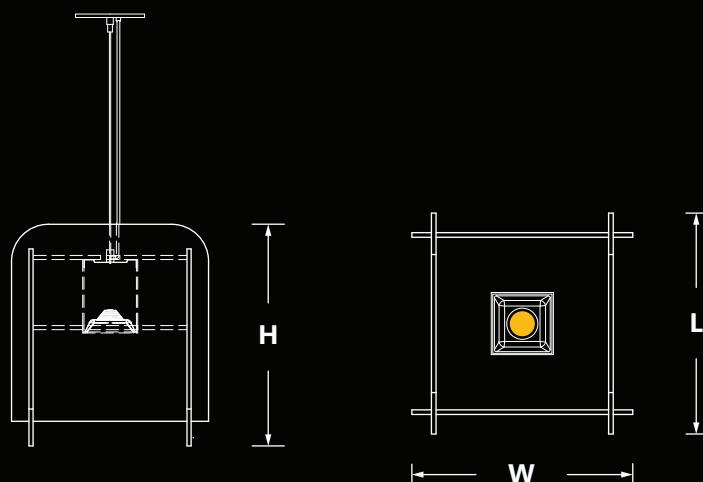
**ACOUSTIC FINISH**

Please specify finishes.


**LUMEN OUTPUT:**

Watts	30K	35K	40K
15 W	1400 lm	1430 lm	1460 lm
20 W	1910 lm	1950 lm	1990 lm
25 W	2350 lm	2400 lm	2450 lm


**Project:**
**Type:**

**SIZE:**


H - Height	L - Length	W - Width
12.00 in = 11.75 in	12.00 in	12.00 in
16.00 in = 15.75 in	16.00 in	16.00 in
24.00 in = 23.75 in	24.00 in	24.00 in

**FINISHES:**


#11/18



#03/01



#31/07



#25/18



#25/24



#12/09



#11/01



#24/09