

## FEATURES:

- ✓ Architectural luminaire with direct distribution.
- ✓ Light source: LED board or LED strip.
- ✓ Even illumination is provided by a variety of high-efficiency opal lens.
- ✓ Suitable for surface, suspended and recessed installations.
- ✓ Extruded aluminum body comes with a standard black or white finish.
- ✓ Also available with custom color options.
- ✓ LED strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

## SPECIFICATION:

**ED TRIANGLE+**  —  —  —  —  —  —  —  —  —  —

Enter the Product Code into the boxes above.

\_\_\_\_\_ ft  
2-8 ft Arm length.

### SOURCE

- ☐ 5 W/ft
- ☐ 7 W/ft
- ☐ 10 W/ft

### RADIANCE

- ☐ DD - Direct

### VOLTAGE

- ☐ UNV - 120/277V
  - ☐ 347V <sup>1</sup>
1. Verify availability.

### DRIVER

- ☐ ST - On/Off
  - ☐ DL - 0-10V Dim (1%)
  - ☐ DLO - 0-10V Dim (to Off)
  - ☐ DL2 - 0-10V Dim (TW)
  - ☐ DLA - 0-10V Dim (Aux)
  - ☐ DA4 - DALI D4i
  - ☐ CV - Constant Voltage (RGBW)
  - ☐
- Specify dimming protocol.

### MOUNTING

- ☐ S6B - 6ft Cord BK <sup>1</sup>
  - ☐ S6W - 6ft Cord WH <sup>1</sup>
  - ☐ S  ft <sup>2</sup>
  - ☐ SF - Surface Mount
  - ☐ RT - Recessed Trimless
1. Canopy match the Cord color.  
2. Specify Suspension length/color.

### LENS

- ☐ OP - Opal

### FINISH

- ☐ BK - Black<sup>1</sup>
  - ☐ WH - White<sup>2</sup>
  - ☐ CF/RAL
1. RAL 9005  
2. RAL 9016  
Specify required RAL number.

### CCT

- ☐ 30K - 3000 Kelvin/90CRI
  - ☐ 35K - 3500 Kelvin/90CRI
  - ☐ 40K - 4000 Kelvin/90CRI
  - ☐ RGBW <sup>1</sup>
  - ☐ TW - Tunable White (27K-65K)<sup>2</sup>
  - ☐
1. Available with DMX or CB.  
2. Available with DL2, DA4 or CB.  
Specify required CCT.

### OPTIONS

- ☐ No Options<sup>1</sup>
  - ☐ EC - Emergency Circuit
  - ☐ CB - Casambi Bluetooth(TW, RGBW)
  - ☐ DMX - DMX (RGBW)
  - ☐ JD - JDRF Autonomy Sensor (DA4)
  - ☐ DOS - Daylight & Occupancy Sensor (DLA)
  - ☐ AWN - Athena Wireless Node (DLA)
1. Leave empty.

## LUMEN OUTPUT W/ft:



Watts	30K	35K	40K
5 W	515 lm	525 lm	535 lm
7 W	720 lm	735 lm	750 lm
10 W	1030 lm	1050 lm	1080 lm




Project:

Type:


SIZE:

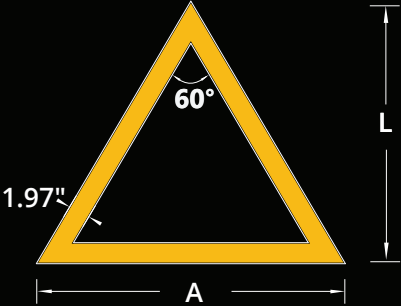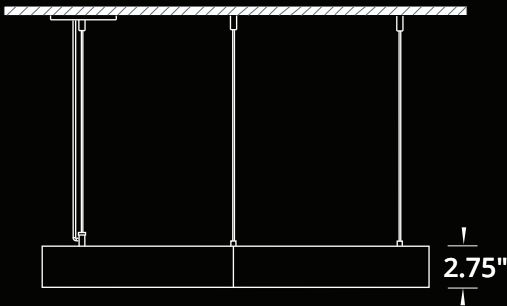

RADIANCE:




MOUNTING:

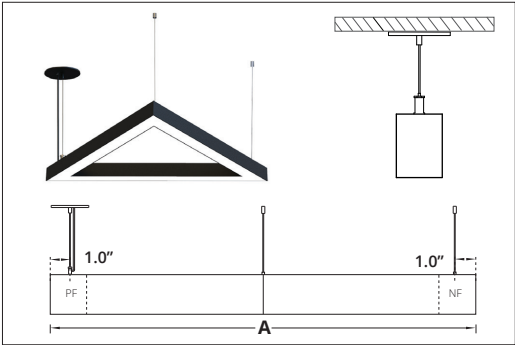

SUSPENDED

PF - Power Feed

NF - Non Power Feed

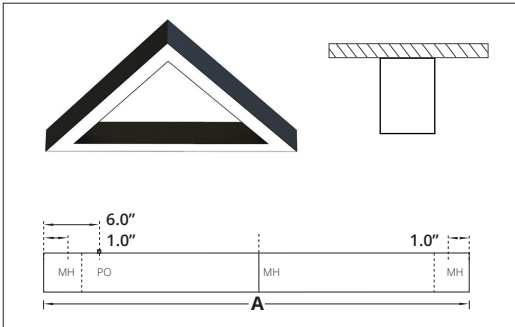

SURFACE MOUNT

PO - Power Opening


MH - Mounting Hole

Size	A	L x A <sup>1</sup>
2 ft	27.59 in	24.13 x 27.60
3 ft	38.86 in	33.65 x 38.86
4 ft	51.61 in	44.70 x 51.61
5 ft	62.61 in	54.22 x 62.61
6 ft	75.36 in	65.26 x 75.36
7 ft	86.36 in	74.80 x 86.36
8 ft	99.11 in	85.83 x 99.11

A - Arm Length

L - Total Length

1. All dimensions are in Inches.

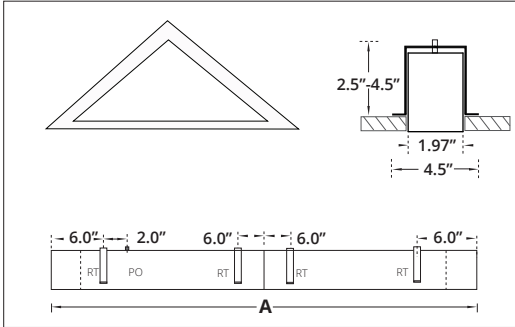

RECESSED TRIMLESS

PO - Power Opening

RT - Recessed Trimless Bracket

Cutout Dimensions = Total Length x Width of Extrusion.