



FEATURES:

- ✓ Architectural floor luminaire with direct/indirect distribution.
- ✓ Light source: 11" LED board (direct) and 22" LED board (indirect).
- ✓ Direct lighting is distributed by Dark Optic with precise, low glare illumination.
- ✓ 7 cell LEDiL reflector is available in several standard finishes.
- ✓ Offered with regular 50°/16UGR and flood 80°/19UGR internal optic.
- ✓ Controlled by on/off switch or optional Casambi Bluetooth dimming module.
- ✓ Extruded aluminum body comes in black or white color.
- ✓ Comes with standard 8 foot plug-in cord.
- ✓ LEDs are rated for 60,000hrs. L80 with +90CRI.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

SPECIFICATION:

ED VECTOR+ — — — — — — — — —

Enter the Product Code into the boxes above.

TYPE

- ☐ FL - Floor Lamp

SOURCE

- ☐ 20 W
☐ 30 W

RADIANCE

- ☐ DI - Direct/Indirect

VOLTAGE

- ☐ UNV - 120/277V

DRIVER

- ☐ ST - On/Off
☐ DL - 0-10V Dim (1%)
☐ DLO - 0-10V Dim (to Off)
☐ DA4 - DALI D4i
☐
 Specify dimming protocol.

REFLECTOR

- ☐ SB - Black
☐ SW - White
☐ SL - Silver



BLACK



WHITE



SILVER

BEAM

- ☐ BF - Flood 50°
☐ BW - Wide 80°

FINISH

- ☐ BK - Black¹
☐ WH - White²
 1. RAL 9005
 2. RAL 9016

CCT

- ☐ 30K - 3000 Kelvin/90CRI
☐ 35K - 3500 Kelvin/90CRI
☐ 40K - 4000 Kelvin/90CRI
☐
 Specify required CCT.

OPTIONS

- ☐ No Options¹
☐ DC - Dual Circuit²
☐ CB - Casambi Bluetooth(DL)
☐ JD - JDRF Autonomy Sensor (DA4)
☐ AWN - Athena Wireless Node (DLA)
 1. Leave empty.
 2. Control Downlight/Uplight separately.




DIMENSIONS:

Length	Width
27.75 in	2.00 in
Height	Height 1
79.00 in	2.75 in
Base Plate	12.00 in x 22.88 in

LUMEN OUTPUT:

Watts	30K	35K	40K
20 W	2295 lm	2340 lm	2385 lm
30 W	3340 lm	3510 lm	3580 lm

BEAM:

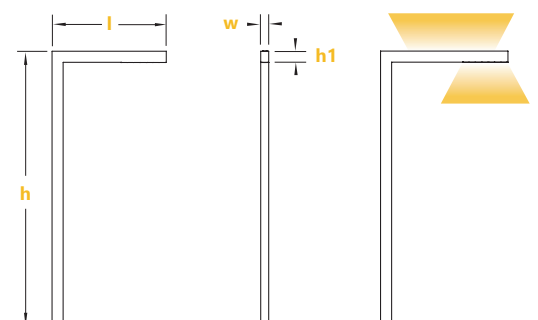

Project:

Type: