



## FEATURES:

- ✓ Architectural luminaire with direct or direct-indirect distribution.
- ✓ Light source: LED 5.5" board.
- ✓ Diffused illumination is provided by high efficiency frosted opal lens.
- ✓ Sleek body of the luminaire combines two aluminum sides with laser-cut metal top enclosure.
- ✓ Suitable for suspended and surface mounted installations.
- ✓ Extruded aluminum body comes with a black or white finish.
- ✓ Also available with custom color options.
- ✓ LED Strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

## SPECIFICATION:

**ED RING+**


Enter the Product Code into the boxes above.

**SIZE**

- 2 ft
- 3 ft
- 4 ft
- Specify custom size.

**SOURCE**

- 25 W
- 50 W
- 75 W<sup>1</sup>

 1. Available for 4ft & Custom sizes.  
 2. Other Wattages are available.

**RADIANCE**

- DD - Direct
- UD - Uneven

**VOLTAGE**

- UNV - 120/277V
- 347V<sup>1</sup>

1. Verify availability.

**DRIVER**

- ST - On/Off
- DL - 0-10V Dim (1%)
- DLO - 0-10V Dim (to Off)
- DL2 - 0-10V Dim (TW)
- DLA - 0-10V Dim (Aux)
- DA4 - DALI D4i
- CV - Constant Voltage (RGBW)
- Specify dimming protocol.

**MOUNTING**

- S6W - 6 ft Cord BK<sup>1</sup>
- S6B - 6 ft Cord WH<sup>1</sup>
- S   ft<sup>2</sup>
- C6B - 6 ft Canopy BK<sup>1</sup>
- C6W - 6 ft Canopy WH<sup>1</sup>
- C   ft<sup>2</sup>
- SF - Surface Mount

 1. Canopy match the Cord color.  
 2. Specify Suspension length/color.  
 3. C - Ceiling Canopy only available for 2-3-4 ft sizes.

**LENS**

- OP - Opal

**FINISH**

- BK - Black<sup>1</sup>
- WH - White<sup>2</sup>
- CF/RAL

 1. RAL 9005  
 2. RAL 9003  
 Specify required RAL number.

**CCT**

- 30K - 3000 Kelvin/90CRI
- 35K - 3500 Kelvin/90CRI
- 40K - 4000 Kelvin/90CRI
- RGBW<sup>1</sup>
- TW - Tunable White (27K-65K)<sup>2</sup>
- 

 1. Available with DMX or CB.  
 2. Available with DL2, DA4 or CB.  
 Specify required CCT.

**OPTIONS**

- No Options<sup>1</sup>
- DC - Dual Circuit<sup>2</sup>
- EC - Emergency Circuit
- CB - Casambi Bluetooth(TW, RGBW)
- DMX - DMX (RGBW)
- AWN - Athena Wireless Node (DLA)

 1. Leave empty.  
 2. Control Downlight/Uplight separately.

## LUMEN OUTPUT:

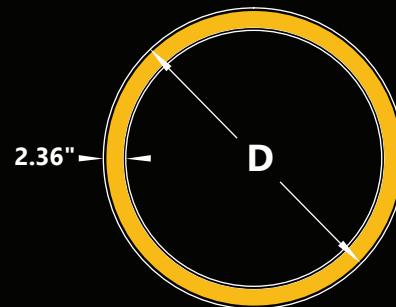
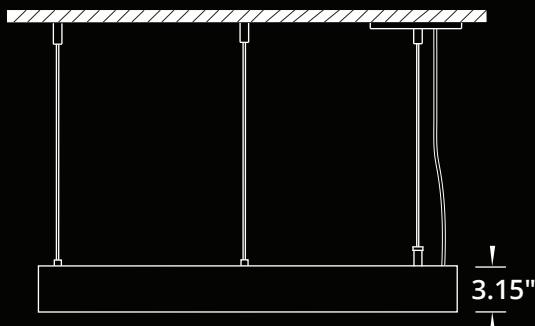

| Watts | 30K     | 35K     | 40K     |
|-------|---------|---------|---------|
| 25 W  | 2205 lm | 2250 lm | 2295 lm |
| 50 W  | 4410 lm | 4500 lm | 4590 lm |
| 75 W  | 6610 lm | 6750 lm | 6890 lm |




Declare.

Project:

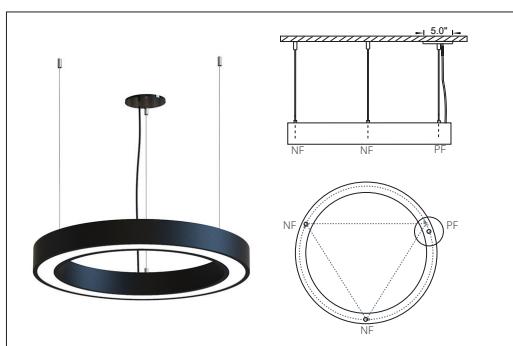
Type:

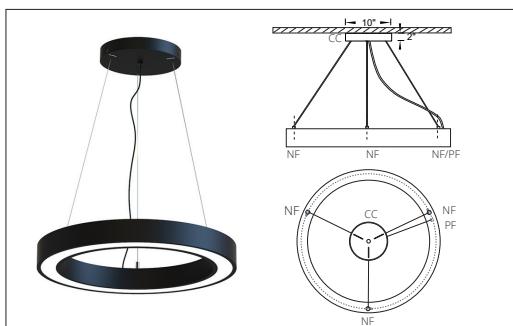
**SIZE:**

**RADIANCE:**


Direct



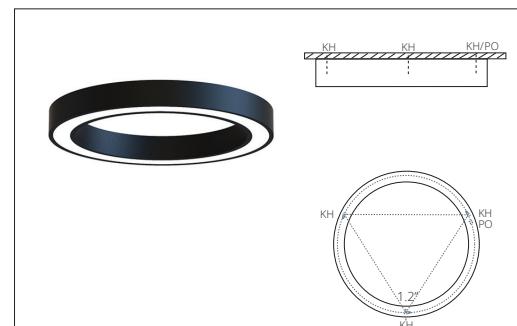
Uneven

**MOUNTING:**

**SUSPENDED - STRAIGHT WIRE**

 PF - Power Feed  
 NF - Non Power Feed

**SUSPENDED - CEILING CANOPY**

 CC - Ceiling Canopy - Available for 2-3-4 ft sizes  
 PF - Power Feed  
 NF - Non Power Feed

| Size | Diameter |
|------|----------|
| 2 ft | 25.98 in |
| 3 ft | 35.43 in |
| 4 ft | 47.24 in |


**SURFACE MOUNT**

 PO - Power Opening  
 KH - Key Hole