



## FEATURES:

- ✓ Architectural luminaire with direct-indirect distribution.
- ✓ Light source: LED Tape.
- ✓ Diffused illumination is provided by high efficiency frosted opal lens.
- ✓ Sleek body of the luminaire is made from curved aluminum profile.
- ✓ Suitable for suspended and surface mounted installations.
- ✓ Extruded aluminum body comes with black or white finish.
- ✓ Remote driver is mounted in round ceiling canopy or optional rectangle enclosure.
- ✓ LED tape is rated for 50,000hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards. **reinventlight**

## SPECIFICATION:

**ED ORBIT+**

SIZE	SOURCE	RADIANCE	VOLTAGE	DRIVER	MOUNTING	LENS	FINISH	CCT	OPTIONS
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Enter the Product Code into the boxes above.

### SIZE

- ☐ 2 Feet  
☐ 3 Feet  
☐ 4 Feet  
☐  \*

\* Please specify required size.

### SOURCE

- ☐ 25WLED  
☐ 50WLED  
☐ 75WLED\*

\*Available for 4 Feet.  
 \*\*Other Wattages are available.

### RADIANCE

- ☐ IL - Inner Lit (100% Inward)  
☐ OL - Outer Lit (100% Outward)

\*Light Distribution.

### VOLTAGE

- ☐ 120V  
☐ 277V  
☐ 347V\*

\*Not available for all configurations.

### DRIVER

- ☐ ST - Standard (Non-Dimming)  
☐ DL - 0-10V Dimming (1%)  
☐ DA - DALI  
☐ WZ - Wiz\*\*  
☐  \*

\* Please specify dimming method (ELV).  
 \*\*Remote driver only.

### MOUNTING

- ☐ C4-Canopy 4Feet\*  
☐ C6-Canopy 6Feet\*  
☐ C  Feet\*\*  
☐ D4-Drop 4Feet  
☐ D6-Drop 6Feet  
☐ D  Feet\*\*  
☐ S4-Suspension 4Feet  
☐ S6-Suspension 6Feet  
☐ S  Feet\*\*  
☐ SF - Surface Mount

\*Canopy installation is not available for custom sizes.

\*\*Please specify required length.

\*\*\*Remote Driver only.

### LENS

- ☐ OP - Opal

### FINISH

- ☐ BK - Black  
☐ WH - White  
☐ CF - Custom  RAL#

### CCT

- ☐ 30K/90CRI - 3000Kelvin  
☐ 35K/90CRI - 3500Kelvin  
☐ 40K/90CRI - 4000Kelvin  
☐ RGBW

\*Other options are available.

## LUMEN OUTPUT:



Watts	30K	35K	40K
25W	2205 lm	2250 lm	2295 lm
50W	4410 lm	4500 lm	4590 lm
75W	6610 lm	6750 lm	6890 lm



Project:



Type:

SIZE:

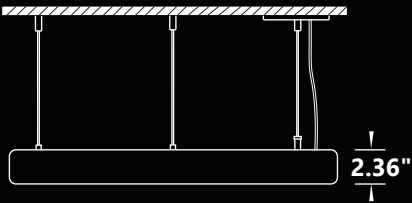

Diameter		
Size	Outer Lit	Inner Lit
2 Feet	27.952 Inch	25.196 Inch
3 Feet	34.250 Inch	37.795 Inch
4 Feet	46.456 Inch	44.094 Inch

RADIANCE:

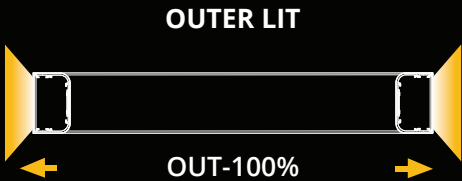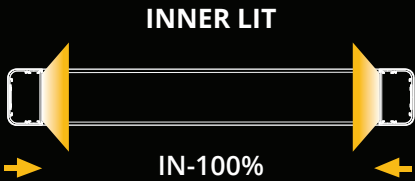

MOUNTING:



SUSPENDED - CEILING CANOPY




SUSPENDED - STRAIGHT WIRE\*

\*Remote Driver.



DROP SUSPENSION\*

\*Remote Driver.

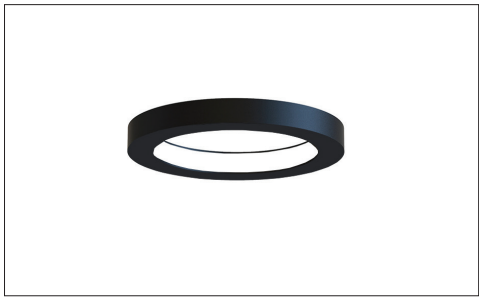

SURFACE MOUNT\*

\*Remote Driver.