
FEATURES:

- ✓ Architectural curved system with direct or direct/indirect distribution.
- ✓ Light source: LED boards.
- ✓ Diffused illumination is provided by a high efficiency frosted opal lens or by an optional prismatic optic.
- ✓ Sleek body of the luminaire is made from an aluminum profile curved to desire shape.
- ✓ Suitable for suspended or surface mounted installations.
- ✓ Extruded aluminum body comes with a black or white finish.
- ✓ Available with custom color options or unique shape configurations.
- ✓ LED strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight
SPECIFICATION:
ED CURVES+ - - - - - - - - - - -

Enter the Product Code into the boxes above.

SHAPE

- CR - Curve
- RG - Ring
- OV - Oval
- SQ - Square
- RC - Rectangle
- CS - Custom Shape

Specify Custom Shape.

SIZE

- _____ Linear ft

Provide drawing (pdf or dwg).

SOURCE

- 5W/ft
- 7W/ft
- 10W/ft

RADIANCE

- DD - Direct
- UD - Uneven¹

1. Suspended Configuration only.

VOLTAGE

- UNV - 120/277V
- 347V¹

1. Verify availability.

DRIVER

- ST - On/Off
- DL - 0-10V Dim (1%)
- DLO - 0-10V Dim (to Off)
- DL2 - 0-10V Dim (TW)
- DLA - 0-10V Dim (Aux)
- DA4 - DALI D4i
- CV - Constant Voltage (RGBW)
- _____

Specify dimming protocol.

MOUNTING

- S4-Suspension 4 ft
- S6-Suspension 6 ft
- S _____ ft
- SF - Surface Mount

Specify required Length.

LENS

- OP - Opal

FINISH

- BK - Black¹
- WH - White²
- CF/RAL

1. RAL 9005

2. RAL 9003

Specify required RAL number.

CCT

- 30K - 3000 Kelvin/90CRI
- 35K - 3500 Kelvin/90CRI
- 40K - 4000 Kelvin/90CRI
- RGBW¹
- TW - Tunable White (27K-65K)²
- _____

1. Available with DMX or CB.

2. Available with DL2, DA4 or CB.

Specify required CCT.

OPTIONS

- No Options¹
- DC - Dual Circuit²
- EC - Emergency Circuit
- CB - Casambi Bluetooth(TW, RGBW)
- DMX - DMX (RGBW)
- JD - JDRF Autonomy Sensor (DA4)
- DOS - Daylight & Occupancy Sensor (DLA)
- AWN - Athena Wireless Node (DLA)

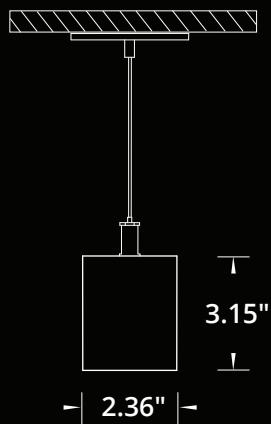
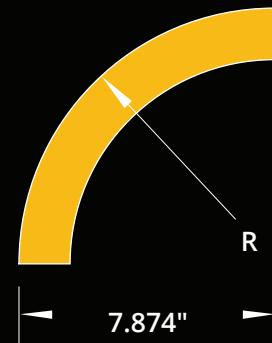
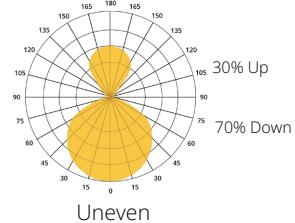
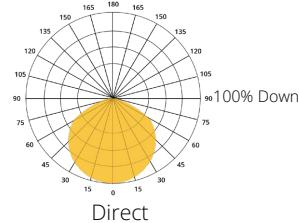
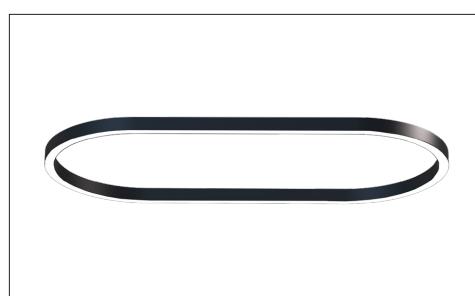
1. Leave empty.

2. Control Downlight/Uplight separately.

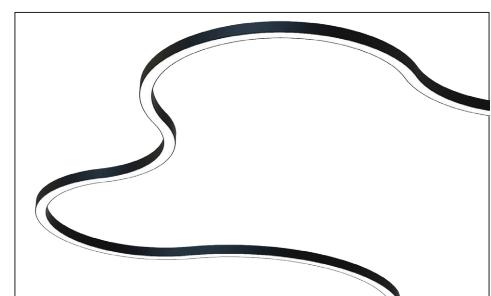
LUMEN OUTPUT W/ft:

Watts	30K	35K	40K
5 W	515 lm	525 lm	535 lm
7 W	720 lm	735 lm	750 lm
10 W	1030 lm	1050 lm	1080 lm


Declare.
Project:
Type:

SIZE:

MINIMUM RADIUS:

RADIANCE:

SHAPES:


CURVE



RECTANGLE

CUSTOM SHAPE

CUSTOM SHAPE