


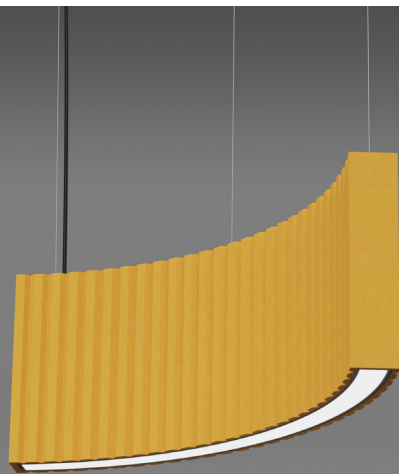

FEATURES:

- ✓ Architectural sound absorbing Eco Felt Acoustic panel.
- ✓ Made from recyclable plastic material available in different thicknesses.
- ✓ Class1 fire rated with 0.7 Noise Reduction Coefficient/1" Acoustic.
- ✓ Light source: LED boards.
- ✓ Diffused illumination is provided by a high efficiency frosted opal lens.
- ✓ Extruded aluminum body comes with a built-in-driver and available in a black or white finish.
- ✓ LED strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

SPECIFICATION:

Sonic CURVE+ - - - - - - - - - - - - -

Enter the Product Code into the boxes above.

TYPE

- ☐ FR - Flush Regular
- ☐ FV - Flush Vcut

HEIGHT

- ☐ 12 in
- ☐ 16 in
- ☐ 24 in

SIZE

- ☐ 3 ft

SOURCE

- ☐ 20 W
- ☐ 30 W
- ☐ 40 W

RADIANCE

- ☐ DD - Direct

VOLTAGE

- ☐ UNV - 120/277V
 - ☐ 347V ¹
1. Verify availability.

DRIVER

- ☐ ST - On/Off
- ☐ DL - 0-10V Dim (1%)
- ☐ DLO - 0-10V Dim (to Off)
- ☐ DL2 - 0-10V Dim (TW)
- ☐ CV - Constant Voltage (RGBW)
- ☐

Specify dimming protocol.

MOUNTING

- ☐ S6W - 6 ft Cord BK ¹
 - ☐ S6B - 6 ft Cord WH ¹
 - ☐ S ft ²
1. Canopy match the Cord color.
2. Specify Suspension length/color.

LENS

- ☐ OP - Opal

ED CURVE FINISH

- ☐ BK - Black¹
 - ☐ WH - White²
1. RAL 9005
2. RAL 9016

CCT

- ☐ 30K - 3000 Kelvin/90CRI
- ☐ 35K - 3500 Kelvin/90CRI
- ☐ 40K - 4000 Kelvin/90CRI
- ☐ RGBW ¹
- ☐ TW - Tunable White (27K-65K) ²
- ☐

1. Available with CV.
2. Available with DL2.
Specify required CCT.

ACOUSTIC FINISH

Specify additional color for Two-Tone, for example 04/11.



LUMEN OUTPUT:


Watts	30K	35K	40K
20 W	2070 lm	2125 lm	2180 lm
30 W	3065 lm	3150 lm	3235 lm
40 W	4086 lm	4200 lm	4313 lm



Project:


Type:

SIZE:

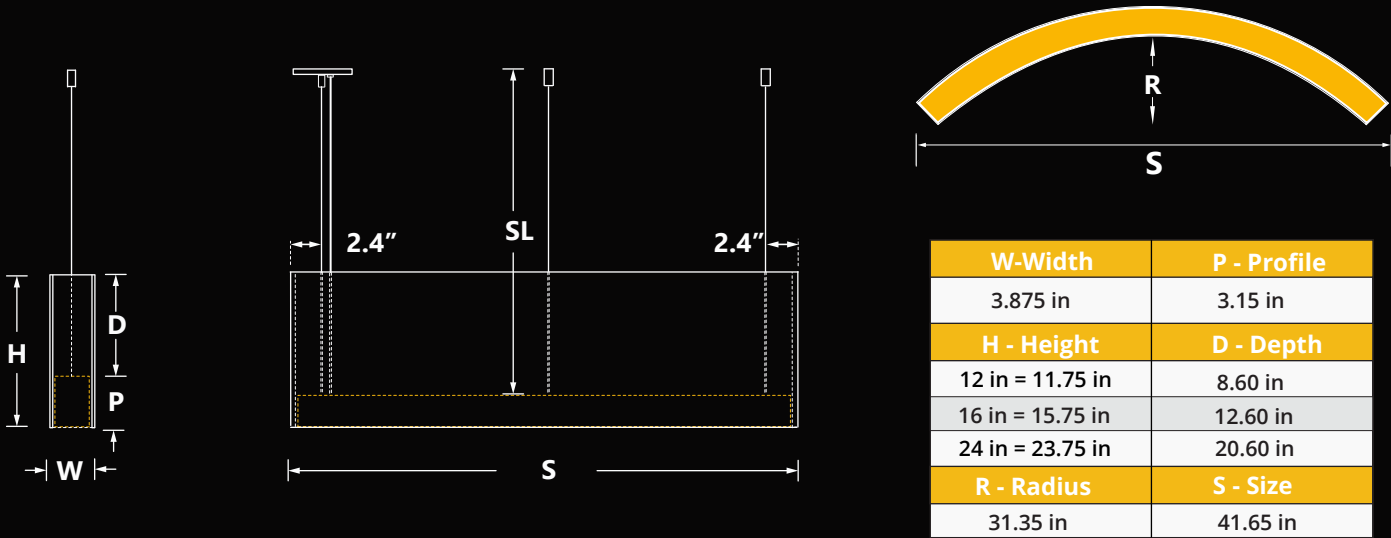


SL - Suspension Length

TYPE:

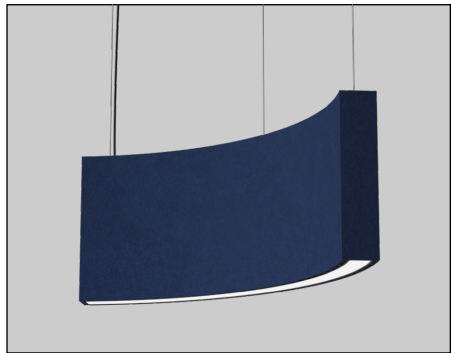


FR - Regular - 01

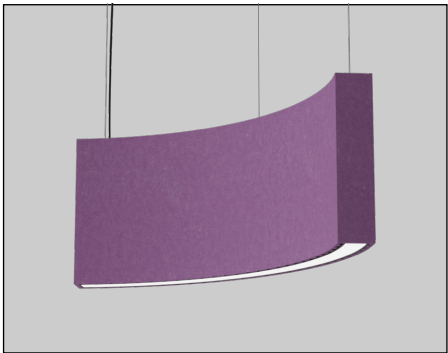


FR - 26



FR - 04/11

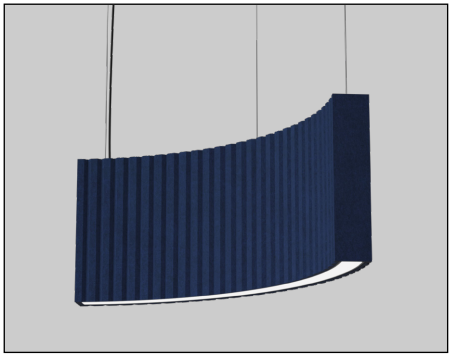

FV - V-Cut - 01

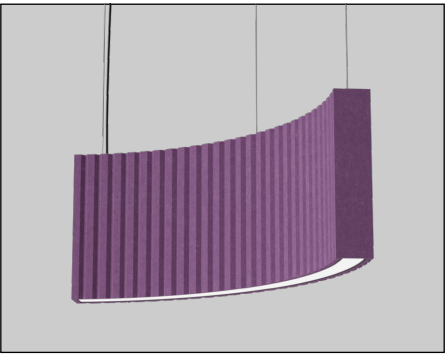

FV - 26



FV - 04/11