

FEATURES:

- ✓ Architectural Y-shaped luminaire with direct distribution.
- ✓ Light source: 11" LED modular board.
- ✓ Dark Optic provides superior lighting distribution with precise low glare illumination.
- ✓ Offered with Flood 50°/10UGR or Wide Flood 80°/15UGR internal optic.
- ✓ Suitable for surface, suspended and recessed installations.
- ✓ Extruded aluminum body comes with a black or white finish.
- ✓ Also available with custom color options.
- ✓ LEDs are rated for 60,000 hrs. L80 with +90 CRI
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

SPECIFICATION:

ED TRIAD+

TYPE

SIZE

SOURCE

RADIANCE

VOLTAGE

DRIVER

MOUNTING

BEAM

REFLECTOR

FINISH

CCT

OPTION

Enter the Product Code into the boxes above.

TYPE

- ☐ DO - Dark Optic

SIZE

- ☐ Feet*
- *1-8 Feet Arm length.

SOURCE

- ☐ 5W/Ft LED
- ☐ 7W/Ft LED
- ☐ 10W/Ft LED

RADIANCE

- ☐ DD - Direct (100%Down)
- *Light Distribution.

VOLTAGE

- ☐ 120V
- ☐ 277V
- ☐ 347V*
- *Not available for all configurations.

DRIVER

- ☐ ST - On/Off
- ☐ DL - 0-10V Dimming (1%)
- ☐ DLO - 0-10V Dimming (to Off)
- ☐ DA4 - DALI D4i
- ☐*
- *Specify dimming protocol.

MOUNTING

- ☐ S6W - 6Ft Cord WH*
- ☐ S6B - 6Ft Cord BK*
- ☐ S Feet**
- ☐ WF - Wall Flush
- ☐ SF - Surface Mount
- ☐ RT - Recessed Trimless
- *Canopy will match the Cord color.
- **Specify Suspension length and color.

BEAM

- ☐ FB - Flood 50°
- ☐ WF - Wide Flood 80°

REFLECTOR

- ☐ SB - Black
- ☐ SW - White
- ☐ SR - Red
- ☐ SL - Silver
- ☐ SG - Gold
- ☐ SM - Gunmetal

FINISH

- ☐ BK - Black*
- ☐ WH - White**
- ☐ CF/RAL ***
- *RAL 9005
- **RAL 9016
- ***Specify required RAL number.

CCT

- ☐ 30K/90CRI - 3000 Kelvin
- ☐ 35K/90CRI - 3500 Kelvin
- ☐ 40K/90CRI - 4000 Kelvin
- ☐*
- *Specify required CCT.

OPTIONS

- ☐ No Options*
- ☐ CB - Casambi/Bluetooth
- ☐**
- *Leave empty.
- **Specify required option.

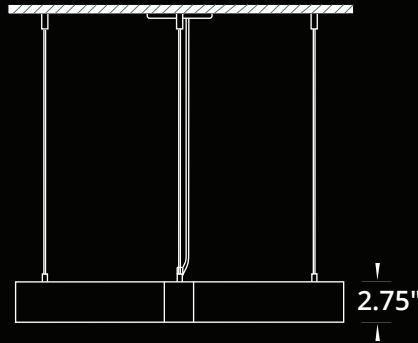
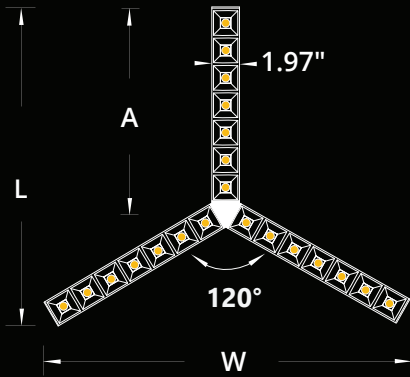
LUMEN OUTPUT W/Ft:

Watts	30K	35K	40K
5W	610 lm	625 lm	640 lm
7W	855 lm	875 lm	895 lm
10W	1225lm	1250 lm	1275 lm



Project:

Type:

SIZE:


Size	A	L x W
1 Foot	11.90	18.70 x 21.60
2 Feet	22.90	35.20 x 40.65
3 Feet	33.90	51.70 x 59.70
4 Feet	44.90	68.20 x 78.75
5 Feet	55.90	84.70 x 97.80
6 Feet	66.90	101.20 x 116.85
7 Feet	77.90	117.70 x 135.90
8 Feet	88.90	134.20 x 154.96

A - Arm Length


L - Total Length

W - Total Width


*All dimensions are in Inches.

**Filler Plate included in Arm length.

RADIANCE:

BEAM ANGLE:


Flood Beam



Wide Flood Beam

REFLECTORS:
SQUARE

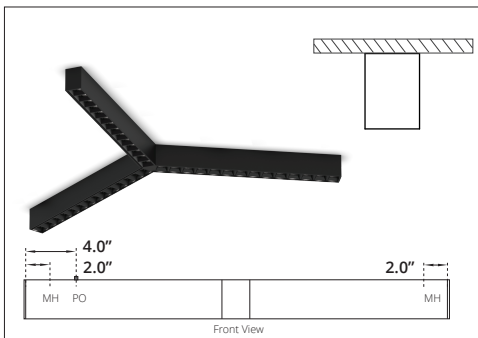
WHITE

SILVER

BLACK

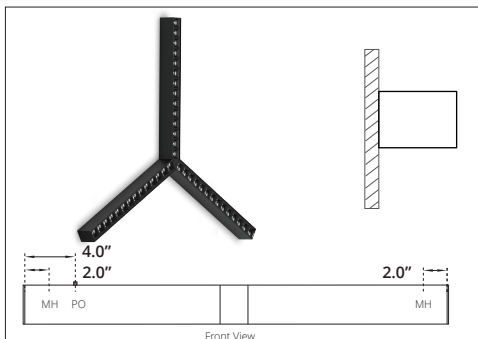
GOLD

RED

GUNMETAL
MOUNTING:

SURFACE MOUNT

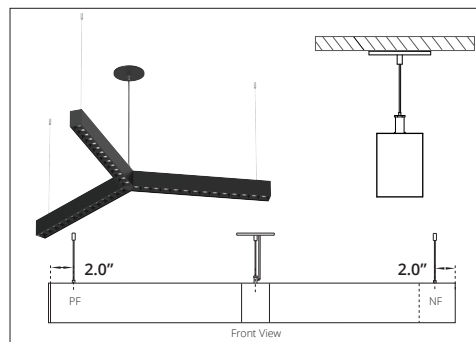
MH - Mounting Hole

PO - Power Opening


WALL FLUSH

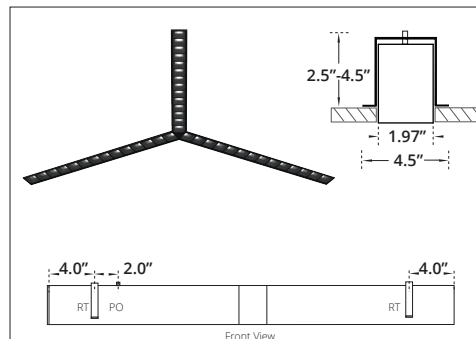
MH - Mounting Hole

PO - Power Opening


SUSPENDED

PF - Power Feed

NF - Non Power Feed


RECESSED TRIMLESS

RT - Recessed Trimless Bracket

PO - Power Opening

*Cutout Dimensions = Total Length x Width of Extrusion.