

Subsonic TUBE+



FEATURES:

- Architectural sound absorbing luminaire combining Eco Felt Polyester with 100% Merino Wool Felt.
- Made from recyclable material available in two standard sizes.
- Polyester is Class1 Fire rated with 0.7 Noise Reduction Coefficient/1" Acoustic.
- Light source: COB LED.
- High efficiency integral reflector combined with opal lens insert provides excellent lighting distribution with 40° Beam.
- Circular internal louver is available in a wide range of finishes.
- Aluminum body of the luminaire comes with built-in-driver.
- LED Spot is rated for 60,000hrs. L70 with + 90CRI.
- Has a proven record in office, commercial and retail installations.
- Custom modifications are available.
- ED luminaires are certified to CSA and UL Standards.

reinventlight

SPECIFICATION:

SI Lenierion.						
Subsonic TUBE+		HEIGHT SOURCE -	RADIANCE VOLTAGE DRIVER — — — — — — — — — — — Enter the Product Code into the boxes above.	MOUNTING LOUVER - LOUVER	TUBE FINISH CCT ACOUSTIC	
TYPE SS - Standard	HEIGHT 12 Inch 16 Inch	SOURCE 15W LED 20W LED 25W LED	RADIANCE DD - Direct (100%Down) *Light Distribution.	VOLTAGE ☐ 120V ☐ 277V	DRIVER ST - Standard (Non-Dimming DL - 0-10V Dimming (1%) DA - DALI BT - Bluetooth	
MOUNTING S4-Suspension 4Feet S6-Suspension 6Feet Feet* *Please specify required Length.	LOUVER WH - White BK - Black SL - Silver		TUBE FINISH WH - White BK - Black SL - Silver* *Supply with White Cord & Canopy	*Please specify dimming method. 30K/90CRI - 3000Kelvin 35K/90CRI - 3500Kelvin 40K/90CRI - 4000Kelvin *Other options are available.		
POLYESTER - BA	ASE LAYER					







WOOL FELT - TOP LAYER























* Please specify Top Layer & Base Layer, For example (145/02)

LUMEN OUTPUT:

Watts	30K	35K	40K
15W	1400 lm	1430 lm	1460 lm
20W	1910 lm	1950 lm	1990 lm
25W	2350 lm	2400 lm	2450 lm









Declare.

Project: Type:

📞 905-830-0339 / 1-800-667-9281




info@edisonlighting.ca



www.edisonlighting.ca





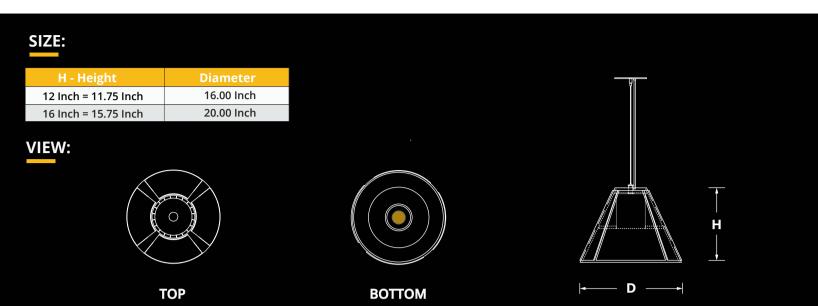

COLOR EXAMPLES:

