

FEATURES:

- ✓ Architectural luminaire with direct or direct-indirect distribution.
- ✓ Light source: LED 5.5" board.
- ✓ Diffused illumination is provided by high efficiency frosted opal lens.
- ✓ Sleek body of the luminaire combines two aluminum side with laser cut metal top enclosure.
- ✓ Suitable for suspended and wall mounted installations.
- ✓ Extruded aluminum body comes with black or white finish.
- ✓ Also available with custom color options.
- ✓ LED Strips are rated for 60,000hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

SPECIFICATION:

ED RING+



Enter the Product Code into the boxes above.

SIZE

- 2 Feet
- 3 Feet
- 4 Feet
- *

* Please specify custom size.

SOURCE

- 25WLED
- 50WLED
- 75WLED*

*Available for 4ft & Custom sizes.
**Other Wattages are available.

RADIANCE

- DD - Direct (100%Down)
- UD - Uneven(70%Down/30%Up)**

*Light Distribution.
**Suspended Configuration only.

VOLTAGE

- 120V
- 277V
- 347V*

*Not available for all configurations.

DRIVER

- ST - Standard (Non-Dimming)
- DL - 0-10V Dimming (1%)
- DA - DALI
- BT - Bluetooth
- *

* Please specify dimming method.

MOUNTING

- C4-Canopy 4Feet*
- C6-Canopy 6Feet*
- C Feet**
- S4-Suspension 4Feet
- S6-Suspension 6Feet
- S Feet**
- WM - Wall Mount
- SF - Surface Mount

*Canopy installation is not available for custom sizes.
**Please specify required Length.

LENS

- OP - Opal

FINISH

- BK - Black
- WH - White
- CF - Custom

CCT

- 30K/90CRI - 3000Kelvin
- 35K/90CRI - 3500Kelvin
- 40K/90CRI - 4000Kelvin
- TW - Tunable White**
(2700K-6500K)

*Other options are available.
**Available with BT control.

OPTIONS

- No Options*
- DC - Dual Circuit**

*Leave Empty.
**Down /Up Control separately.

LUMEN OUTPUT:

Watts	30K	35K	40K
25W	2205 lm	2250 lm	2295 lm
50W	4410 lm	4500 lm	4590 lm
75W	6610 lm	6750 lm	6890 lm





Declare.

Project:

Type:

SIZE:

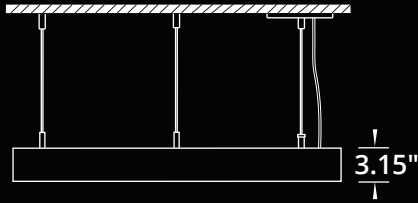

Size	Diameter
2 Feet	25.98 Inch
3 Feet	35.43 Inch
4 Feet	47.24 Inch

RADIANCE:

DIRECT DISTRIBUTION



UNEVEN DISTRIBUTION



MOUNTING:




SUSPENDED - CEILING CANOPY



SUSPENDED - STRAIGHT WIRE



SURFACE MOUNT

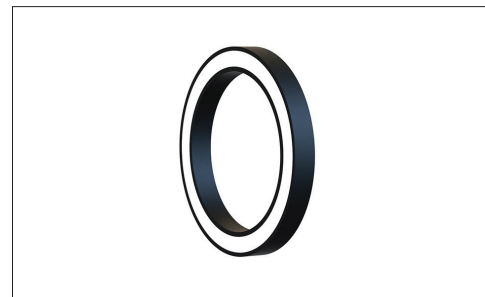

WALL MOUNT