

FEATURES:

- ✓ Architectural linear luminaire with direct or direct/indirect distribution.
- ✓ Light source: LED module.
- ✓ Unique Multioptic lens provide superior lighting distribution with regular 60°, wide 110°, symmetric or asymmetric beam angle.
- ✓ Available for row mounted installations in various lengths.
- ✓ Suitable for surface, suspended, wall mount installations.
- ✓ Extruded aluminum body comes with a black or white finish.
- ✓ Also available with various custom color options.
- ✓ LED's are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

SPECIFICATION:

ED VECTOR X+ — — — — — — — — —

Enter the Product Code into the boxes above.

SIZE

_____ Ft*
*1-8 Ft
Continuous Run.

SOURCE

- ☐ 10 W/Ft
- ☐ 15 W/Ft
- ☐ 20 W/Ft*

* UD lighting distribution only.

RADIANCE

- ☐ DD - Direct (100%Down)
- *Light Distribution.

VOLTAGE

- ☐ UNV - 120/277V
- ☐ 347V*

*Not available for all configurations.

DRIVER

- ☐ ST - On/Off
- ☐ DL - 0-10V Dim (1%)
- ☐ DLO - 0-10V Dim (to Off)
- ☐ DA4 - DALI D4i
- ☐ EM - Emergency Driver*
- ☐ **

*Battery Pack min. 4 Ft section.

**Specify dimming protocol.

MOUNTING

- ☐ S6W - 6Ft Cord WH*
- ☐ S6B - 6Ft Cord BK*
- ☐ S Ft**
- ☐ WM - Wall Mount
- ☐ WF - Wall Flush
- ☐ SF - Surface Mount

*Canopy will match the Cord color.

**Specify Suspension length and color.

BEAM

- ☐ BR - Regular 60°
- ☐ BW - Wide 110°
- ☐ BS - Symmetric
- ☐ BA - Asymmetric

FINISH

- ☐ BK - Black*
- ☐ WH - White**
- ☐ CF/RAL ***

*RAL 9005

**RAL 9016

***Specify required RAL number.

CCT

- ☐ 30K - 3000 Kelvin/90CRI
- ☐ 35K - 3500 Kelvin/90CRI
- ☐ 40K - 4000 Kelvin/90CRI
- ☐ *

*Specify required CCT.

OPTIONS

- ☐ No Options*
- ☐ DC - Dual Circuit**
- ☐ JD - JDRF Autonomy Sensor
- ☐ DOS - Daylight & Occupancy Sensor
- ☐ ***

*Leave empty.

**Control Downlight/Uplight separately.

***Specify required option.

LUMEN OUTPUT W/Ft:

Watts	30K	35K	40K
10W	1280 lm	1310 lm	1340 lm
15W	1915 lm	1965 lm	2015 lm
20W	2554 lm	2620 lm	2686 lm




Declare.

Project:

Type:


SIZE:

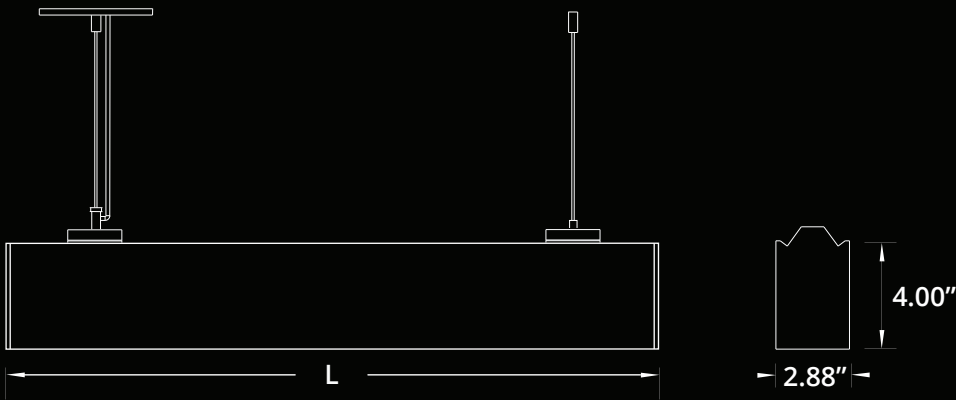


Size	L (LENGTH)	LED Strips
1 Ft	11.24 In	1x11 In
2 Ft	23.00 In	2x11 In
3 Ft	33.75 In	3x11 In
4 Ft	45.50 In	4x11 In
5 Ft	56.75 In	5x11 In
6 Ft	68.00 In	6x11 In
7 Ft	79.25 In	7x11 In
8 Ft	90.25 In	8x11 In

*Total length with endcaps = L + 0.22"


RADIANCE:




MOUNTING:

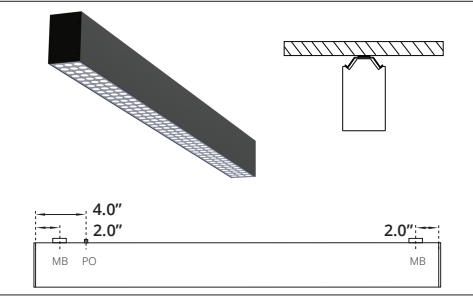

SURFACE MOUNT
MB - Mounting Bracket
PO - Power Opening

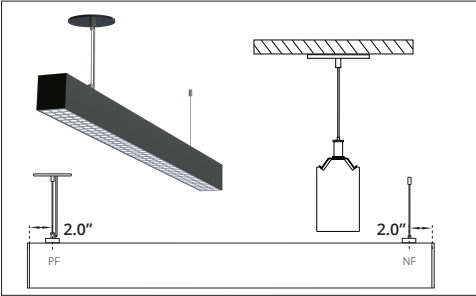


SUSPENDED
PF - Power Feed
NF - Non Power Feed

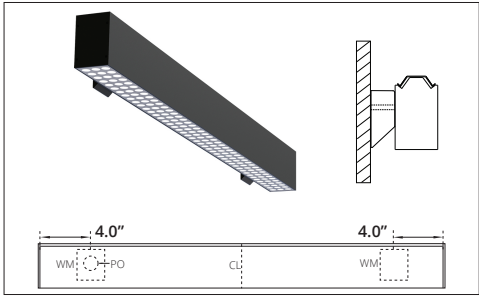


WALL MOUNT
PO - Power Opening
WM - Wall Mount Bracket
*1-3 Ft, single Wall Mount Bracket with Power Opening in the centre.


BEAMS:



REGULAR BEAM



WIDE BEAM

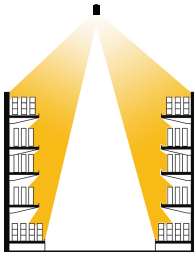

SYMMETRIC BEAM



ASYMMETRIC BEAM