


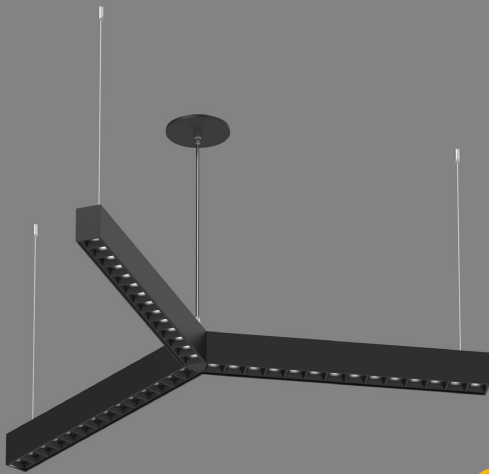

FEATURES:

- ✓ Architectural Y-shaped luminaire with direct distribution.
- ✓ Light source: 11" LED modular board.
- ✓ Dark Optic provides superior lighting distribution with precise low glare illumination.
- ✓ Offered with Flood 50°/10UGR or Wide Flood 80°/15UGR internal optic.
- ✓ Suitable for surface, suspended and recessed installations.
- ✓ Extruded aluminum body comes with a black or white finish.
- ✓ Also available with custom color options.
- ✓ LEDs are rated for 60,000 hrs. L80 with +90 CRI
- ✓ Proven performance in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

SPECIFICATION:

ED TRIAD+

TYPE	SIZE	SOURCE	RADIANCE	VOLTAGE	DRIVER	MOUNTING	BEAM	REFLECTOR	FINISH	CCT	OPTION

Enter the Product Code into the boxes above.

TYPE

☐ DO - Dark Optic

SIZE

☐ ft
2-8 ft Arm length.

SOURCE

☐ 3 W/ft
☐ 5 W/ft
☐ 8 W/ft

RADIANCE

☐ DD - Direct

VOLTAGE

☐ UNV - 120/277V
☐ 347V¹
1. Verify availability.

DRIVER

☐ ST - On/Off
☐ DL - 0-10V Dim (1%)
☐ DLO - 0-10V Dim (to Off)
☐ DLA - 0-10V Dim (Aux)
☐ DA4 - DALI D4i
☐
Specify dimming protocol.

MOUNTING

☐ S6B - 6ft Cord BK¹
☐ S6W - 6ft Cord WH¹
☐ S Feet²
☐ SF - Surface Mount
☐ RT - Recessed Trimless
1 Canopy match the Cord color.
2 Specify Suspension length/color.

BEAM

☐ BF - Flood 50°
☐ BW - Wide 80°

REFLECTOR

☐ SB - Black
☐ SW - White
☐ SR - Red
☐ SG - Gold
☐ SM - Gunmetal

FINISH

☐ BK - Black¹
☐ WH - White²
☐ CF/RAL
1. RAL 9005
2. RAL 9016
Specify required RAL number.

CCT

☐ 30K - 3000 Kelvin/90CRI
☐ 35K - 3500 Kelvin/90CRI
☐ 40K - 4000 Kelvin/90CRI
☐
Specify required CCT.

OPTIONS

☐ No Options¹
☐ EC - Emergency Circuit
☐ CB - Casambi Bluetooth
☐ JD - JDRF Autonomy Sensor (DA4)
☐ DOS - Daylight & Occupancy Sensor (DLA)
☐ Awn - Athena Wireless Node (DLA)
1 Leave empty.

LUMEN OUTPUT W/ft:

Watts	30K	35K	40K
3 W	395 lm	405 lm	415 lm
5 W	660 lm	675 lm	690 lm
8 W	1050 lm	1080 lm	1130 lm





Declare.

Project:

Type:



SIZE:

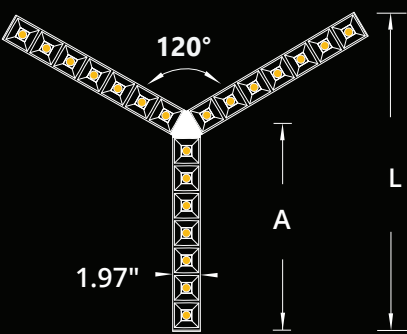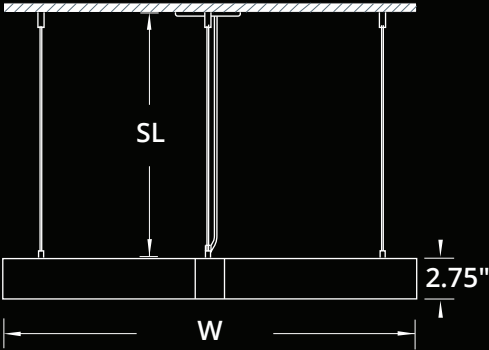

Size	A	L x W
2 ft	22.90 in	35.20 x 40.65 in
3 ft	33.90 in	51.70 x 59.70 in
4 ft	44.90 in	68.20 x 78.75 in
5 ft	55.90 in	84.70 x 97.80 in
6 ft	66.90 in	101.20 x 116.85 in
7 ft	77.90 in	117.70 x 135.90 in
8 ft	88.90 in	134.20 x 154.96 in

A - Arm Length includes the filler plate.
 L - Total Length
 W - Total Width
 SL - Suspension Length

BEAM ANGLE:



REFLECTORS:

SQUARE



WHITE



BLACK



GOLD




RED




GUNMETAL

MOUNTING:

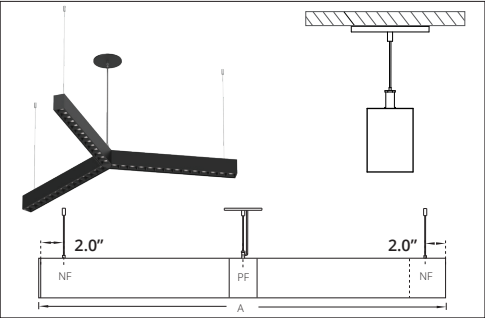


SUSPENDED

PF - Power Feed
 NF - Non Power Feed

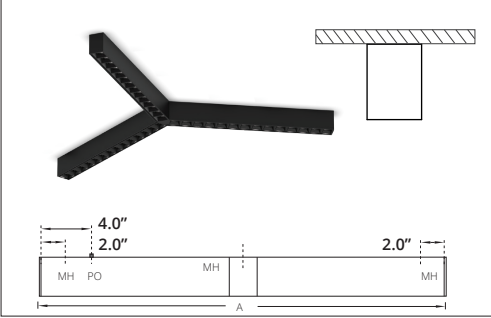

SURFACE MOUNT

PO - Power Opening
 MH - Mounting Hole

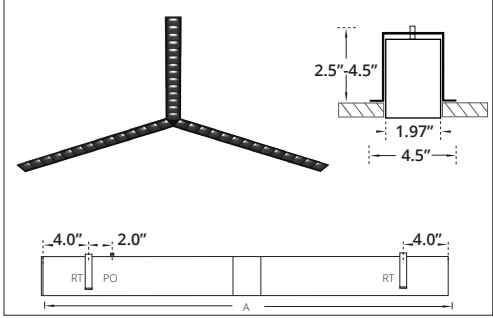

RECESSED TRIMLESS

PO - Power Opening
 RT - Recessed Trimless Bracket
 Cutout Dimensions = Arm Length x Width of Extrusion.