



### FEATURES:

- ✓ Architectural luminaire with direct distribution.
- ✓ Light source: LED Tape.
- ✓ Diffused illumination is provided by high-efficiency frosted opal lens.
- ✓ Sleek body of luminaire is made from curved aluminum profile.
- ✓ Extruded aluminum body comes with a black or white finish.
- ✓ Remote driver enclosure can be surface-mounted or installed in a ceiling cavity. Standard enclosure size: 1.60"H x 3.75"W x 18.5"L.
- ✓ LED tape is rated for 60,000 hrs. L80 with 90 CRI.
- ✓ Proven performance in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

### SPECIFICATION:

**ED ORBIT+**  -  -  -  -  -  -  -  -  -  -  -

Enter the Product Code into the boxes above.

#### TYPE

- S - Shape

#### SIZE

- 3 ft
- 4 ft
- 6 ft
- 8 ft

#### SOURCE

- 5 W/ft
- 7 W/ft
- 10 W/ft

#### RADIANCE

- DD - Direct <sup>1</sup>
  - SD - Side Distribution <sup>2</sup>
1. 100% Downward  
2. 100% Sideways

#### VOLTAGE

- UNV - 120/277V
  - 347V <sup>1</sup>
1. Verify availability.

#### DRIVER

- ST - On/Off
  - DL - 0-10V Dim (1%)
  - DLO - 0-10V Dim (to Off)
  - DL2 - 0-10V Dim (TW)
  - DLA - 0-10V Dim (Aux)
  - DA4 - DALI D4i (TW)
  - CV - Constant Voltage (RGBW)
  -
- Specify dimming protocol.

#### MOUNTING

- S6B - 6 ft Cord BK<sup>1</sup>
- S6W - 6 ft Cord WH<sup>1</sup>
- S  ft<sup>2</sup>

1. Canopy will match the Cord color.  
2. Specify Suspension length and color.

#### LENS

- OP - Opal

#### FINISH

- BK - Black<sup>1</sup>
- WH - White<sup>2</sup>
- CF/RAL

1. RAL 9005  
2. RAL 9003  
Specify required RAL number.

#### CCT

- 30K - 3000 Kelvin/90CRI
- 35K - 3500 Kelvin/90CRI
- 40K - 4000 Kelvin/90CRI
- RGBW<sup>1</sup>
- TW - Tunable White (27K-65K)<sup>2</sup>
- 

1. Available with DMX or CB.  
2. Available with DL2, DA4 or CB.  
Specify required CCT.

#### OPTIONS

- No Options<sup>1</sup>
  - EC - Emergency Circuit
  - CB - Casambi Bluetooth(TW, RGBW)
  - DMX - DMX (RGBW)
  - AWN - Athena Wireless Node (DLA)
1. Leave empty.

### LUMEN OUTPUT W/ft:

Watts	30K	35K	40K
5 W	440 lm	450 lm	460 lm
7 W	618 lm	630 lm	642 lm
10 W	882 lm	900 lm	918 lm




Declare.


Project:

Type:

**PROFILE:**




**3 ft and 4 ft**

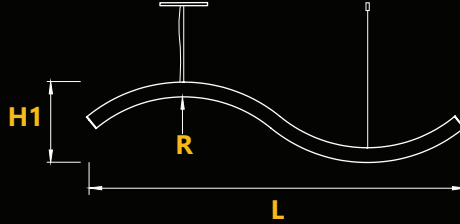


**DIMENSIONS:**

Profile	Size	Length	Height - H1	Radius - R
Width - W	3 ft	37.03 in	7.87 in	15 in
	2.36 in	4 ft	46.75 in	6.00 in
Height - H	6 ft	73.00 in	7.87 in	15 in
	1.45 in	8 ft	92.75 in	6.00 in


**6 ft and 8 ft**

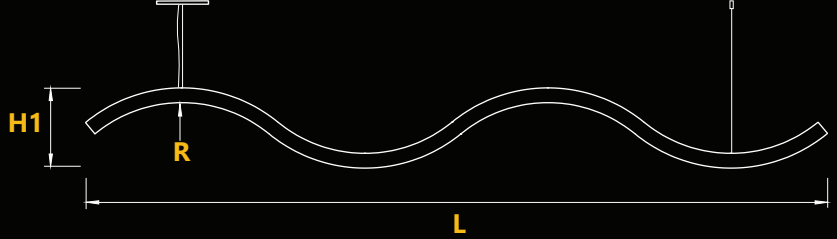


**SIZES AND CONFIGURATIONS:**




3 ft




4 ft




6 ft

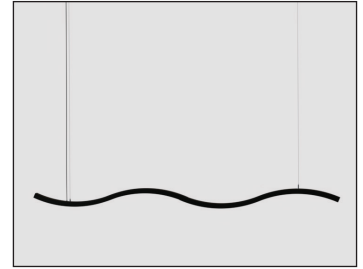


8 ft

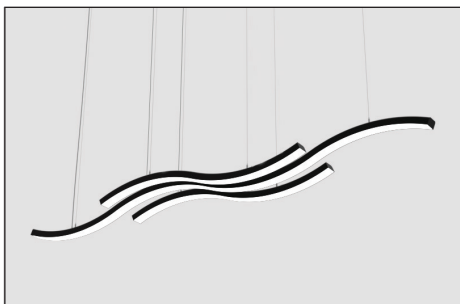

4 ft and 8 ft - Combination

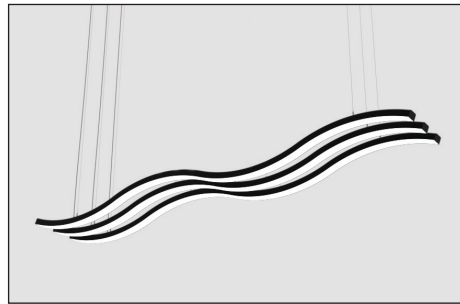

8 ft - Combination

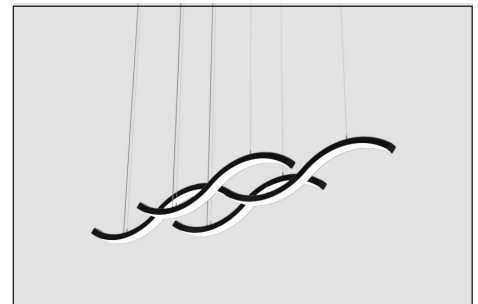

3 ft and 6 ft - Combination