



## FEATURES:

- ✓ Architectural luminaire with direct or direct/indirect distribution.
- ✓ Light source: LED boards.
- ✓ Diffused illumination is provided by a high-efficiency frosted opal lens.
- ✓ Sleek body of the luminaire combines aluminum body with a high-efficiency opal lens.
- ✓ Suitable for surface-mounted, suspended installations.
- ✓ Extruded aluminum body comes with a standard black or white finish.
- ✓ Also available in custom color option.
- ✓ LEDs are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Proven performance in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

## SPECIFICATION:

ED DRUM+

SIZE — SOURCE — RADIANCE — VOLTAGE — DRIVER — MOUNTING — LENS — FINISH — CCT — OPTIONS

Enter the Product Code into the boxes above.

### SIZE

- 2 ft
  - 3 ft
  - 4 ft
  -
- Specify custom size.

### SOURCE

- 25 W
  - 50 W
  - 75 W<sup>1</sup>
1. Available for 4ft & Custom sizes.  
2. Other Wattages are available.

### RADIANCE

- DD - Direct
- UD - Uneven

### VOLTAGE

- UNV - 120/277V
  - 347V<sup>1</sup>
1. Verify availability.

### DRIVER

- ST - On/Off
  - DL - 0-10V Dim (1%)
  - DLO - 0-10V Dim (to Off)
  - DL2 - 0-10V Dim (TW)
  - DLA - 0-10V Dim (Aux)
  - DA4 - DALI D4i (TW)
  - CV - Constant Voltage (RGBW)
  -
- Specify dimming protocol.

### MOUNTING

- C6B - 6 ft Canopy BK<sup>1</sup>
  - C6W - 6 ft Canopy WH<sup>1</sup>
  - C  ft<sup>2</sup>
  - S6B - 6 ft Cord BK<sup>1</sup>
  - S6W - 6 ft Cord WH<sup>1</sup>
  - S  ft<sup>2</sup>
  - R6B - Stem 2 ft BK<sup>1</sup>
  - R6W - Stem 2 ft WH<sup>1</sup>
  - R  ft<sup>2</sup>
  - SF - Surface Mount
1. Canopy match the Cord color.  
2. Specify Suspension length and color.  
3. Stem Mounting is available only for 2ft Drum size.

### LENS

- OP - Opal

### FINISH

- BK - Black<sup>1</sup>
  - WH - White<sup>2</sup>
  - CF/RAL
1. RAL 9005  
2. RAL 9003  
Specify required RAL number.

### CCT

- 30K - 3000 Kelvin/90CRI
  - 35K - 3500 Kelvin/90CRI
  - 40K - 4000 Kelvin/90CRI
  - RGBW<sup>1</sup>
  - TW - Tunable White (27K-65K)<sup>2</sup>
  -
1. Available with DMX or CB.  
2. Available with DL2, DA4 or CB.  
Specify required CCT.

### OPTIONS

- No Options<sup>1</sup>
  - DC - Dual Circuit<sup>2</sup>
  - EC - Emergency Circuit
  - CB - Casambi Bluetooth(TW, RGBW)
  - DMX - DMX (RGBW)
  - AWN - Athena Wireless Node (DLA)
1. Leave empty.  
2. Control Downlight/Uplight separately.

## LUMEN OUTPUT:

Watts	30K	35K	40K
25 W	2610 lm	2650 lm	2690 lm
50 W	5150 lm	5250 lm	5380 lm
75 W	7720 lm	7875 lm	8030 lm





Declare.



Project:

Type:

**SIZE:**

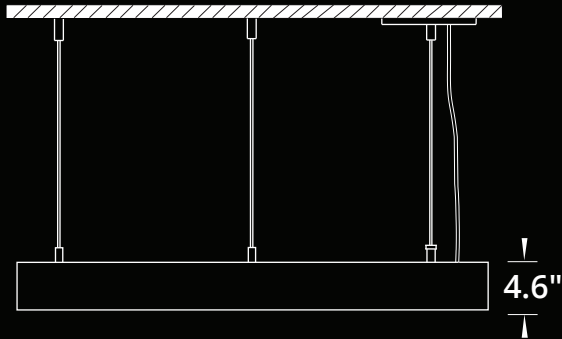


**RADIANCE:**

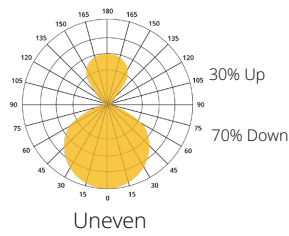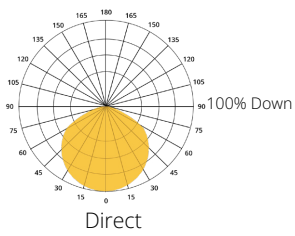


Size	Diameter
2 ft	23.60 in
3 ft	35.40 in
4 ft	47.20 in

**MOUNTING:**

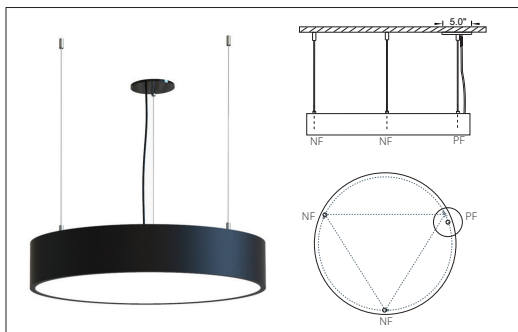


**SUSPENDED - STRAIGHT WIRE**

PF - Power Feed  
NF - Non Power Feed

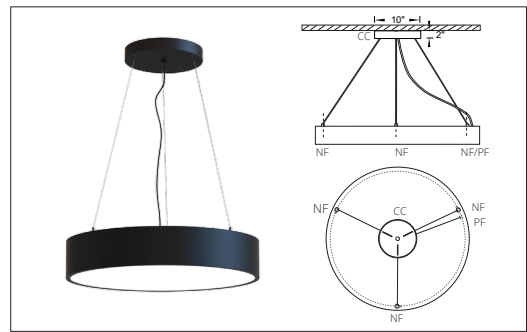


**SUSPENDED - CEILING CANOPY**

CC - Ceiling Canopy - Available for 2-3-4 ft sizes  
PF - Power Feed  
NF - Non Power Feed

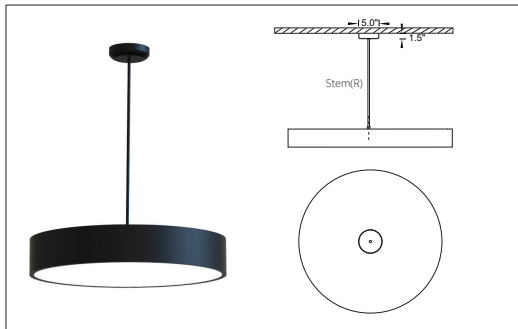

**SUSPENDED - STEM**

Available only for 2ft Drum size  
3/8" IPS Stem with Power Feed

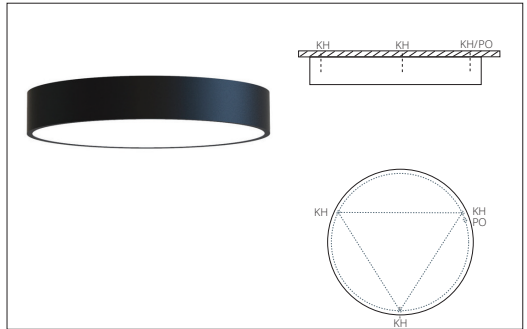

**SURFACE MOUNT - (SF)**