



FEATURES:

- ✓ Architectural acoustic luminaire with direct lighting distribution.
- ✓ Light source: COB LED.
- ✓ High efficiency integral reflector combined with an opal lens insert provides excellent lighting distribution.
- ✓ Extruded aluminum body comes with a built-in-driver and available in black or white finish.
- ✓ Removable fin shaped Eco-Felt Baffles are attached to the top and face plate.
- ✓ Available in two standard sizes with various baffle shapes.
- ✓ Class1 Fire rated with 0.7 Noise Reduction Coefficient/1" Acoustic.
- ✓ LED spot is rated for 60,000 hrs. L70 with +90 CRI.
- ✓ Suitable for suspended installations.
- ✓ Custom finishes and modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

SPECIFICATION:

Sonic PIPE+ - - - - - - - - - - -

Enter the Product Code into the boxes above.

TYPE

☐ SP - Sphere

HEIGHT

☐ 16in

SOURCE

☐ 10W
☐ 15W
☐ 20W

RADIANCE

☐ DD - Direct

VOLTAGE

☐ UNV - 120/277V

DRIVER

☐ ST - On/Off
☐ DL - 0-10V Dim (1%)
☐ DA4 - DALI D4i
☐
Specify dimming protocol.

MOUNTING

☐ S6B - 6ft Cord BK ¹
☐ S6W - 6ft Cord WH ¹
☐ S ft²
¹. Canopy match the Cord color
². Specify Suspension length and color.

LENS



☐ OP - Opal

ED PIPE+ FINISH


☐ BK - Black ¹
☐ WH - White ²
¹. RAL 9005
². RAL 9003

CCT

☐ 30K - 3000 Kelvin/90CRI
☐ 35K - 3500 Kelvin/90CRI
☐ 40K - 4000 Kelvin/90CRI
☐
Specify required CCT.



ACOUSTIC FINISH

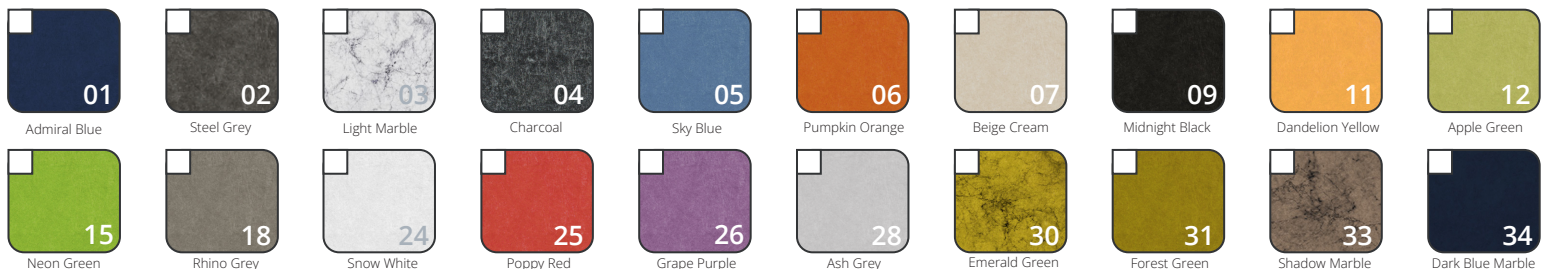

LUMEN OUTPUT:

Watts	30K	35K	40K
10W	930lm	950lm	990lm
15W	1395lm	1425lm	1475lm
20W	1860lm	1900lm	1940lm



Declare.

Project:

Type: