



FEATURES:

- ✓ Architectural luminaire with direct or direct-indirect distribution.
- ✓ Light source: LED 5.5" board.
- ✓ Diffused illumination is provided by high efficiency frosted opal lens.
- ✓ Sleek body of the luminaire combines two aluminum side with laser cut metal top enclosure.
- ✓ Suitable for suspended and wall mounted installations.
- ✓ Extruded aluminum body comes with black or white finish.
- ✓ Also available with custom color options.
- ✓ LED Strips are rated for 60,000hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

SPECIFICATION:

ED RING+

SIZE

SOURCE

RADIANCE

VOLTAGE

DRIVER

MOUNTING

LENS

FINISH

CCT

OPTIONS

Enter the Product Code into the boxes above.

SIZE

- ☐ 2 Feet
- ☐ 3 Feet
- ☐ 4 Feet
- ☐ *

* Please specify custom size.

SOURCE

- ☐ 25WLED
- ☐ 50WLED
- ☐ 75WLED*

*Available for 4ft & Custom sizes.
**Other Wattages are available.

RADIANCE

- ☐ DD - Direct (100%Down)
- ☐ UD - Uneven(70%Down/30%Up)**

*Light Distribution.
**Suspended Configuration only.

VOLTAGE

- ☐ 120V
- ☐ 277V
- ☐ 347V*

*Not available for all configurations.

DRIVER

- ☐ ST - Standard (Non-Dimming)
- ☐ DL - 0-10V Dimming (1%)
- ☐ DA - DALI
- ☐ BT - Bluetooth
- ☐ *

* Please specify dimming method.

MOUNTING

- ☐ C4-Canopy 4Feet*
- ☐ C6-Canopy 6Feet*
- ☐ C Feet**
- ☐ S4-Suspension 4Feet
- ☐ S6-Suspension 6Feet
- ☐ S Feet**
- ☐ WM - Wall Mount
- ☐ SF - Surface Mount

*Canopy installation is not available for custom sizes.
**Please specify required Length.

LENS

- ☐ OP - Opal

FINISH

- ☐ BK - Black
- ☐ WH - White
- ☐ CF - Custom

RAL#

CCT

- ☐ 30K/90CRI - 3000Kelvin
- ☐ 35K/90CRI - 3500Kelvin
- ☐ 40K/90CRI - 4000Kelvin
- ☐ TW - Tunable White**
(2700K-6500K)

*Other options are available.
**Available with BT control.

OPTIONS

- ☐ No Options*
- ☐ DC - Dual Circuit**

*Leave Empty.
**Down /Up Control separately.

LUMEN OUTPUT:

Watts	30K	35K	40K
25W	2205 lm	2250 lm	2295 lm
50W	4410 lm	4500 lm	4590 lm
75W	6610 lm	6750 lm	6890 lm





Declare.

Project:

Type:

SIZE:

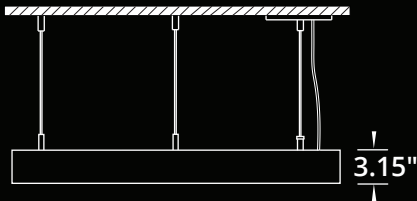

Size	Diameter
2 Feet	25.98 Inch
3 Feet	35.43 Inch
4 Feet	47.24 Inch

RADIANCE:

DIRECT DISTRIBUTION



UNEVEN DISTRIBUTION



MOUNTING:




SUSPENDED - STRAIGHT WIRE



SUSPENDED - CEILING CANOPY



SURFACE MOUNT

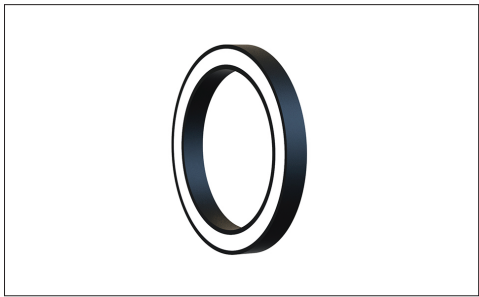

WALL MOUNT