

FEATURES:

- ✓ Architectural Y-shaped luminaire with direct distribution.
- ✓ Light source: 11" LED modular board.
- ✓ Dark Optic provides superior lighting distribution with precise low glare illumination.
- ✓ Offered with Flood 50°/10UGR or Wide Flood 80°/15UGR internal optic.
- ✓ Suitable for surface, suspended and recessed installations.
- ✓ Extruded aluminum body comes with a black or white finish.
- ✓ Also available with custom color options.
- ✓ LEDs are rated for 60,000 hrs. L80 with +90 CRI
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

SPECIFICATION:

ED TRIAD+

TYPE

SIZE

SOURCE

RADIANCE

VOLTAGE

DRIVER

MOUNTING

BEAM

REFLECTOR

FINISH

CCT

OPTION

Enter the Product Code into the boxes above.

TYPE

☐ DO - Dark Optic

SIZE

☐ Feet\*  
\*1-8 Feet Arm length.

SOURCE

- ☐ 3W/FT LED  
☐ 5W/FT LED  
☐ 8W/FT LED

RADIANCE

☐ DD - Direct (100%Down)  
\*Light Distribution.

VOLTAGE

- ☐ 120V  
☐ 277V  
☐ 347V\*  
\*Not available for all configurations.

DRIVER

- ☐ ST - On/Off  
☐ DL - 0-10V Dim (1%)  
☐ DLO - 0-10V Dim (to Off)  
☐ DA4 - DALI D4i  
☐ \*  
\*Specify dimming protocol.

MOUNTING

- ☐ S6W - 6Ft Cord WH\*  
☐ S6B - 6Ft Cord BK\*  
☐ S  Feet\*\*  
☐ WF - Wall Flush  
☐ SF - Surface Mount  
☐ RT - Recessed Trimless

\*Canopy will match the Cord color.  
\*\*Specify Suspension length and color.

BEAM

- ☐ FB - Flood 50°  
☐ WF - Wide Flood 80°

REFLECTOR

- ☐ SB - Black  
☐ SW - White  
☐ SR - Red  
☐ SL - Silver  
☐ SG - Gold  
☐ SM - Gunmetal

FINISH

- ☐ BK - Black\*  
☐ WH - White\*\*  
☐ CF/RAL  \*\*\*  
\*RAL 9005  
\*\*RAL 9016  
\*\*\*Specify required RAL number.

CCT

- ☐ 30K - 3000 Kelvin/90CRI  
☐ 35K - 3500 Kelvin/90CRI  
☐ 40K - 4000 Kelvin/90CRI  
☐ \*  
\*Specify required CCT.

OPTIONS

- ☐ No Options\*  
☐ CB - Casambi/Bluetooth  
☐ \*\*  
\*Leave empty.  
\*\*Specify required option.

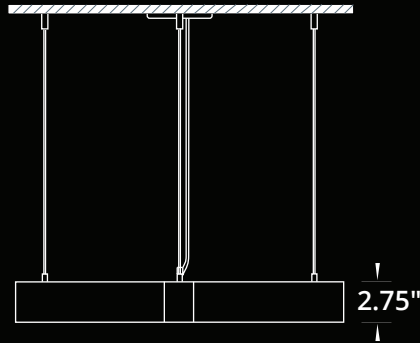
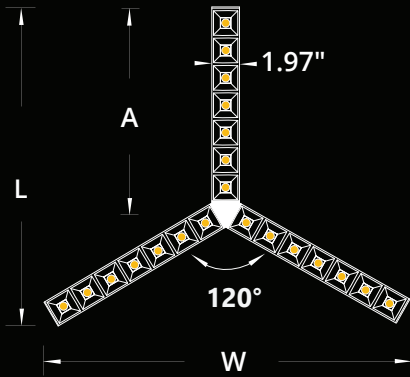
LUMEN OUTPUT W/Ft:

Watts	30K	35K	40K
3W	395 lm	405 lm	415 lm
5W	660 lm	675 lm	690 lm
8W	1050 lm	1080 lm	1130 lm



Project:

Type:

**SIZE:**


Size	A	L x W
1 Foot	11.90	18.70 x 21.60
2 Feet	22.90	35.20 x 40.65
3 Feet	33.90	51.70 x 59.70
4 Feet	44.90	68.20 x 78.75
5 Feet	55.90	84.70 x 97.80
6 Feet	66.90	101.20 x 116.85
7 Feet	77.90	117.70 x 135.90
8 Feet	88.90	134.20 x 154.96

A - Arm Length


L - Total Length

W - Total Width


\*All dimensions are in Inches.

\*\*Filler Plate included in Arm length.

**RADIANCE:**

**BEAM ANGLE:**


Flood Beam



Wide Flood Beam

**REFLECTORS:**
**SQUARE**

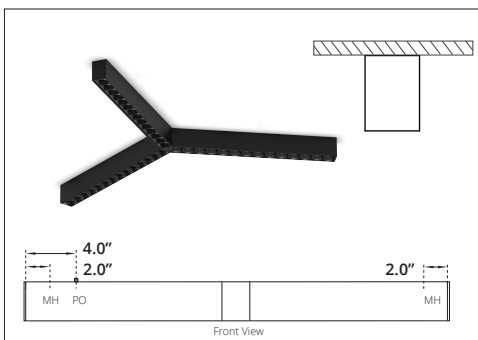
**WHITE**

**SILVER**

**BLACK**

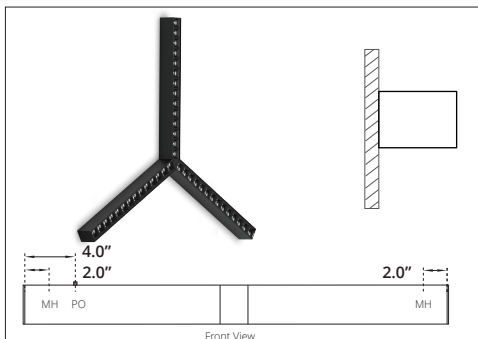
**GOLD**

**RED**

**GUNMETAL**
**MOUNTING:**

**SURFACE MOUNT**

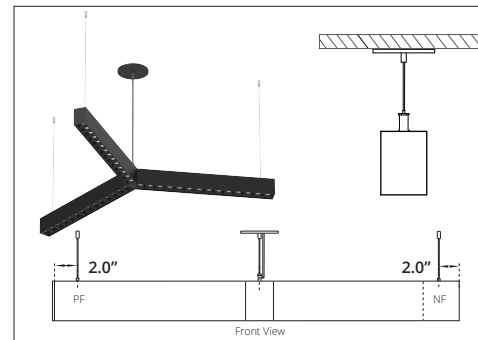
MH - Mounting Hole

PO - Power Opening


**WALL FLUSH**

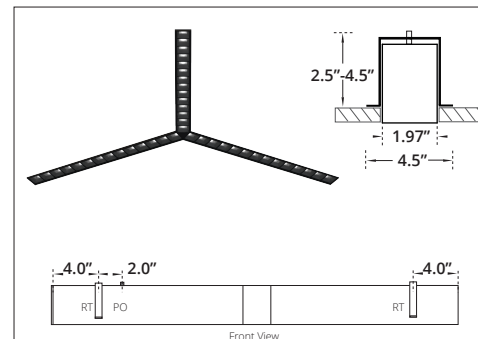
MH - Mounting Hole

PO - Power Opening


**SUSPENDED**

PF - Power Feed

NF - Non Power Feed


**RECESSED TRIMLESS**

RT - Recessed Trimless Bracket

PO - Power Opening

\*Cutout Dimensions = Total Length x Width of Extrusion.