



## FEATURES:

- ✓ Architectural acoustic luminaire with direct lighting distribution.
- ✓ Made from recyclable plastic material available in different thicknesses.
- ✓ Class1 Fire rated with 0.7 Noise Reduction Coefficient / 1" Acoustic.
- ✓ Also available with custom colour options.
- ✓ Light source: LED boards.
- ✓ Diffused illumination is provided by frosted opal lens.
- ✓ Extruded aluminum body comes with a built-in-driver and available in a black or white finish.
- ✓ LED strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

## SPECIFICATION:

**Sonic DRUM+**

TYPE	HEIGHT	SIZE	SOURCE	RADIANCE	VOLTAGE	DRIVER	MOUNTING	LENS	DRUM FINISH	CCT	ACOUSTIC

Enter the Product Code into the boxes above.

### TYPE

- ☐ FV - Flush Vcut
- ☐ FR - Flush Regular
- ☐ RA- Recessed Angle
- ☐

Specify custom type.

### HEIGHT

- ☐ 12 in
- ☐ 16 in
- ☐ 24 in

### SIZE

- ☐ 2 ft
- ☐ 3 ft
- ☐ 4 ft

### SOURCE

- ☐ 25 W
- ☐ 50 W
- ☐ 75 W<sup>1</sup>

1. Available for 4 ft size.

### RADIANCE

- ☐ DD - Direct

### VOLTAGE

- ☐ UNV - 120/277V
- ☐ 347V<sup>1</sup>

1. Verify availability.

### DRIVER

- ☐ ST - On/Off
- ☐ DL - 0-10V Dim (1%)
- ☐ DLO - 0-10V Dim (to Off)
- ☐ DL2 - 0-10V Dim (TW)
- ☐ CV - Constant Voltage (RGBW)
- ☐

Specify dimming protocol.

### MOUNTING

- ☐ S6B - 6ft Cord BK<sup>1</sup>
- ☐ S6W - 6ft Cord WH<sup>1</sup>
- ☐ S  ft<sup>2</sup>
- ☐ SF - Surface Mount

1. Canopy match the Cord color.  
2. Specify Suspension length/color.

### LENS

- ☐ OP - Opal

### ED DRUM+ FINISH

- ☐ BK - Black<sup>1</sup>
- ☐ WH - White<sup>2</sup>


1. RAL 9005  
2. RAL 9003

### CCT

- ☐ 30K - 3000 Kelvin/90CRI
- ☐ 35K - 3500 Kelvin/90CRI
- ☐ 40K - 4000 Kelvin/90CRI
- ☐ RGBW<sup>1</sup>
- ☐ TW - Tunable White (27K-65K)<sup>2</sup>
- ☐

1. Available with CV.  
2. Available with DL2.  
Specify required CCT.

## ACOUSTIC FINISH

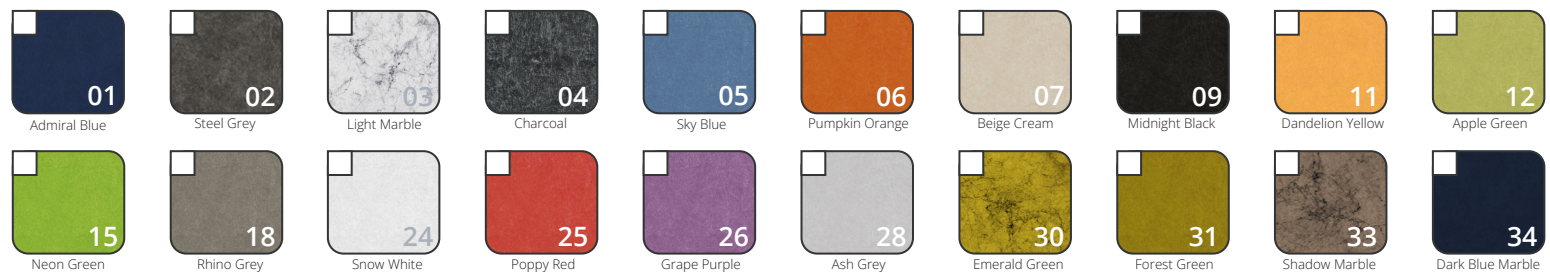

## LUMEN OUTPUT:



Watts	30K	35K	40K
25 W	2610 lm	2650 lm	2690 lm
50 W	5150 lm	5250 lm	5380 lm
75 W	7720 lm	7875 lm	8030 lm



Project:

Type:

SIZE:

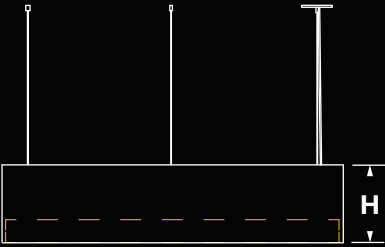

H - Height		D - Diameter	
12 in = 11.75 in	2 ft	24.875 in	
16 in = 15.75 in	3 ft	36.675 in	
24 in = 23.75 in	4 ft	48.485 in	

FR-FLUSH REGULAR



MOUNTING:



FV - FLUSH VCUT



FR - FLUSH REGULAR



SF - SURFACE MOUNT



RA - RECESSED ANGLE

FINISHES:



11



28



18



25