

## FEATURES:

- ✓ Architectural luminaire with direct lighting distribution.
- ✓ Light source: COB LED.
- ✓ High efficiency integral reflector combined with opal lens insert provide excellent lighting distribution.
- ✓ Square internal louver is available in a wide range of finishes.
- ✓ Aluminum body of the luminaire comes with built-in-driver.
- ✓ Suitable for surface mounted installations.
- ✓ LED Spot is rated for 60,000hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

## SPECIFICATION:

**ED CUBIX+**  TYPE x  SOURCE —  RADIANCE —  VOLTAGE —  DRIVER —  MOUNTING —  REFLECTOR —  FINISH —  CCT

Enter the Product Code into the boxes above.

### TYPE

- ☐ 1-Single
- ☐ 2-Double
- ☐ 3-Triple

### SOURCE

- ☐ 5W LED
- ☐ 10W LED
- ☐ 15W LED

### RADIANCE

- ☐ DD - Direct

### VOLTAGE

- ☐ UNV - 120/277V

### DRIVER

- ☐ ST - On/Off
  - ☐ DL - 0-10V Dim (1%)
  - ☐ DA4 - DALI D4i
  - ☐
- Specify dimming protocol.

### MOUNTING

- ☐ SF - Surface Mount

### REFLECTOR

- ☐ WH - White
- ☐ BK - Black
- ☐ SL - Silver
- ☐ GL - Gold
- ☐ RG - Rose Gold

### FINISH

- ☐ BK - Black<sup>1</sup>
  - ☐ WH - White<sup>2</sup>
1. RAL 9005  
2. RAL 9016

### CCT


- ☐ 30K - 3000 Kelvin/90CRI
  - ☐ 35K - 3500 Kelvin/90CRI
  - ☐ 40K - 4000 Kelvin/90CRI
  - ☐
- Specify required CCT.

## DIMENSIONS:

| Unit   | Length    | Height   | Width    |
|--------|-----------|----------|----------|
| Single | 3.750 in  | 4.500 in | 3.750 in |
| Double | 7.375 in  | 4.500 in | 3.750 in |
| Triple | 10.937 in | 4.500 in | 3.750 in |

## LUMEN OUTPUT:

| Watts | 30K     | 35K     | 40K     |
|-------|---------|---------|---------|
| 10 W  | 930 lm  | 950 lm  | 970 lm  |
| 15 W  | 1395 lm | 1425 lm | 1450 lm |

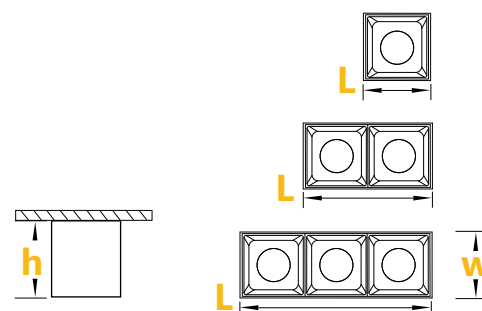

Project:

Type: