



FEATURES:

- ✓ Architectural luminaire with direct lighting distribution.
- ✓ Light source: LED light engine with integrated driver.
- ✓ Available with an aluminum reflector with a white interior finish.
- ✓ Suitable for suspended installation.
- ✓ Available with wireless control through the ERP Tunable White app (iOS).
- ✓ Available in standard black or white finishes, with custom color options.
- ✓ LED light is rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office and commercial installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

SPECIFICATION:

ED ZEN+ — — — — — — — — —

Enter the Product Code into the boxes above.

SIZE

- ☐ SM - Small
☐ LG - Large

SOURCE

- ☐ 15 W
☐ 25 W
☐ 35 W¹
 1. Static color only.

RADIANCE

- ☐ DD - Direct

VOLTAGE

- ☐ UNV - 120/277V
☐ 347V¹
 1. Verify availability.

DRIVER

- ☐ ST - On/Off
☐ DL - 0-10V Dim (1%)
☐ DL2 - 0-10V Dim (TW)
☐
 Specify dimming protocol.

MOUNTING

- ☐ S6B - 6ft Cord BK¹
☐ S6W - 6ft Cord WH¹
☐ S ft²
 1. Canopy match the Cord color.
 2. Specify Suspension length/color.

REFLECTOR

- ☐ WH - White¹
☐ CF/RAL

Inside Finish
 1. RAL 9003
 Specify required RAL number.

FINISH

- ☐ BK - Black¹
☐ WH - White²
☐ CF/RAL

Body Finish
 1. RAL 9005
 2. RAL 9003
 Specify required RAL number.

CCT


- ☐ 30K - 3000 Kelvin/90CRI
☐ 35K - 3500 Kelvin/90CRI
☐ 40K - 4000 Kelvin/90CRI
☐ TW - Tunable White (27K-65K)¹
☐
 1. Available with DL2.
 Specify required CCT.

DIMENSIONS:

Size	Height	Width
SM	13.75 in	12.25 in
LG	17.50 in	17.50 in

LUMEN OUTPUT:

Watts	30K	35K	40K
15 W	1950 lm	2000 lm	2050 lm
25 W	2450 lm	2500 lm	2550 lm
35 W	3900 lm	4000 lm	4100 lm

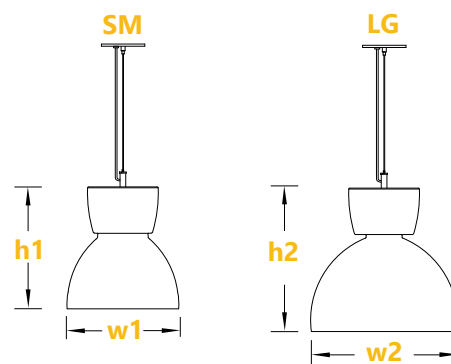

Project:

Type: