

FEATURES:

- ✓ Architectural luminaire with direct distribution.
- ✓ Light source: 11" LED modular board.
- ✓ Dark Optic provides superior lighting distribution with precise low glare illumination.
- ✓ Offered with Flood 50°/10UGR or Wide Flood 80°/15UGR internal optic.
- ✓ Suitable for surface, suspended and recessed installations.
- ✓ Extruded aluminum body comes with a black or white finish.
- ✓ Also available with custom color options.
- ✓ LEDs are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

SPECIFICATION:

ED SQUARE+ - - - - - - - - - - - -

Enter the Product Code into the boxes above.

TYPE

- ☐ DO - Dark Optic

SIZE

- ☐ Feet*
*1-8 Feet Arm length.

SOURCE

- ☐ 5W/Ft LED
☐ 7W/Ft LED
☐ 10W/Ft LED

RADIANCE

- ☐ DD - Direct (100%Down)
*Light Distribution.

VOLTAGE

- ☐ 120V
☐ 277V
☐ 347V*
*Not available for all configurations.

DRIVER

- ☐ ST - On/Off
☐ DL - 0-10V Dimming (1%)
☐ DLO - 0-10V Dimming (to Off)
☐ DA4 - DALI D4i
☐ *
*Specify dimming protocol.

MOUNTING

- ☐ S6W - 6Ft Cord WH*
☐ S6B - 6Ft Cord BK*
☐ S Feet**
☐ WF - Wall Flush
☐ SF - Surface Mount
☐ RT - Recessed Trimless

*Canopy will match the Cord color.
**Specify Suspension length and color.

BEAM

- ☐ FB - Flood 50°
☐ WF - Wide Flood 80°

REFLECTOR

- ☐ SB - Black
☐ SW - White
☐ SR - Red
☐ SL - Silver
☐ SG - Gold
☐ SM - Gunmetal

FINISH

- ☐ BK - Black*
☐ WH - White**
☐ CF/RAL ***
*RAL 9005
**RAL 9016
***Specify required RAL number.

CCT

- ☐ 30K/90CRI - 3000 Kelvin
☐ 35K/90CRI - 3500 Kelvin
☐ 40K/90CRI - 4000 Kelvin
☐ *
*Specify required CCT.

OPTIONS

- ☐ No Options*
☐ CB - Casambi/Bluetooth
☐ **
*Leave empty.
**Specify required option.

LUMEN OUTPUT W/Ft:



Watts	30K	35K	40K
5W	610 lm	625 lm	640 lm
7W	855 lm	875 lm	895 lm
10W	1225lm	1250 lm	1275 lm



Project:

Type:

SIZE:

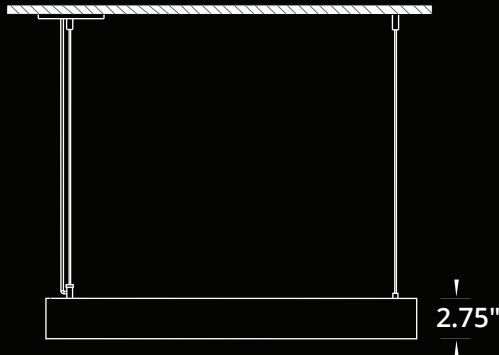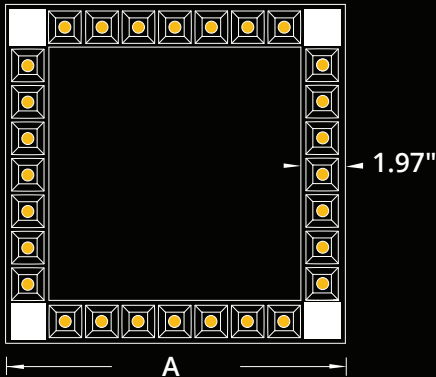

Size	A
1 Foot	15.50 Inch
2 Foot	26.50 Inch
3 Foot	37.50 Inch
4 Foot	48.50 Inch
5 Foot	59.50 Inch
6 Foot	70.50 Inch
7 Foot	81.50 Inch
8 Foot	92.50 Inch


A - Arm Length

*Arm Length includes the filler plate.

RADIANCE:




MOUNTING:

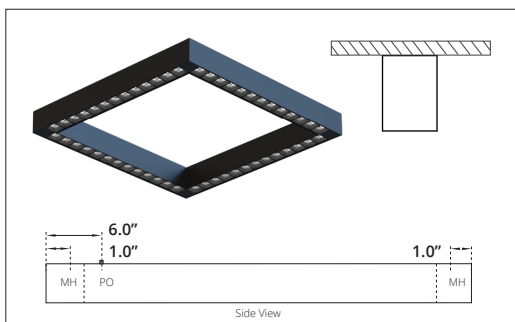

SURFACE MOUNT


MH - Mounting Hole
PO - Power Opening

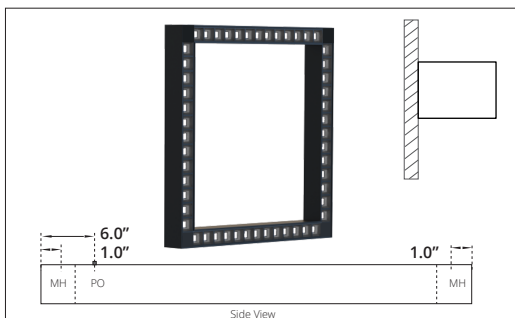


WALL FLUSH

MH - Mounting Hole
PO - Power Opening

BEAM ANGLE:



Flood Beam



Wide Flood Beam

REFLECTORS:

SQUARE



WHITE



SILVER



BLACK



GOLD




RED



GUNMETAL

SUSPENDED

PF - Power Feed
NF - Non Power Feed

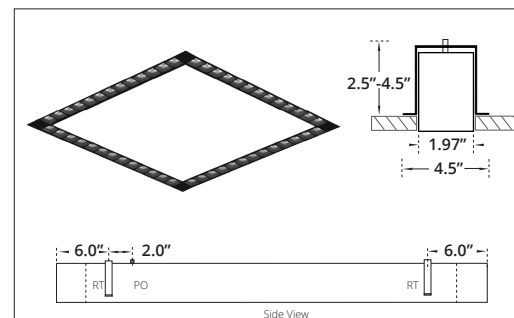

RECESSED TRIMLESS

RT - Recessed Trimless Bracket
PO - Power Opening

*Cutout Dimensions = Total Length x Width of Extrusion.