



FEATURES:

- ✓ Architectural luminaire with direct lighting distribution.
- ✓ Light source: COB LED.
- ✓ High efficiency integral reflector combined with opal lens insert provide excellent lighting distribution.
- ✓ Available with Spot 25°, Flood 45° and Wide Flood 60° beam angle.
- ✓ Aluminum body of the luminaire comes with built-in-driver.
- ✓ Suitable for suspended installations.
- ✓ LED Spot is rated for 60,000hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

SPECIFICATION:

ED PIPE+

SIZE	SOURCE	RADIANCE	VOLTAGE	DRIVER	MOUNTING	BEAM	FINISH	CCT

Enter the Product Code into the boxes above.

SIZE

- ☐ 11 in
- ☐ 22 in
- ☐ 33 in

SOURCE

- ☐ 10W LED
- ☐ 15W LED
- ☐ 20W LED

RADIANCE

- ☐ DD - Direct

VOLTAGE

- ☐ UNV - 120/277V

DRIVER

- ☐ ST - On/Off
 - ☐ DL - 0-10V Dim (1%)
 - ☐ DA4 - DALI D4i
 - ☐
- Specify dimming protocol.

MOUNTING

- ☐ S4B - 4 ft Cord BK¹
 - ☐ S4W - 4 ft Cord WH²
 - ☐ S ft
1. Canopy match the Cord color.
2. Specify Suspension length.

BEAM

- ☐ BS - Spot 25°
- ☐ BF - Flood 45°
- ☐ BW - Wide 60°

FINISH

- ☐ BK - Black¹
 - ☐ WH - White²
1. RAL 9005
2. RAL 9003

CCT


- ☐ 30K - 3000 Kelvin/90CRI
 - ☐ 35K - 3500 Kelvin/90CRI
 - ☐ 40K - 4000 Kelvin/90CRI
 - ☐
- Specify required CCT.

DIMENSIONS:

Width		Canopy
4.0"		5.0"
Height		
h1	h2	h3
11.0"	22.0"	33.0"

LUMEN OUTPUT:

Watts	30K	35K	40K
35 W	3420 lm	3500 lm	3580 lm
45 W	4400 lm	4500 lm	4600 lm

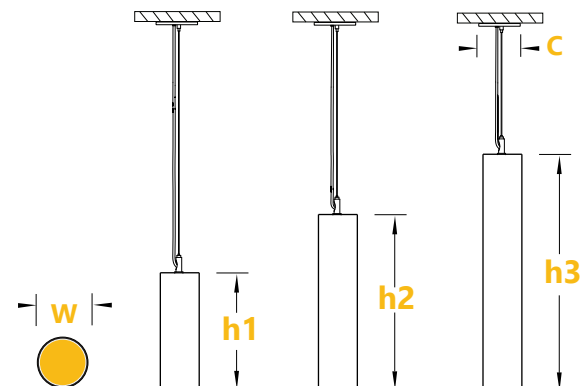

Project:

Type: