


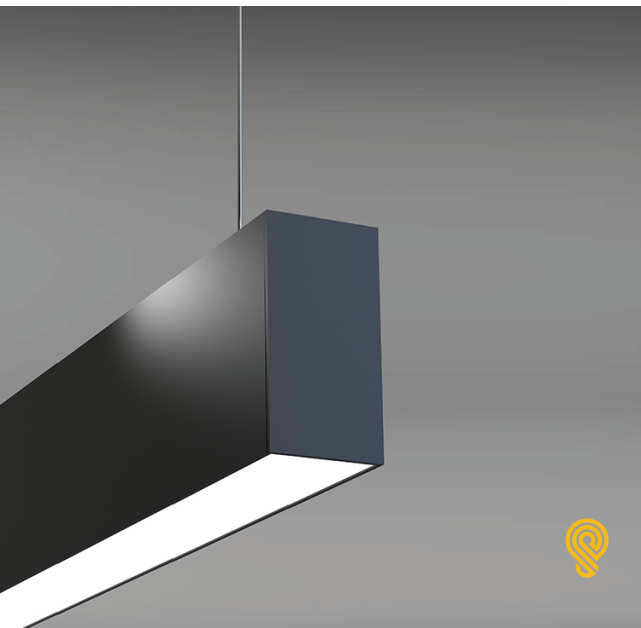

FEATURES:

- ✓ Architectural linear luminaire with direct or direct/indirect distribution.
- ✓ Light source: LED board or LED strip.
- ✓ Even illumination is provided by a high efficiency opal lens.
- ✓ Available for row-mounted installations in various lengths.
- ✓ Suitable for suspended, wall mounted installations.
- ✓ Extruded aluminum body comes with a black or white finish.
- ✓ Also available with various custom color options.
- ✓ LED Strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

SPECIFICATION:

ED VECTOR5+ — — — — — — — — — —

Enter the Product Code into the boxes above.

SIZE

_____ ft
 1-8 ft
 Continuous Run
 (0.5 ft Increments)

SOURCE

- ☐ 5 W/ft
☐ 7 W/ft
☐ 10 W/ft

RADIANCE

- ☐ DD - Direct
☐ ED - Even
☐ UD - Uneven¹

1. Available in sizes 4 ft and up.

VOLTAGE

- ☐ UNV - 120/277V
☐ 347V¹
 1. Verify availability.

DRIVER

- ☐ ST - On/Off
☐ DL - 0-10V Dim (1%)
☐ DLO - 0-10V Dim (to Off)
☐ DL2 - 0-10V Dim (TW)
☐ DLA - 0-10V Dim (Aux)
☐ DA4 - DALI D4i
☐ CV - Constant Voltage (RGBW)
☐

Specify dimming protocol.

MOUNTING

- ☐ S6B - 6Ft Cord BK¹
☐ S6W - 6Ft Cord WH¹
☐ S Feet²
☐ WM - Wall Mount
☐ WF - Wall Flush

1. Canopy match the Cord color.
 2. Specify Suspension length/color.

LENS

- ☐ OP - Opal

FINISH

- ☐ BK - Black¹
☐ WH - White²
☐ CF/RAL
 1. RAL 9005
 2. RAL 9016
 Specify required RAL number.

CCT

- ☐ 30K - 3000 Kelvin/90CRI
☐ 35K - 3500 Kelvin/90CRI
☐ 40K - 4000 Kelvin/90CRI
☐ RGBW¹
☐ TW - Tunable White (27K-65K)²
☐

1. Available with DMX or CB.
 2. Available with DL2, DA4 or CB.
 Specify required CCT.

OPTIONS

- ☐ No Options¹
☐ EM - Emergency Battery Pack²
☐ DC - Dual Circuit³
☐ EC - Emergency Circuit
☐ DR - Damp Rated
☐ CB - Casambi Bluetooth(TW, RGBW)⁴
☐ DMX - DMX (RGBW)
☐ JD - JDRF Autonomy Sensor (DA4)⁴
☐ DOS - Daylight & Occupancy Sensor (DLA)⁴
☐ AWN - Athena Wireless Node (DLA)⁴

1. Leave empty.
 2. Battery Pack per 4 ft section.
 3. Control Downlight/Uplight separately.
 4. Available in sizes 4 ft and up.

LUMEN OUTPUT W/ft:

Watts	30K	35K	40K
5 W	515 lm	525 lm	535 lm
7 W	720 lm	735 lm	750 lm
10 W	1030 lm	1050 lm	1080 lm




Declare

Project:

Type:

SIZE:

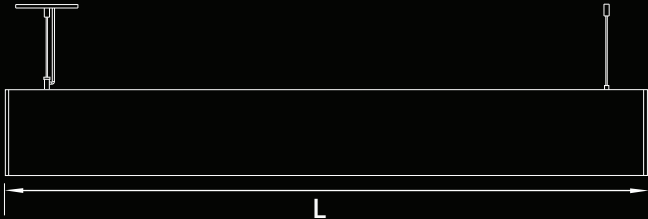




Size	L (Total Length)
1 ft	11.72 in
2 ft	24.47 in
3 ft	35.47 in
4 ft	48.22 in
5 ft	59.22 in
6 ft	71.97 in
7 ft	82.97 in
8 ft	95.72 in

Total length with endcaps


CONTINUOUS RUN:



RADIANCE:




MOUNTING:

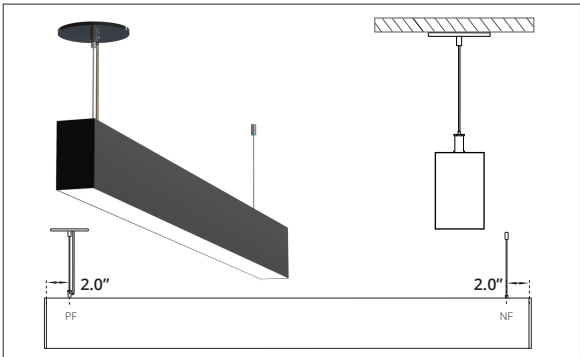

SUSPENDED

PF - Power Feed

NF - Non Power Feed

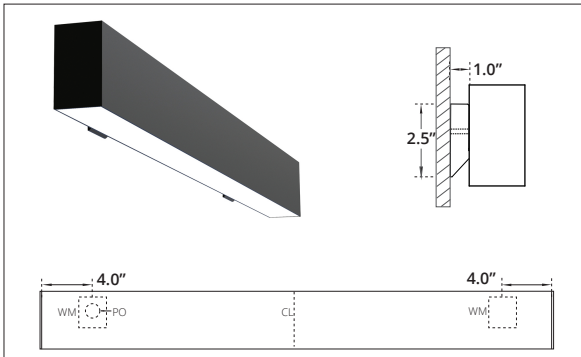


WALL MOUNT

PO - Power Opening

WM - Wall Mount Bracket


1-3 ft, single Wall Mount Bracket with Power Opening in the centre.

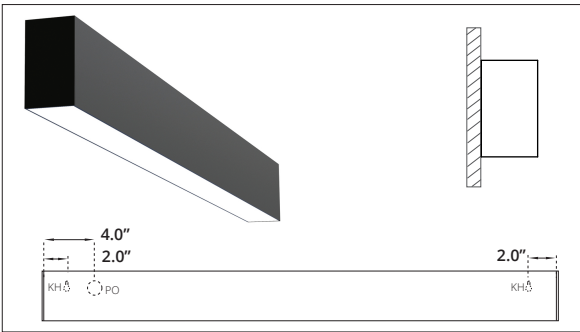

WALL FLUSH

KH - Key Hole

PO - Power Opening

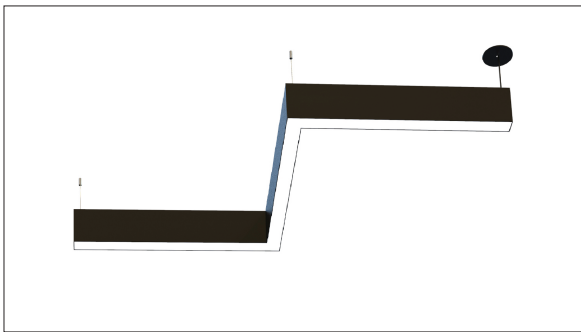

VARIABLE ANGLE

60°, 90°, 120°, 135° or Custom.