



### **FEATURES:**

- Architectural luminaire with direct/indirect light distribution.
- Light source: LED Boards (5.5"/11"/22").
- Luminaire shade combines polyester fabric fused to an acrylic sheet creating a soft and diffused illumination with built-in-driver.
- Double laminated finish includes 2nd outer layer of clear acrylic for improved wipe-down and reduced dirt accumulation.
- Suitable for surface-mounted or suspended installations.
- Proven record in hospitality, long term facilities and healthcare projects.
- LED Boards are rated for 60,000hrs. L80 with +90 CRI.
- Custom modifications are available.
- ED luminaires are certified to CSA and UL Standards.

reinventlight

## **SPECIFICATION:**

ED MAR+	SIZE	SOURCE	RADIANCE	VOLTAGE	DRIVER	MOUNTING	LENS	FINISH	CCT	OPTIONS
				Enter the Produ	ct Code into the bo	es above.				

SIZE

2 ft

**SOURCE** 

LENS

OP - Opal

25 W 50 W **RADIANCE** 

DI - Direct/Indirect<sup>1</sup>

1. 85% Down/15% Side

**VOLTAGE** 

UNV - 120/277V

347V 1

1. Verify availability.

2. Functionality and controls may be limited.

**DRIVER** 

ST - On/Off

DL - 0-10V Dim (1%)

DA4 - DALI D4i

Specify dimming protocol.

# MOUNTING

C4B - 4 ft Canopy BK<sup>1</sup>

C4W - 4 ft Canopy WH<sup>1</sup> T ft 2

\_\_\_ C \_\_\_ S4B - 4 ft Cord BK<sup>1</sup>

S4W - 4 ft Cord WH

ft<sup>2</sup>

R4B - Stem 4 ft BK 1

R4W - Stem 4 ft WH1

R ft<sup>2</sup>

SF - Surface Mount

1. Canopy match the Cord color. 2. Specify Suspension length and color.

# **FINISH**

☐ WH - White Linen <sup>1</sup>

☐ BK - Black Linen <sup>2</sup>

GR - Grey Linen<sup>1</sup>

CL- Chocolate Linen<sup>2</sup>

☐ JT - Jute 1

1. White Top Plate & Power Cord 2. Black Top Plate & Power Cord

#### CCT

30K - 3000 Kelvin/90CRI

35K - 3500 Kelvin/90CRI

40K - 4000 Kelvin/90CRI

RGBW<sup>1</sup>

☐ TW - Tunable White (27K-65K)<sup>2</sup>

1. Available with DMX or CB. 2. Available with DL2, DA4 or CB.

Specify required CCT.

## **OPTIONS**

☐ No Options¹

☐ DL - Double Lamination<sup>2</sup>

BIOS

CB - Casambi Bluetooth(DL)

DMX - DMX (RGBW)

Leave empty.
Anti-Microbial Finish

# **LUMEN OUTPUT:**

Watts	30K	35K	40K
25 W	2610 lm	2650 lm	2690 lm
50 W	5150 lm	5250 lm	5380 lm











Project: Type:



905-830-0339 / 1-800-667-9281




info@edisonlighting.ca



www.edisonlighting.ca



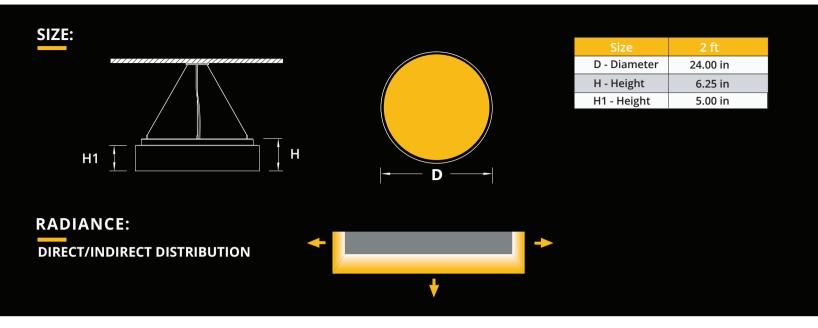

# **MOUNTING:**



### **SHADE FINISHES:**

