



## **FEATURES**:

- Architectural luminaire with direct distribution.
- Light source: LED Tape.
- Diffused illumination is provided by high efficiency frosted opal lens.
- Sleek body of luminaire is made from curved aluminum profile.
- Extruded aluminum body comes with black or white finish.
- Remote driver enclosure can be surface mounted or installed in a ceiling cavity. Standard enclosure size: 1.60"H x 3.75"W x 18.5"L.
- LED tape is rated for 60,000hrs. L80 with 90CRI.
- Has a proven record in office, commercial and retail installations.
- Custom modifications are available.
- ED luminaires are certified to CSA and UL Standards.

					reinventlight
SPECIFICA	ATION:				
ED ORBIT+	TYPE	SIZE SOURCE	RADIANCE VOLTAGE DRIVER  — Enter the Product Code into the boxes above.	MOUNTING LENS —	FINISH CCT OPTIONS
<b>TYPE</b> ☐ S - Shape	SIZE  3 Feet 4 Feet 6 Feet 8 Feet	SOURCE  5W/FT LED 7W/FT LED 10W/FT LED	RADIANCE  DD - Direct (100% Downward) SD - Side Distribution (100% Sideways) *Light Distribution.	VOLTAGE  120V 277V 347V* *Not available for all configurations.	DRIVER  ST - Standard (Non-Dimming) DL - 0-10V Dimming (1%) DA - DALI WZ - Wiz**  * Please specify dimming method (ELV). **Remote driver only.

# MOUNTING

- S4-Suspension 4Feet\*\*
- S6-Suspension 6Feet\*\*
- S Feet\*

#### LENS

OP - Opal

# FINISH

- BK Black
- WH White
- CF Custom RAL#

## CCT

- 30K/90CRI 3000Kelvin
- 35K/90CRI 3500Kelvin
- 40K/90CRI 4000Kelvin
- RGBW
- \*Other options are available.

### **OPTIONS**

CB - Casambi BT

#### **LUMEN OUTPUT W/FT:**

Watts	30K	35K	40K
5W	440 lm	450 lm	460 lm
7W	618 lm	630 lm	642 lm
10W	882 lm	900 lm	918 lm









Project: Type:

**\** 905-830-0339 / 1-800-667-9281




info@edisonlighting.ca




www.edisonlighting.ca


<sup>\*</sup>Please specify required Length.
\*\*Remote Driver.



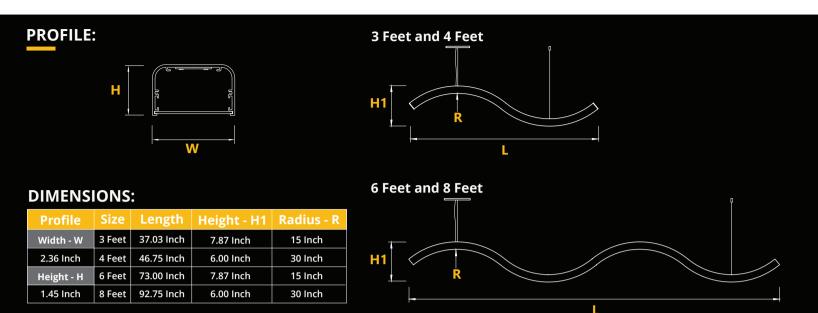

## **SIZES AND CONFIGURATIONS:**

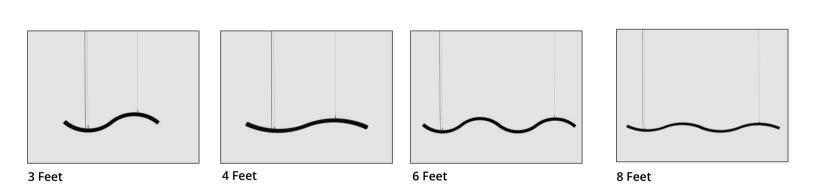

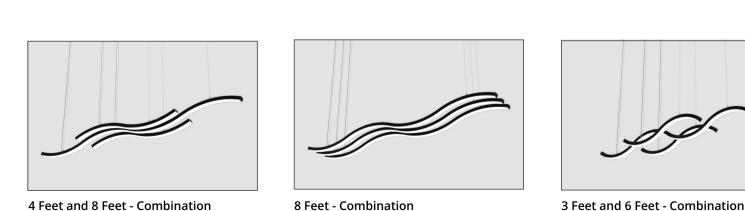

**9**05-830-0339 / 1-800-667-9281

