

### FEATURES:

- ✓ Architectural curved system with direct or direct/indirect distribution.
- ✓ Light source: LED boards.
- ✓ Diffused illumination is provided by a high efficiency frosted opal lens or by an optional prismatic optic.
- ✓ Sleek body of the luminaire is made from an aluminum profile curved to desire shape.
- ✓ Suitable for suspended or surface mounted installations.
- ✓ Extruded aluminum body comes with a black or white finish.
- ✓ Available with custom color options or unique shape configurations.
- ✓ LED strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

### SPECIFICATION:

**ED CURVES+**  -  -  -  -  -  -  -  -  -  -  -

Enter the Product Code into the boxes above.

#### SHAPE

- ☐ CR - Curve  
☐ OV - Oval  
☐ SQ - Square  
☐ RC - Rectangle  
☐ CS - Custom Shape

\* Please specify Custom Shape.

#### SIZE

☐ \_\_\_\_\_ Linear Ft\*

\* Provide drawing (pdf or dwg).

#### SOURCE

- ☐ 5W/Ft  
☐ 7W/Ft  
☐ 10W/Ft\*

\* UD lighting distribution only.

#### RADIANCE

- ☐ DD - Direct (100%Down)  
☐ UD - Uneven(70%Down/30%Up)\*\*

\*Light Distribution.

\*\*Suspended Configuration only.

#### VOLTAGE

- ☐ UNV - 120/277V  
☐ 347V\*

\*Not available for all configurations.

#### DRIVER

- ☐ ST - On/Off  
☐ DL - 0-10V Dim (1%)  
☐ DLO - 0-10V Dim (to Off)  
☐ DA4 - DALI D4i  
☐

\* Please specify dimming method.

#### MOUNTING

- ☐ S6W - 6Ft Cord WH\*  
☐ S6B - 6Ft Cord BK\*  
☐ S  Feet\*\*  
☐ SF - Surface Mount

\*Canopy will match the Cord color.

\*\*Specify Suspension length and color.

#### LENS

- ☐ OP - Opal  
☐ PR - Prismatic

#### FINISH

- ☐ BK - Black\*  
☐ WH - White\*\*  
☐ CF/RAL

\*RAL 9005

\*\*RAL 9016

\*\*\*Specify required RAL number.

#### CCT

- ☐ 30K - 3000 Kelvin/90CRI  
☐ 35K - 3500 Kelvin/90CRI  
☐ 40K - 4000 Kelvin/90CRI

\*Other options are available.

#### OPTIONS

- ☐ No Options\*  
☐ DC - Dual Circuit\*\*

\*Leave Empty.

\*\*Down /Up Control separately.

### LUMEN OUTPUT W/Ft:


Watts	30K	35K	40K
5W	515 lm	525 lm	535 lm
7W	720 lm	735 lm	750 lm
10W	1030lm	1050 lm	1080 lm




Project:

Type:


SIZE:

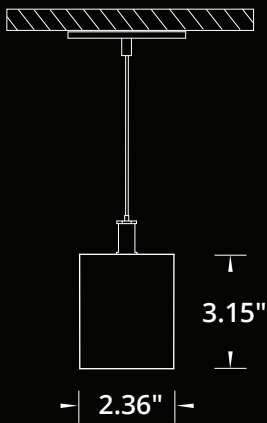


MINIMUM RADIUS:



RADIANCE:




Direct Distribution



Uneven Distribution

SHAPES:

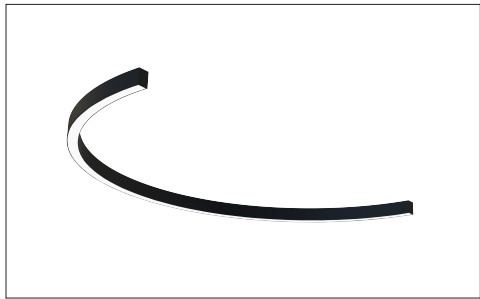


CURVE



OVAL



SQUARE

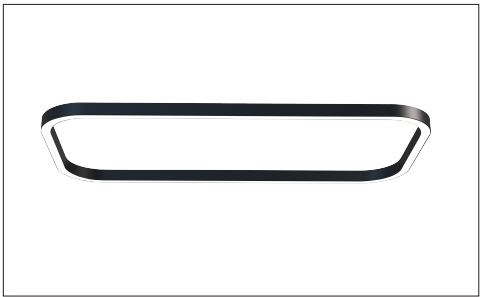

RECTANGLE



CUSTOM SHAPE



CUSTOM SHAPE