



FEATURES:

- ✓ Architectural luminaire with direct-indirect distribution.
- ✓ Light source: LED Tape.
- ✓ Diffused illumination is provided by high efficiency frosted opal lens.
- ✓ Sleek body of the luminaire is made from curved aluminum profile.
- ✓ Suitable for suspended and surface mounted installations.
- ✓ Extruded aluminum body comes with a black or white finish.
- ✓ Remote driver is mounted in round ceiling canopy or optional rectangle enclosure.
- ✓ LED tape is rated for 50,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

SPECIFICATION:

ED ORBIT+

SIZE	SOURCE	RADIANCE	VOLTAGE	DRIVER	MOUNTING	LENS	FINISH	CCT	OPTIONS

Enter the Product Code into the boxes above.

SIZE

- ☐ 2 ft
☐ 3 ft
☐ 4 ft
☐

Specify required size.

SOURCE

- ☐ 25 W
☐ 50 W
☐ 75 W¹

1. Available for 4 ft.
 2. Other Wattages are available.

RADIANCE

- ☐ IL - Inner Lit¹
☐ OL - Outer Lit²

1. 100% Inward
 2. 100% Outward

VOLTAGE

- ☐ UNV - 120/277V
☐ 347V¹

1. Verify availability.

DRIVER

- ☐ ST - On/Off
☐ DL - 0-10V Dim (1%)
☐ DLO - 0-10V Dim (to Off)
☐ DL2 - 0-10V Dim (TW)
☐ DLA - 0-10V Dim (Aux)
☐ DA4 - DALI D4i
☐ CV - Constant Voltage (RGBW)
☐

Specify dimming protocol.

MOUNTING

- ☐ C4-Canopy 4 ft¹
☐ C6-Canopy 6 ft¹
☐ C ft²
☐ D4-Drop 4 ft
☐ D6-Drop 6 ft
☐ D ft²
☐ S4-Suspension 4 ft
☐ S6-Suspension 6 ft
☐ S ft²
☐ SF - Surface Mount

1 Canopy installation is not available for custom sizes.
 2 Please specify required length.
 3 Remote Driver only.

LENS

- ☐ OP - Opal

FINISH

- ☐ BK - Black¹
☐ WH - White²
☐ CF/RAL

1. RAL 9005
 2. RAL 9016
 Specify required RAL number.

CCT

- ☐ 30K - 3000 Kelvin/90CRI
☐ 35K - 3500 Kelvin/90CRI
☐ 40K - 4000 Kelvin/90CRI
☐ RGBW¹
☐ TW - Tunable White (27K-65K)²
☐

1. Available with DMX or CB.
 2. Available with DL2, DA4 or CB.
 Specify required CCT.

OPTIONS

- ☐ No Options¹
☐ EC - Emergency Circuit
☐ CB - Casambi Bluetooth(TW, RGBW)
☐ DMX - DMX (RGBW)
☐ AWN - Athena Wireless Node (DLA)

1. Leave empty.

LUMEN OUTPUT:


Watts	30K	35K	40K
25 W	2205 lm	2250 lm	2295 lm
50 W	4410 lm	4500 lm	4590 lm
75 W	6610 lm	6750 lm	6890 lm



Project:



Type:

SIZE:

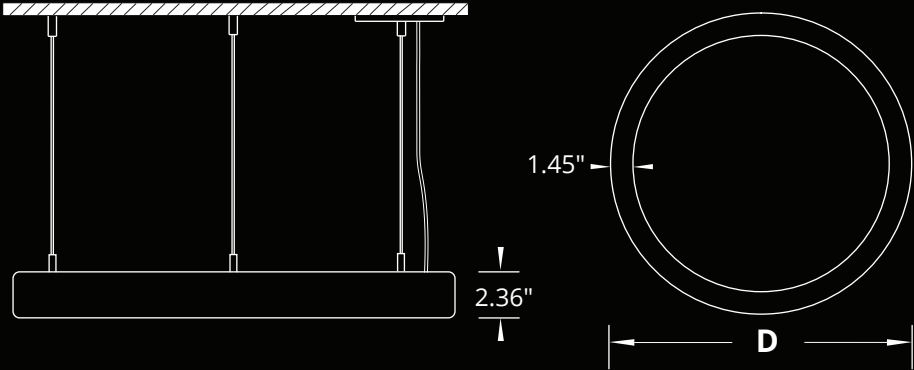


Diameter		
Size	Outer Lit	Inner Lit
2 ft	27.952 in	25.196 in
3 ft	34.250 in	37.795 in
4 ft	46.456 in	44.094 in

RADIANCE:

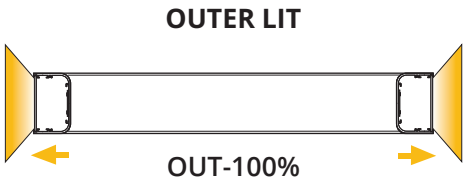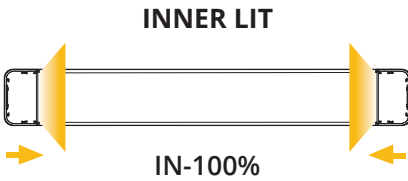

MOUNTING:

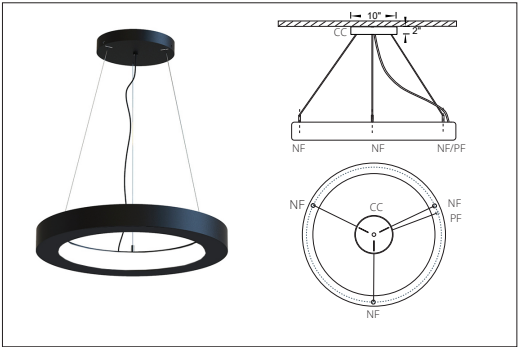


SUSPENDED - CEILING CANOPY

CC - Ceiling Canopy - Available for 2-3-4 ft sizes

PF - Power Feed

NF - Non Power Feed

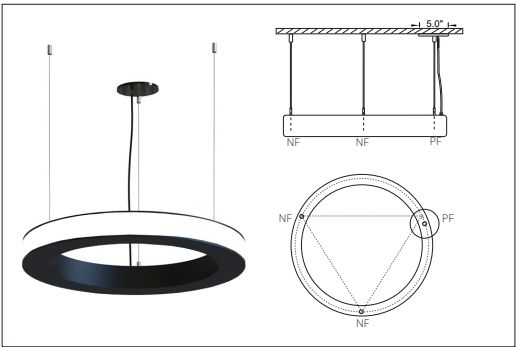


SUSPENDED - STRAIGHT WIRE¹

PF - Power Feed

NF - Non Power Feed

1. Remote Driver.

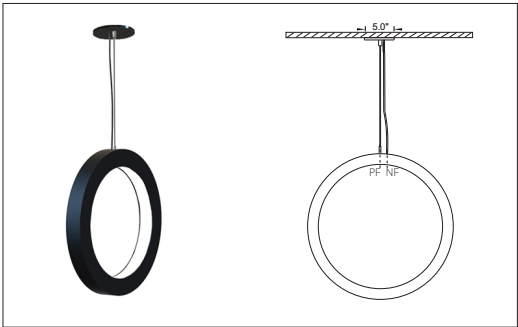


DROP SUSPENSION¹

PF - Power Feed

NF - Non Power Feed

1. Remote Driver.

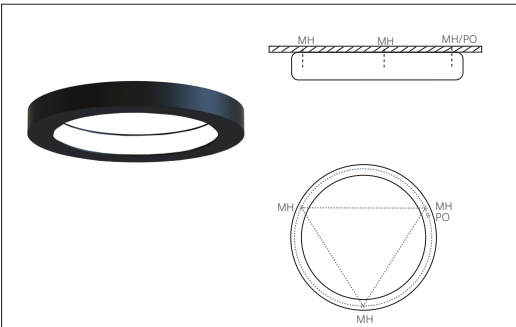

SURFACE MOUNT¹

PO - Power Opening

MH - Mounting Hole

1. Remote Driver.