

FEATURES:

- ✓ Architectural luminaire with direct lighting distribution.
- ✓ Light source: COB LED.
- ✓ High efficiency low glare integral reflector comes in the following beam angles: Narrow 15°, Medium Flood 35° and Flood 55°.
- ✓ Adjustable trim assembly can be tilted up to 30° for wall wash applications.
- ✓ Available with an optional flat frame plate for NC installations.
- ✓ Suitable for recessed insulated ceilings or damp locations.
- ✓ LED spot is rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

SPECIFICATION:

ED SD+ - - - - - - - - - -

Enter the Product Code into the boxes above.

SIZE

 2x - Double

SOURCE

 15 W
 20 W

RADIANCE

 DD - Direct

VOLTAGE

 UNV - 120/277V
 347V¹

1. Verify availability.

DRIVER

 ST - On/Off
 DL - 0-10V Dim (1%)

Specify required dimming method.

MOUNTING

 RT - Retrofit
 NC- New Const. Plate

BEAM

 BN - Narrow 15°
 BM - Medium 35°
 BF - Flood 55°

REFLECTOR

 MW - Matte White
 MB - Matte Black
 MS - Matte Silver

TRIM

 BK - Black¹
 WH - White²
 1. RAL 9005
 2. RAL 9003


CCT

 30K - 3000 Kelvin/90CRI
 35K - 3500 Kelvin/90CRI
 40K - 4000 Kelvin/90CRI

Specify required CCT.

DIMENSIONS:

Size	Height	Width
Double	4.88 in	4.13 in
Length	Cut Out	
7.69 in	7.48 in x 3.82 in	

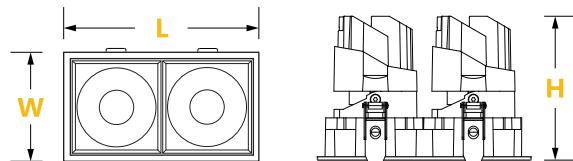

LUMEN OUTPUT:

Watts	30K	35K	40K
15 W	1425 lm	1455 lm	1485 lm
20 W	1900 lm	1940 lm	1980 lm


Project:
Type:

905-830-0339 / 1-800-667-9281

info@edisonlighting.ca

www.edisonlighting.ca