


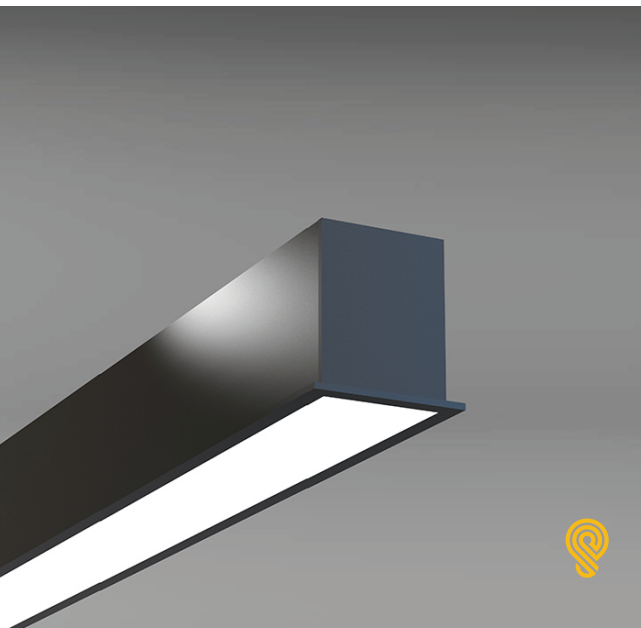

### FEATURES:

- ✓ Architectural linear luminaire with direct distribution.
- ✓ Light source: LED board or LED strip.
- ✓ Even illumination is provided by a high efficiency opal lens.
- ✓ Available for row-mounted installations in various lengths.
- ✓ Suitable for recessed applications in drywall or T-Bar ceilings.
- ✓ Extruded aluminum body comes with a standard black or white finish.
- ✓ Also available with various custom color options.
- ✓ LED strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

### SPECIFICATION:

ED VECTOR1+  —  —  —  —  —  —  —  —  —  —

Enter the Product Code into the boxes above.

#### SIZE

\_\_\_\_\_ ft  
1-8 ft  
Continuous Run  
(0.5 ft Increments)

#### SOURCE

- ☐ 5 W/ft  
☐ 7 W/ft  
☐ 10 W/ft

#### RADIANCE

- ☐ DD - Direct

#### VOLTAGE

- ☐ UNV - 120/277V  
☐ 347V<sup>1</sup>  
1. Verify availability.

#### DRIVER

- ☐ ST - On/Off  
☐ DL - 0-10V Dim (1%)  
☐ DLO - 0-10V Dim (to Off)  
☐ DL2 - 0-10V Dim (TW)  
☐ DLA - 0-10V Dim (Aux)  
☐ DA4 - DALI D4i  
☐ CV - Constant Voltage (RGBW)  
☐   
Specify dimming protocol.

#### MOUNTING

- ☐ RS - Recessed  
☐ RB - Recessed T-Bar

#### LENS

- ☐ OP - Opal

#### FINISH

- ☐ BK - Black<sup>1</sup>  
☐ WH - White<sup>2</sup>  
☐ CF/RAL   
1. RAL 9005  
2. RAL 9016  
Specify required RAL number.

#### CCT

- ☐ 30K - 3000 Kelvin/90CRI  
☐ 35K - 3500 Kelvin/90CRI  
☐ 40K - 4000 Kelvin/90CRI  
☐ RGBW<sup>1</sup>  
☐ TW - Tunable White (27K-65K)<sup>2</sup>  
☐   
1. Available with DMX or CB.  
2. Available with DL2, DA4 or CB.  
Specify required CCT.

#### OPTIONS

- ☐ No Options<sup>1</sup>  
☐ EM - Emergency Battery Pack<sup>2</sup>  
☐ EC - Emergency Circuit  
☐ DR - Damp Rated  
☐ CB - Casambi Bluetooth(TW, RGBW)<sup>3</sup>  
☐ DMX - DMX (RGBW)  
☐ JD - JDRF Autonomy Sensor (DA4)<sup>3</sup>  
☐ DOS - Daylight & Occupancy Sensor (DLA)<sup>3</sup>  
☐ AWN - Athena Wireless Node (DLA)<sup>3</sup>  
1. Leave empty.  
2. Battery Pack per 4 ft section.  
3. Available in sizes 4 ft and up.

### LUMEN OUTPUT W/ft:

| Watts | 30K     | 35K     | 40K     |
|-------|---------|---------|---------|
| 5 W   | 515 lm  | 525 lm  | 535 lm  |
| 7 W   | 720 lm  | 735 lm  | 750 lm  |
| 10 W  | 1030 lm | 1050 lm | 1080 lm |



Declare.


Project:

Type:

SIZE:




CONTINUOUS RUN:




1. L-Total length for Drywall ceiling.  
2. L1- Total length for T-Bar ceiling.

RADIANCE:




MOUNTING:

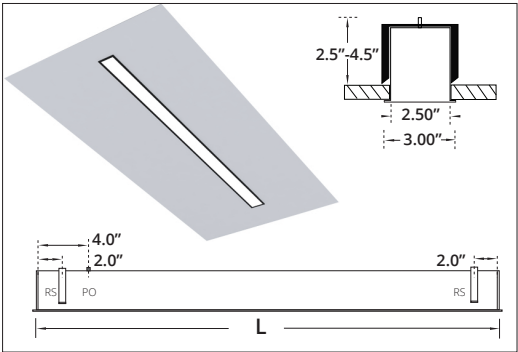

**RECESSED**  
RS - Recessed Bracket  
PO - Power Opening  
Cutout Dimensions = Total Length x Width of Extrusion.

| Size | L (Drywall Ceiling) |
|------|---------------------|
| 1 ft | 11.34 in            |
| 2 ft | 22.34 in            |
| 3 ft | 33.34 in            |
| 4 ft | 48.22 in            |
| 5 ft | 59.22 in            |
| 6 ft | 71.97 in            |
| 7 ft | 82.97 in            |
| 8 ft | 95.72 in            |

1. L is Total length with endcaps for Drywall Ceiling.  
2. Cutout Dimensions = Total Length x Width of Extrusion.

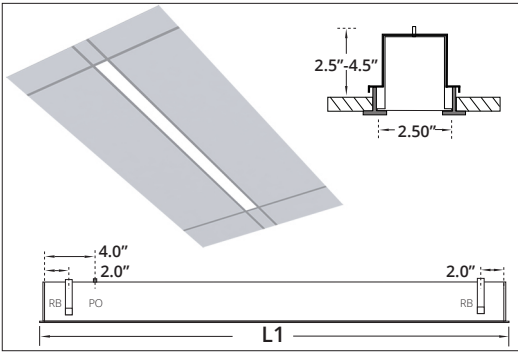

**RECESSED T-BAR**  
RB - Recessed T-Bar Bracket  
PO - Power Opening

| Size | L1 (T-Bar Ceiling) |
|------|--------------------|
| 1 ft | 11.75 in           |
| 2 ft | 23.75 in           |
| 3 ft | 35.75 in           |
| 4 ft | 47.75 in           |
| 5 ft | 59.75 in           |
| 6 ft | 71.75 in           |
| 7 ft | 83.75 in           |
| 8 ft | 95.75 in           |

L1 is Total length with endcaps for T-Bar Ceiling.