

FEATURES:

- ✓ Architectural luminaire with direct distribution.
- ✓ Light source: LED Tape.
- ✓ Diffused illumination is provided by high efficiency frosted opal lens.
- ✓ Sleek body of luminaire is made from curved aluminum profile.
- ✓ Extruded aluminum body comes with a black or white finish.
- ✓ Remote driver enclosure can be surface mounted or installed in a ceiling cavity. Standard enclosure size: 1.60"H x 3.75"W x 18.5"L.
- ✓ LED tape is rated for 60,000 hrs. L80 with 90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

SPECIFICATION:

ED ORBIT+ — — — — — — — — — — —

Enter the Product Code into the boxes above.

TYPE

- ☐ S - Shape

SIZE

- ☐ 3ft
☐ 4ft
☐ 6ft
☐ 8ft

SOURCE

- ☐ 5W/ft
☐ 7W/ft
☐ 10W/ft

RADIANCE

- ☐ DD - Direct ¹
☐ SD - Side Distribution ²
1. 100% Downward
2. 100% Sideways

VOLTAGE

- ☐ UNV - 120/277V
☐ 347V ¹
1. Verify availability.

DRIVER

- ☐ ST - On/Off
☐ DL - 0-10V Dim (1%)
☐ DLO - 0-10V Dim (to Off)
☐ DL2 - 0-10V Dim (TW)
☐ DLA - 0-10V Dim (Aux)
☐ DA4 - DALI D4i
☐ CV - Constant Voltage (RGBW)
☐
Specify dimming protocol.

MOUNTING

- ☐ S6B - 6ft Cord BK ¹
☐ S6W - 6ft Cord WH ¹
☐ S ft ²
1. Canopy will match the Cord color.
2. Specify Suspension length and color.

LENS

- ☐ OP - Opal

FINISH

- ☐ BK - Black¹
☐ WH - White²
☐ CF/RAL
1. RAL 9005
2. RAL 9003
Specify required RAL number.

CCT

- ☐ 30K - 3000 Kelvin/90CRI
☐ 35K - 3500 Kelvin/90CRI
☐ 40K - 4000 Kelvin/90CRI
☐ RGBW ¹
☐ TW - Tunable White (27K-65K)²
☐
1. Available with DMX or CB.
2. Available with DL2, DA4 or CB.
Specify required CCT.

OPTIONS

- ☐ No Options¹
☐ EC - Emergency Circuit
☐ CB - Casambi Bluetooth(TW, RGBW)
☐ DMX - DMX (RGBW)
☐ AWN - Athena Wireless Node (DLA)
1. Leave empty.

LUMEN OUTPUT W/ft:

Watts	30K	35K	40K
5W	440lm	450lm	460lm
7W	618lm	630lm	642lm
10W	882lm	900lm	918lm



Declare.


Project:

Type:


SIZE:

Profile	Size	Length	Height - H1	Radius - R
Width - W	3ft	37.03in	7.87in	15in
2.36in	4ft	46.75in	6.00in	30in
Height - H	6ft	73.00in	7.87in	15in
1.45in	8ft	92.75in	6.00in	30in
Size	S1 - Suspension 1	S2 - Suspension 2		
3ft	9.52in	18.00in		
4ft	11.86in	23.00in		
6ft	9.52in	53.00in		
8ft	11.86in	69.02in		


3ft and 4ft

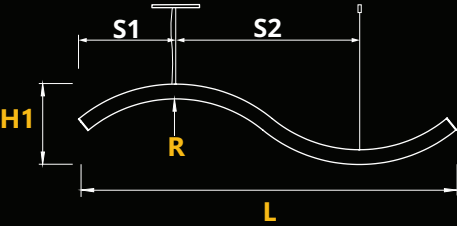


PROFILE:




6ft and 8ft

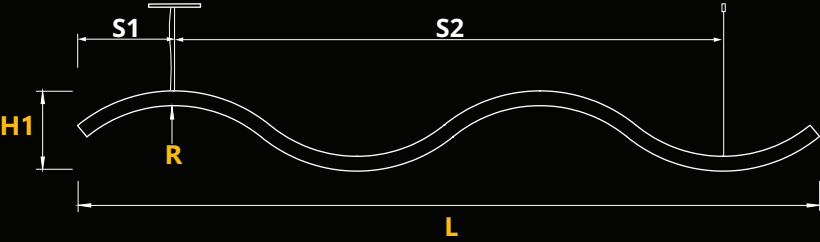


SIZES AND CONFIGURATIONS:




3ft




4ft




6ft




8ft

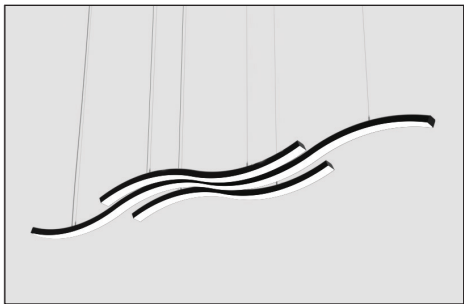

4ft and 8ft - Combination

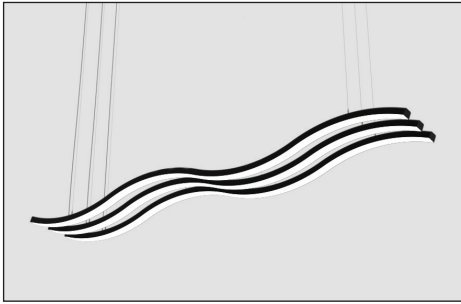

8ft - Combination

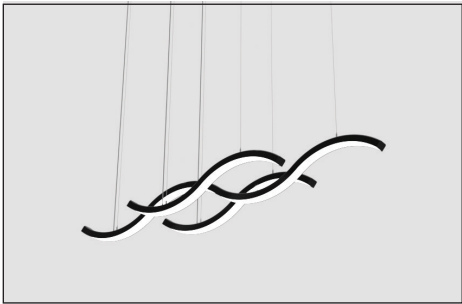

3ft and 6ft - Combination