

## FEATURES:

- ✓ Architectural linear luminaire with direct or direct/Indirect distribution.
- ✓ Light source: 11" LED modular board.
- ✓ Dark Optic provides superior lighting distribution with precise low-glare illumination.
- ✓ Offered with a Flood 50°/10UGR, Wide 80°/15UGR or Asymmetric beam angle.
- ✓ Available for row-mounted installations in various lengths.
- ✓ Suitable for surface, suspended, recessed and wall mount installations.
- ✓ Extruded aluminum body comes with a black or white finish.
- ✓ Also available with custom color options.
- ✓ LEDs are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

**reinventlight**

## SPECIFICATION:

**ED VECTOR+**  —  —  —  —  —  —  —  —  —  —  —

Enter the Product Code into the boxes above.

### TYPE

- ☐ DO - Dark Optic

### SIZE

\_\_\_\_\_ Feet\*  
 \*1-8 Feet Continuous Run.

### SOURCE

- ☐ 5W/FT LED  
☐ 7W/FT LED  
☐ 10W/FT LED

### RADIANCE

- ☐ DD - Direct (100%Down)  
☐ UD - Uneven (70%Down/30%Up)\*\*  
 \*Light distribution.  
 \*\*Available for Suspended/Wall Mount configurations only.

### VOLTAGE

- ☐ 120V  
☐ 277V  
☐ 347V\*  
 \*Not available for all configurations.

### DRIVER

- ☐ ST - On/Off  
☐ DL - 0-10V Dimming (1%)  
☐ DLO - 0-10V Dimming (to Off)  
☐ DA4 - DALI D4i  
☐ EM - Emergency Driver\*  
☐  \*\*  
 \*Battery Pack min. 4Feet section.  
 \*\*Specify dimming protocol.

### MOUNTING

- ☐ S6W - 6Ft Cord WH\*  
☐ S6B - 6Ft Cord BK\*  
☐ S  Feet\*\*  
☐ WM - Wall Mount  
☐ WF - Wall Flush  
☐ SF - Surface Mount  
☐ RT - Recessed Trimless

\*Canopy will match the Cord color.  
 \*\*Specify Suspension length and color.

### BEAM

- ☐ BF - Flood 50°  
☐ BW - Wide 80°  
☐ BA - Asymmetric

### REFLECTOR

- ☐ SB - Black  
☐ SW - White  
☐ SR - Red  
☐ SL - Silver  
☐ SG - Gold  
☐ SM - Gunmetal

### FINISH

- ☐ BK - Black\*  
☐ WH - White\*\*  
☐ CF/RAL  \*\*\*  
 \*RAL 9005  
 \*\*RAL 9016  
 \*\*\*Specify required RAL number.

### CCT

- ☐ 30K/90CRI - 3000 Kelvin  
☐ 35K/90CRI - 3500 Kelvin  
☐ 40K/90CRI - 4000 Kelvin  
☐  \*  
 \*Specify required CCT.

### OPTIONS

- ☐ No Options\*  
☐ DC - Dual Circuit\*\*  
☐ CB - Casambi/Bluetooth  
☐  \*\*\*  
 \*Leave empty.  
 \*\*Control Downlight/Uplight separately.  
 \*\*\*Specify required option.

## LUMEN OUTPUT W/Ft:


Watts	30K	35K	40K
5W	610 lm	625 lm	640 lm
7W	855 lm	875 lm	895 lm
10W	1225lm	1250 lm	1275 lm


**Declare.**

Project:

Type:

### SIZE:

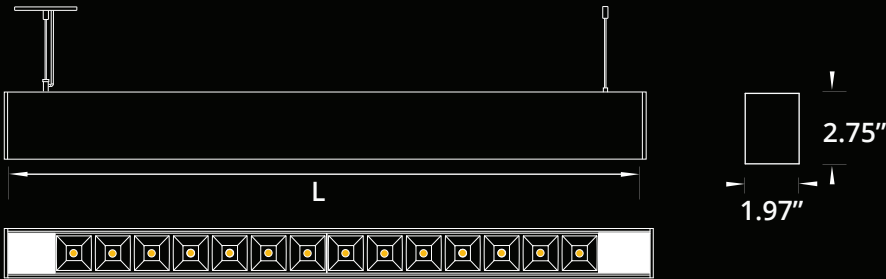

Size	L (Extrusion Length)
1 Feet	11.12 Inch
2 Feet	22.12 Inch
3 Feet	33.12 Inch
4 Feet	48.00 Inch
5 Feet	59.00 Inch
6 Feet	71.75 Inch
7 Feet	82.75 Inch
8 Feet	95.50 Inch

Total length with endcaps = L + 0.22"

\*Extrusion length included filler plate.

\*\*1-3 Feet, no filler plate requires.




\*\*\*4-8 Feet, filler plates at the end.

\*\*\*\*Continuous Run, filler plates in between & at the end.


### CONTINUOUS RUN:



### BEAM/RADIANCE:




### MOUNTING:

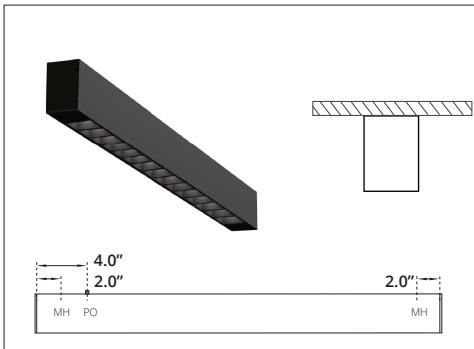

#### SURFACE MOUNT

MH - Mounting Hole


PO - Power Opening

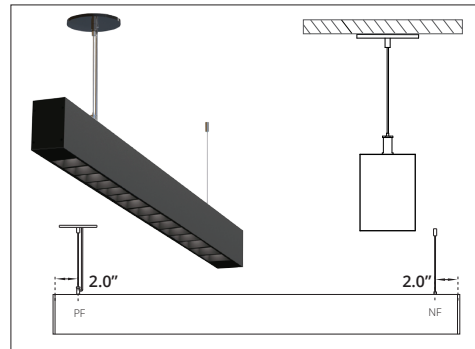

#### SUSPENDED

PF - Power Feed

NF - Non Power Feed

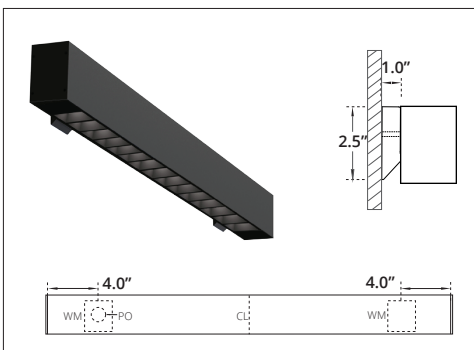


#### WALL MOUNT

PO - Power Opening

WM - Wall Mount Bracket

\*1-3 Feet, single Wall Mount Bracket with Power Opening in the centre.

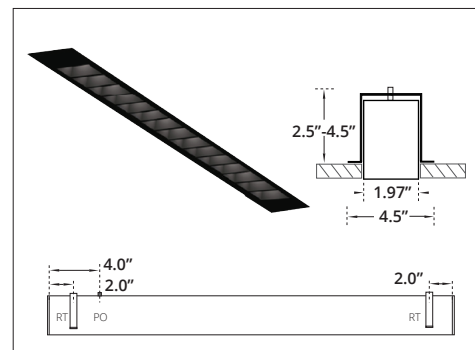

#### RECESSED TRIMLESS

RT - Recessed Trimless Bracket

PO - Power Opening

\*Cutout Dimensions = Total Length x Width of Extrusion.

### REFLECTORS:

#### SQUARE



#### WHITE



#### SILVER



#### BLACK



#### GOLD



#### RED



#### GUNMETAL