

FEATURES:

- ✓ Architectural acoustic luminaire with direct/indirect lighting distribution.
- ✓ Made from recyclable plastic material available in different thicknesses.
- ✓ Class1 Fire rated with 0.7 Noise Reduction Coefficient / 1" Acoustic.
- ✓ Light source: LED boards.
- ✓ Diffused illumination is provided by a frosted opal lens.
- ✓ Extruded aluminum body comes with a built-in-driver and available in a black or white finish.
- ✓ LED strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

SPECIFICATION:

Sonic VECTOR+ - - - - - - - - - - - -

Enter the Product Code into the boxes above

<p>TYPE</p> <ul style="list-style-type: none"> <input type="checkbox"/> FR - Flush Regular <input type="checkbox"/> FV - Flush V-Cut <input type="checkbox"/> FS - Square Edge <input type="checkbox"/> FC - Curved Edge 	<p>HEIGHT</p> <ul style="list-style-type: none"> <input type="checkbox"/> 12 in <input type="checkbox"/> 16 in <input type="checkbox"/> 24 in 	<p>SIZE</p> <ul style="list-style-type: none"> <input type="checkbox"/> 4 ft <input type="checkbox"/> 6 ft <input type="checkbox"/> 8 ft <input type="checkbox"/> <input type="text"/> <p>Specify custom size.</p>	<p>SOURCE</p> <ul style="list-style-type: none"> <input type="checkbox"/> 5 W/ft <input type="checkbox"/> 7 W/ft <input type="checkbox"/> 10 W/ft 	<p>RADIANCE</p> <ul style="list-style-type: none"> <input type="checkbox"/> DD - Direct¹ <input type="checkbox"/> ID - Indirect² <input type="checkbox"/> UD - Uneven³ <p>1. 100%Down 2. 100%Up 3. 70%Down/30%Up</p>	<p>VOLTAGE</p> <ul style="list-style-type: none"> <input type="checkbox"/> UNV - 120/277V <input type="checkbox"/> 347V¹ <p>1. Verify availability.</p>
<p>DRIVER</p> <ul style="list-style-type: none"> <input type="checkbox"/> ST - On/Off <input type="checkbox"/> DL - 0-10V Dim (1%) <input type="checkbox"/> DLO - 0-10V Dim (to Off) <input type="checkbox"/> DL2 - 0-10V Dim (TW) <input type="checkbox"/> CV - Constant Voltage (RGBW) <input type="checkbox"/> <input type="text"/> <p>Specify dimming protocol.</p>	<p>MOUNTING</p> <ul style="list-style-type: none"> <input type="checkbox"/> S6B - 6 ft Cord BK¹ <input type="checkbox"/> S6W - 6 ft Cord WH¹ <input type="checkbox"/> S <input type="text"/> ft² <p>1. Canopy match the Cord Color 2. Specify Suspension Length/color.</p>	<p>LENS</p> <ul style="list-style-type: none"> <input type="checkbox"/> OP - Opal 	<p>ED VECTOR+ FINISH</p> <ul style="list-style-type: none"> <input type="checkbox"/> BK - Black¹ <input type="checkbox"/> WH - White² <p>1. RAL 9005 2. RAL 9016</p>	<p>CCT</p> <ul style="list-style-type: none"> <input type="checkbox"/> 30K - 3000 Kelvin/90CRI <input type="checkbox"/> 35K - 3500 Kelvin/90CRI <input type="checkbox"/> 40K - 4000 Kelvin/90CRI <input type="checkbox"/> RGBW¹ <input type="checkbox"/> TW - Tunable White (27K-65K)² <input type="checkbox"/> <input type="text"/> <p>1. Available with CV. 2. Available with DL2. Specify required CCT.</p>	

ACOUSTIC FINISH

Specify additional color for Two-Tone, for example 04/11.

LUMEN OUTPUT W/ft:


Watts	30K	35K	40K
5 W	515 lm	525 lm	535 lm
7 W	720 lm	735 lm	750 lm
10 W	1030 lm	1050 lm	1080 lm



Project:




Type:

SIZE:



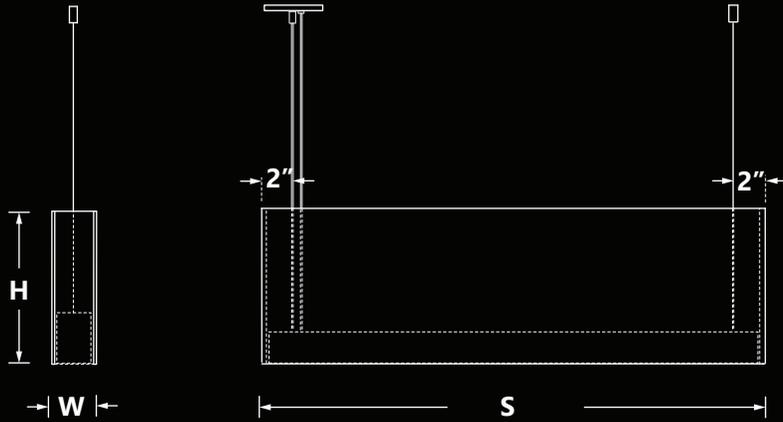


W-Width	3.00 in
H-Height	S-Size
12 in = 11.75 in	4 ft = 47.75 in
16 in = 15.75 in	6 ft = 71.75 in
24 in = 23.75 in	8 ft = 95.75 in

RADIANCE:

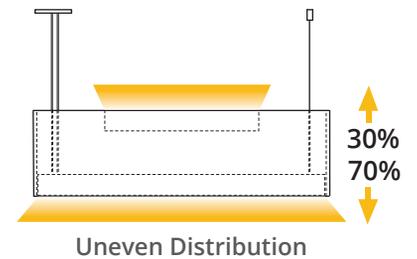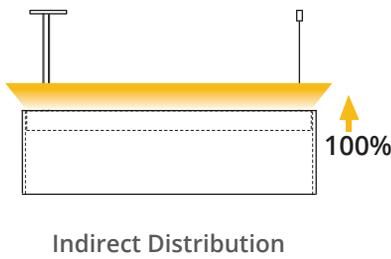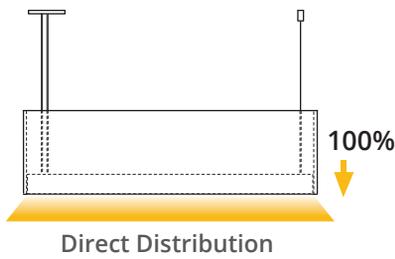

TYPE:

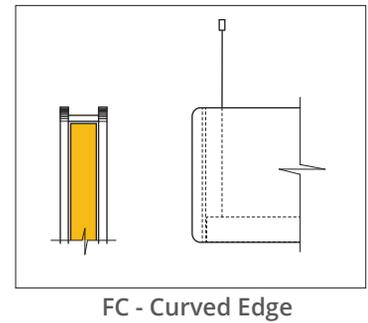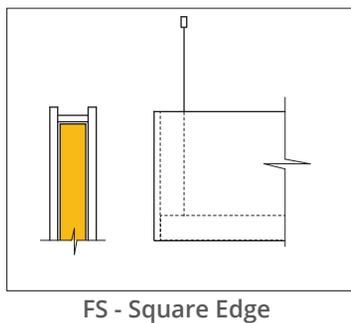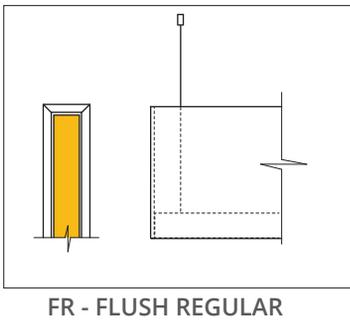

FR - Regular
04



FR - Two-Tone
04/11



FS - Square Edge
04/11



FC - Curved Edge
04/11