


FEATURES:

- ✓ Architectural sound absorbing Eco Felt Acoustic panel.
- ✓ Made from recyclable plastic material available in different thicknesses.
- ✓ Class1 Fire rated with 0.7 Noise Reduction Coefficient/1" Acoustic.
- ✓ Light source: COB LED.
- ✓ High efficiency integral reflector combined with opal lens insert provides excellent lighting distribution.
- ✓ Circular internal louver is available in a wide range of finishes.
- ✓ Aluminum body of the luminaire comes with built-in-driver.
- ✓ LED spot is rated for 60,000 hrs. L70 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight
SPECIFICATION:
Sonic TUBE+ - - - - - - - - - - -

Enter the Product Code into the boxes above.

TYPE
 CS - Cylinder

HEIGHT
 12 in
 16 in
 24 in

SOURCE
 15 W
 20 W
 25 W

RADIANCE
 DD - Direct

VOLTAGE
 UNV - 120/277V

DRIVER
 ST - On/Off
 DL - 0-10V Dim (1%)
 DA4 - DALI D4i

Specify dimming protocol.

MOUNTING
 S6B - 6 ft Cord BK¹
 S6W - 6 ft Cord WH¹
 S ft

¹ Canopy match the Cord color
 Specify Suspension length and color.

REFLECTOR
 BK - Black
 WH - White

ED TUBE+ FINISH
 BK - Black¹
 WH - White²
 1. RAL 9005
 2. RAL 9003

CCT
 30K - 3000 Kelvin/90CRI
 35K - 3500 Kelvin/90CRI
 40K - 4000 Kelvin/90CRI

Specify required CCT.

ACOUSTIC FINISH

Specify Top Layer & Base Layer, For example (11/04)


LUMEN OUTPUT:

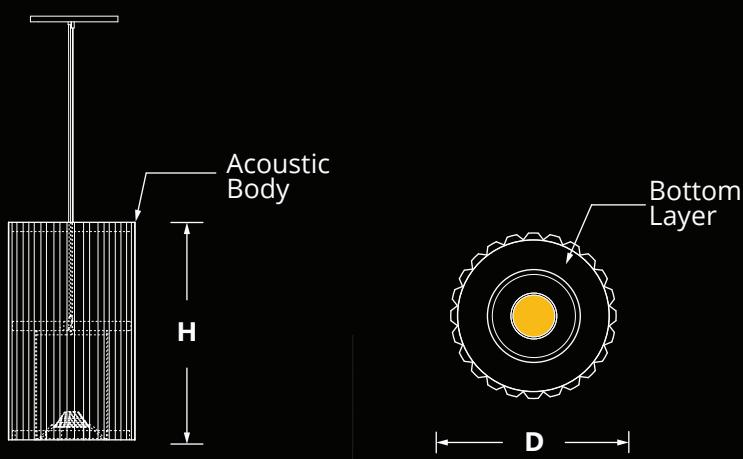
Watts	30K	35K	40K
15 W	1400 lm	1430 lm	1460 lm
20 W	1910 lm	1950 lm	1990 lm
25 W	2350 lm	2400 lm	2450 lm


Project:
Type:

905-830-0339 / 1-800-667-9281

info@edisonlighting.ca

www.edisonlighting.ca

SIZE:


H - Height	Diameter
12 in = 11.75 in	8.00 in
16 in = 15.75 in	8.00 in
24 in = 23.75 in	8.00 in

FINISHES:


(11/04)



(05/04)



(25/04)



(26/04)



(03/04)



(01/04)



(09/25)



(12/24)