

FEATURES:

- ✓ Architectural Y-shaped luminaire with direct distribution.
- ✓ Light source: 11" LED modular board.
- ✓ Dark Optic provides superior lighting distribution with precise low glare illumination.
- ✓ Offered with Flood 50°/10UGR or Wide Flood 80°/15UGR internal optic.
- ✓ Suitable for surface, suspended and recessed installations.
- ✓ Extruded aluminum body comes with a black or white finish.
- ✓ Also available with custom color options.
- ✓ LEDs are rated for 60,000 hrs. L80 with +90 CRI
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

SPECIFICATION:

ED TRIAD+

TYPE

SIZE

SOURCE

RADIANCE

VOLTAGE

DRIVER

MOUNTING

BEAM

REFLECTOR

FINISH

CCT

OPTION

Enter the Product Code into the boxes above.

TYPE

☐ DO - Dark Optic

SIZE

☐ Ft*
*1-8 Ft Arm length.

SOURCE

- ☐ 3 W/Ft
☐ 5 W/Ft
☐ 8 W/Ft

RADIANCE

☐ DD - Direct (100%Down)
*Light Distribution.

VOLTAGE

☐ UNV- (120/277V)
☐ 347V*
*Not available for all configurations.

DRIVER

☐ ST - On/Off
☐ DL - 0-10V Dim (1%)
☐ DLO - 0-10V Dim (to Off)
☐ DA4 - DALI D4i
☐ *
*Specify dimming protocol.

MOUNTING

- ☐ S6W - 6Ft Cord WH*
☐ S6B - 6Ft Cord BK*
☐ S Ft**
☐ WF - Wall Flush
☐ SF - Surface Mount
☐ RT - Recessed Trimless

*Canopy will match the Cord color.
**Specify Suspension length and color.

BEAM

- ☐ FB - Flood 50°
☐ WF - Wide Flood 80°

REFLECTOR

- ☐ SB - Black
☐ SW - White
☐ SR - Red
☐ SL - Silver
☐ SG - Gold
☐ SM - Gunmetal

FINISH

☐ BK - Black*
☐ WH - White**
☐ CF/RAL ***
*RAL 9005
**RAL 9016
***Specify required RAL number.

CCT

☐ 30K - 3000 Kelvin/90CRI
☐ 35K - 3500 Kelvin/90CRI
☐ 40K - 4000 Kelvin/90CRI
☐ *
*Specify required CCT.

OPTIONS

☐ No Options*
☐ CB - Casambi/Bluetooth
☐ **
*Leave empty.
**Specify required option.

LUMEN OUTPUT W/Ft:



Watts	30K	35K	40K
3W	395 lm	405 lm	415 lm
5W	660 lm	675 lm	690 lm
8W	1050 lm	1080 lm	1130 lm



Project:

Type:

SIZE:

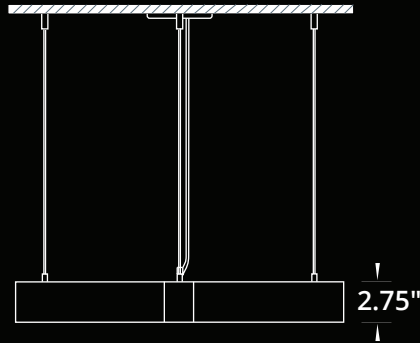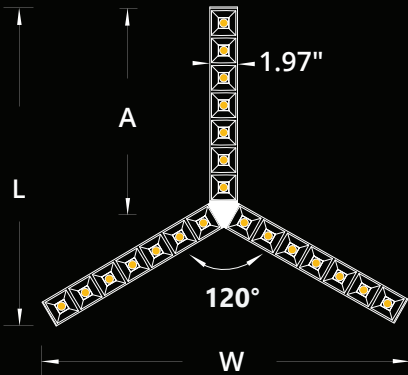


Size	A	L x W
1 Ft	11.90 In	18.70 x 21.60 In
2 Ft	22.90 In	35.20 x 40.65 In
3 Ft	33.90 In	51.70 x 59.70 In
4 Ft	44.90 In	68.20 x 78.75 In
5 Ft	55.90 In	84.70 x 97.80 In
6 Ft	66.90 In	101.20 x 116.85 In
7 Ft	77.90 In	117.70 x 135.90 In
8 Ft	88.90 In	134.20 x 154.96 In

*A - Arm Length
 **L - Total Length
 *** W - Total Width
 ****Filler Plate included in Arm length.


RADIANCE:



BEAM ANGLE:



Flood Beam



Wide Flood Beam

REFLECTORS:

SQUARE



WHITE



SILVER



BLACK



GOLD




RED




GUNMETAL

MOUNTING:

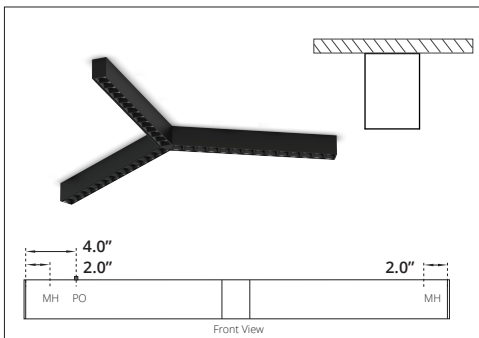


SURFACE MOUNT

MH - Mounting Hole
 PO - Power Opening

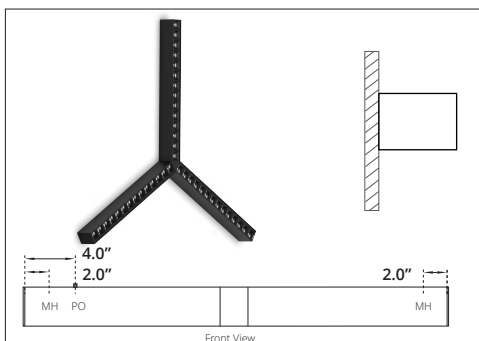


WALL FLUSH

MH - Mounting Hole
 PO - Power Opening

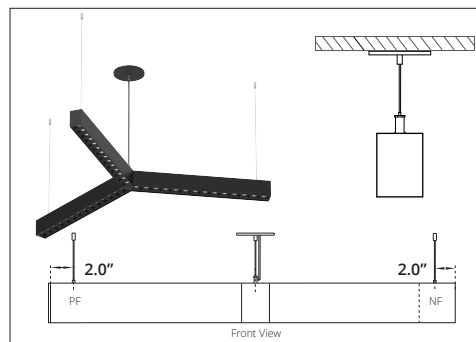

SUSPENDED

PF - Power Feed
 NF - Non Power Feed

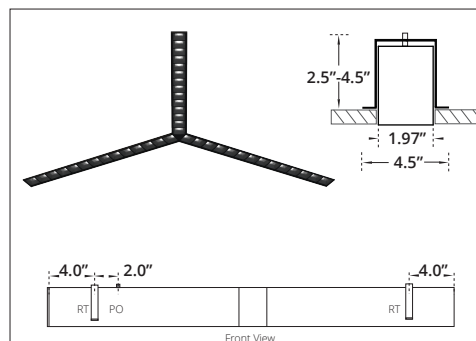

RECESSED TRIMLESS

RT - Recessed Trimless Bracket
 PO - Power Opening
 *Cutout Dimensions = Total Length x Width of Extrusion.