



### FEATURES:

- ✓ Architectural floor luminaire with direct/indirect distribution.
- ✓ Light source: 11" LED board (direct) and 22" LED board (indirect).
- ✓ Direct lighting is distributed by Dark Optic with precise, low glare illumination.
- ✓ 7 cell LEDiL reflector is available in several standard finishes.
- ✓ Offered with regular 50°/16UGR and flood 80°/19UGR internal optic.
- ✓ Controlled by on/off switch or optional Casambi Bluetooth dimming module.
- ✓ Extruded aluminum body comes in black, white or grey color.
- ✓ Comes with standard 8 foot plug-in cord.
- ✓ LEDs are rated for 60,000hrs. L80 with +90CRI.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

### SPECIFICATION:

ED VECTOR+  —  —  —  —  —  —  —  —  —  —

Enter the Product Code into the boxes above.

#### TYPE

- FL - Floor Lamp

#### SOURCE

- 20W LED
- 30W LED

#### RADIANCE

- DI - Direct/Indirect

#### VOLTAGE

- 120V

#### DRIVER

- ST - Standard\*
- DL - 0-10V Dimming\*\*
- \*\*\*

\*On/off switch.  
\*\*Casambi Bluetooth.  
\*\*\*Please specify dimming method

#### REFLECTOR

- WH - White
- BK - Black
- SL - Silver

#### LENS

- RB - Regular 50°
- FB - Floor 80°

#### FINISH

- WH - White
- BK - Black
- GR - Grey


#### CCT

- 30K/90CRI - 3000Kelvin
- 35K/90CRI - 3500Kelvin
- 40K/90CRI - 4000Kelvin

#### OPTIONS

- No Options\*
- DC - Dual Circuit\*\*

\*Leave empty.  
\*\*Control down/up separately.

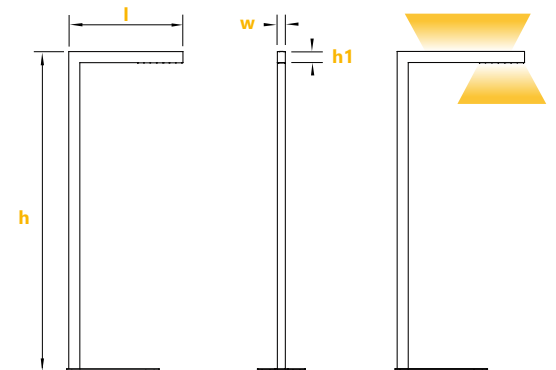

### DIMENSIONS:

Length	Width	Height	Height 1	Base Plate
27.75"	2.00"	79.00"	2.75"	12.00" x 22.88"

### LUMEN OUTPUT:

Watts	30K	35K	40K
20W	2295 lm	2340 lm	2385 lm
30W	3340 lm	3510 lm	3580 lm



Project:

Type: