


FEATURES:

- ✓ Architectural system with direct or direct-indirect lighting distribution.
- ✓ Light source: LED boards.
- ✓ Diffused illumination is provided by high efficiency frosted opal lens or by optional prismatic optic.
- ✓ Sleek body of the luminaire combine two aluminum sides with laser cut metal top enclosure and integrated LED driver.
- ✓ Suitable for suspended and surface mounted installations.
- ✓ Extruded aluminum body comes with white, black or grey finish.
- ✓ Available with custom color options or unique shape configurations.
- ✓ LED Strips are rated for 60,000hrs. L80 with +85 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards. **reinventlight**

SPECIFICATION:

ED CURVES+ - - - - - - - - - - -

Custom Shape Example: ED CURVES+CS-1xB45°-2xC60°-7W/Ft LED-DD-120V-ST-S6-OP-WH-30K

Enter the Product Code into the boxes above.

SHAPE

- LN - Line
- TR - Triangle
- SQ - Square
- OV - Oval
- CR - Curve
- SP - Spiral
- IF - Infinity
- CS - Custom Shape *

* Please specify Custom Shape.

SIZE

- A-30°
- B-45°
- C -60°
- D-90°
- E-120°
- F -180°
- *

* Please specify Custom Size.

SOURCE

- 5W/Ft LED
- 7W/Ft LED
- 10W/Ft LED*

* UD lighting distribution only.

RADIANCE

- DD - Direct (100%Down)
- UD - Uneven(70%Down/30%Up)**

*Light Distribution.
**Suspended Configuration only.

VOLTAGE

- 120V
- 277V
- 347V*

*Not available for all configurations.

DRIVER

- ST - Standard
- DL - 0-10V Dimming (1%)
- DA - DALI
- *

* Please specify dimming method (ELV).

MOUNTING

- S4-Suspension 4Feet
- S6-Suspension 6Feet
- S Feet*
- SF - Surface Mount

*Please specify required Length.

LENS

- OP - Opal
- PR - Prismatic

FINISH

- WH - White
- BK - Black
- GR - Grey
- CF - Custom RAL#

CCT

- 30K - 3000Kelvin
- 35K - 3500Kelvin
- 40K - 4000Kelvin

*Other options are available.

OPTIONS

- No Options*
- 90 CRI
- CB - Casambi BT
- DC - Dual Circuit**

*Leave Empty.
**Down /Up Control separately.
***Combination example (90CRI/DS).


LUMEN OUTPUT W/Ft:

Watts	30K	35K	40K
5W	515 lm	525 lm	535 lm
7W	720 lm	735 lm	750 lm
10W	1030lm	1050 lm	1080 lm

Project:

Type:



SIZE:




RADIANCE:




ANGLES:

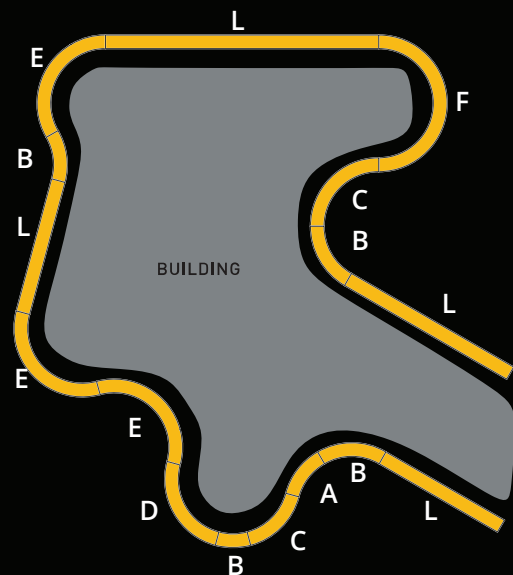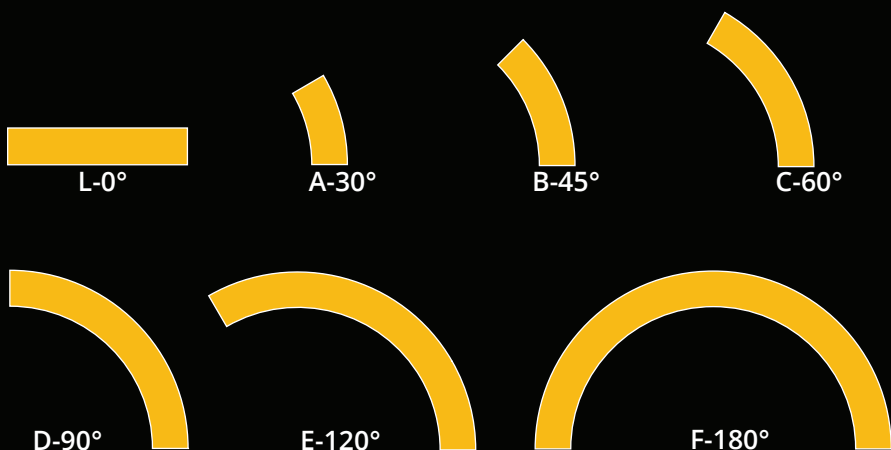


SHAPES:

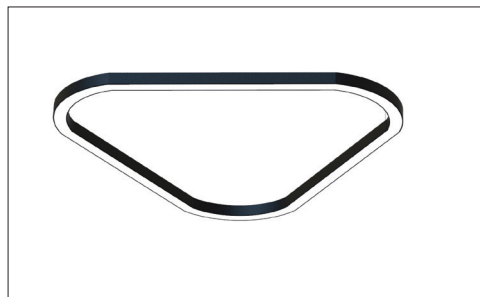

TRIANGLE

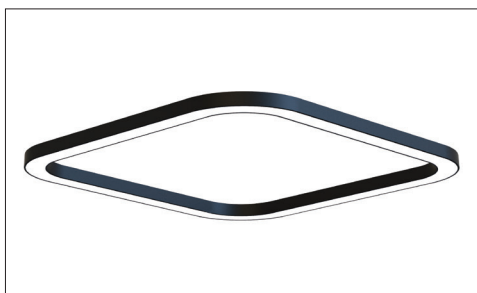


SQUARE

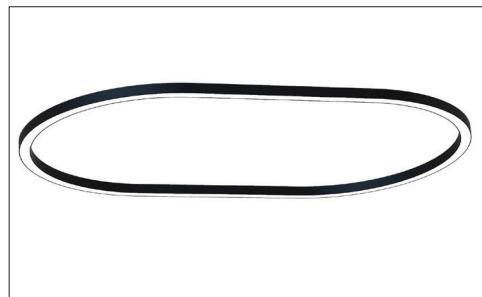


OVAL


CUSTOM DESIGNS:

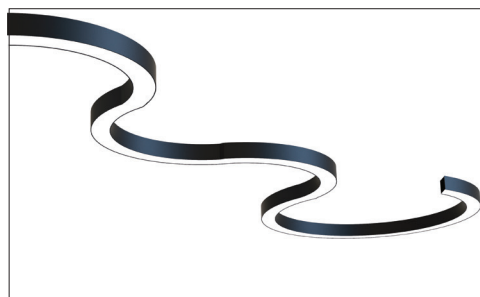

CONTINUOUS CURVES

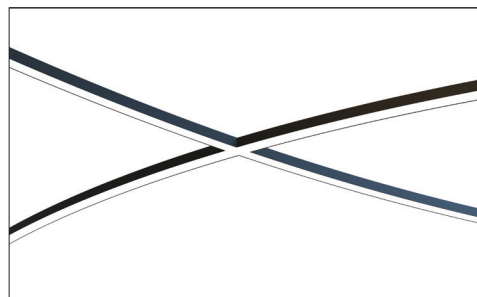

INTERSECTING

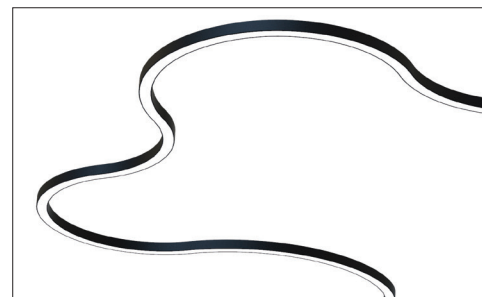

CUSTOM DESIGN