



## FEATURES:

- ✓ Architectural luminaire with direct-indirect lighting distribution.
- ✓ Light source: BIOS SkyBlue LED Tape.
- ✓ Circadian lighting technology with highest melanopic ratio improves daytime alertness, mood, productivity and brain function.
- ✓ Diffused illumination is provided by high efficiency frosted opal lens.
- ✓ Sleek body of the luminaire is made from curved aluminum profile.
- ✓ Suitable for suspended and surface mounted installations.
- ✓ Extruded aluminum body comes with white, black or grey finish.
- ✓ Remote driver is mounted in round ceiling canopy or optional rectangle enclosure.
- ✓ LED tape is rated for 50,000hrs. L80 with +80 CRI.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards. **reinventlight**

## SPECIFICATION:

**ED ORBIT+**

SIZE	SOURCE	RADIANCE	VOLTAGE	DRIVER	MOUNTING	LENS	FINISH	CCT	OPTIONS
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Enter the Product Code into the boxes above.

### SIZE

- ☐ 2 Feet
- ☐ 3 Feet
- ☐ 4 Feet

### SOURCE

- ☐ 25WLED
- ☐ 50WLED
- ☐ 75WLED\*

\*Available for 4 & 5 Feet.  
 \*\*Other Wattages are available.

### RADIANCE

- ☐ IL - In Lit (100% Inward)
- ☐ OL - Out Lit (100% Outward)

\*Light Distribution.

### VOLTAGE

- ☐ 120V
- ☐ 277V
- ☐ 347V\*

\*Not available for all configurations.  
 \*Functionality and controls may be limited.

### DRIVER

- ☐ ST - Standard
- ☐ DL - 0-10V Dimming (1%)
- ☐ DA - DALI
- ☐ DT - TRIAC

### MOUNTING

- ☐ C4-Canopy 4Feet
- ☐ C6-Canopy 6Feet
- ☐ C  Feet\*
- ☐ D4-Drop 4Feet
- ☐ D6-Drop 6Feet
- ☐ D  Feet\*
- ☐ S4-Suspension 4Feet\*\*
- ☐ S6-Suspension 6Feet\*\*
- ☐ S  Feet\*
- ☐ SF - Surface Mount\*\*

\*Please specify required Length.  
 \*\*Remote Driver.

### LENS

- ☐ OP - Opal

### FINISH

- ☐ WH - White
- ☐ BK - Black
- ☐ GR - Grey
- ☐ CF - Custom

### CCT

- ☐ 30KS/BIOS - 3000K Static\*
- ☐ 35KS/BIOS - 3500K Static\*
- ☐ 40KS/BIOS - 4000K Static\*
- ☐ 30KD/BIOS - 3000K Dynamic\*\*
- ☐ 35KD/BIOS - 3500K Dynamic\*\*
- ☐ 40KD/BIOS - 4000K Dynamic\*\*

\*Static-Daytime Use.  
 \*\*Dynamic-Daytime/Evening Use (dims down to 2700K).

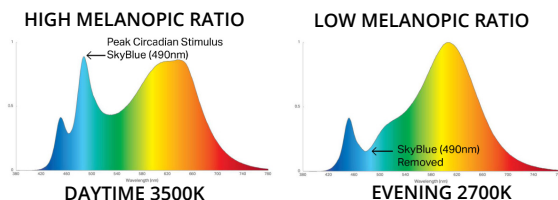
### OPTIONS

- ☐ No Options\*
- ☐ CB - Casambi BT
- ☐ DS - Daylight Sensor
- ☐ DC - Dual Circuit\*\*
- ☐ OS - Occupancy Sensor
- ☐ DOS - Daylight & Occupancy Sensor

\*Leave Empty.  
 \*\*Down /Up Control separately.  
 \*\*\*Combination example (CB/DS).


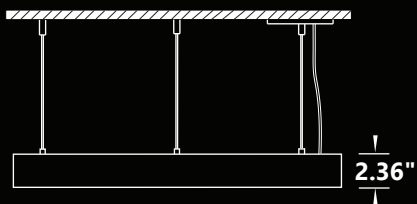
## LUMEN OUTPUT:

Watts	30K	35K	40K
25W	2205 lm	2250 lm	2295 lm
50W	4410 lm	4500 lm	4590 lm
75W	6610 lm	6750 lm	6890 lm

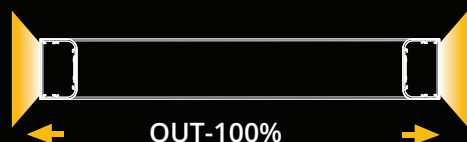
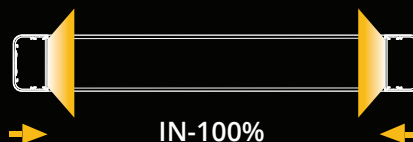


Project:

Type:

**SIZE:**


Diameter		
Size	Outer Lit	Inner Lit
2 Feet	27.952 Inch	25.196 Inch
3 Feet	34.250 Inch	37.795 Inch
4 Feet	46.456 Inch	44.094 Inch

**RADIANCE:**
**OUT LIT**

**IN LIT**

**MOUNTING:**

**SUSPENDED - CEILING CANOPY**

**SUSPENDED - STRAIGHT WIRE\***

\*Remote Driver.


**DROP SUSPENSION\***

\*Remote Driver.


**SURFACE MOUNT\***

\*Remote Driver.