

**FEATURES:**

- ✓ Architectural luminaire with direct lighting distribution.
- ✓ Light source: COB LED.
- ✓ High efficiency low glare integral reflector comes in following beam angles: Spot 15°, Narrow Flood 35° and Flood 55°.
- ✓ Adjustable trim assembly can be tilted up to 30° for wall wash applications.
- ✓ Available with optional flat frame plate for NC installations.
- ✓ Suitable for recessed non insulated ceilings and dry locations.
- ✓ LED spot is rated for 60,000hrs. L70 with +85 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

**SPECIFICATION:**

ED SD+



Enter the Product Code into the boxes above.

**SIZE**

- 1x-Single

**SOURCE**

- 15W LED
- 20W LED
- 25W LED

**VOLTAGE**

- 120V
- 277V
- 347V\*

\*Not available for all configurations.

**DRIVER**

- ST - Standard
- DL - 0-10V Dimming
- DT - TRIAC
- \*

\* Please specify dimming method.

**MOUNTING**

- RT -Retrofit
- NC- New Const. Plate

**REFLECTOR**

- SP - Spot
- NF - Narrow Flood
- FL - Flood

**LOUVER**

- MW - Matt White
- MB - Matt Black
- MS - Matt Silver

**TRIM**

- WH - White
- BK- Black
- GR - Grey

**CCT**

- 30K - 3000Kelvin
- 35K - 3500Kelvin
- 40K - 4000Kelvin

\*Other options are available.


**OPTIONS**

- No Options\*
- 90 CRI

\*Leave Empty.

**DIMENSIONS:**

| Size   | Height | Width | Length | Cut Out    |
|--------|--------|-------|--------|------------|
| Single | 4.88"  | 4.13" | 4.13"  | 3.69x3.69" |

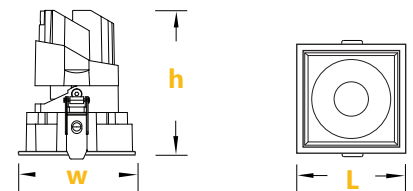

**LUMEN OUTPUT:**

| Watts | 30K     | 35K     | 40K     |
|-------|---------|---------|---------|
| 15W   | 1425 lm | 1455 lm | 1485 lm |
| 20W   | 1900 lm | 1940 lm | 1980 lm |
| 25W   | 2375 lm | 2425 lm | 2475 lm |

Project:

Type: