


bios
 ILLUMINATED

FEATURES:

- ✓ Architectural sound absorbing Eco Felt Acoustic panel.
- ✓ Light source: BIOS SkyBlue LED COB.
- ✓ Circadian lighting technology with highest melanopic ratio improves daytime alertness, mood, productivity and brain function.
- ✓ Acoustic polyester is made from recyclable plastic material available in different thicknesses.
- ✓ Class1 Fire rated with 0.7 Noise Reduction Coefficient/1" Acoustic.
- ✓ High efficiency integral reflector combined with opal lens insert provides excellent lighting distribution.
- ✓ Circular internal louver is available in a wide range of finishes.
- ✓ Aluminum body of the luminaire comes with built-in-driver.
- ✓ LED COB is rated for 50,000hrs. L80 with +80 CRI.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight
SPECIFICATION:
Sonic TUBE+

TYPE	HEIGHT	SOURCE	VOLTAGE	DRIVER	MOUNTING	LOUVER	TUBE FINISH	ACOSUTIC FINISH	CCT
------	--------	--------	---------	--------	----------	--------	-------------	-----------------	-----

Enter the Product Code into the boxes above.

TYPE

- ☐
- LS - Layered Shade

HEIGHT

- ☐
- 12 Inch
-
- ☐
- 16 Inch

SOURCE

- ☐
- 15W LED
-
- ☐
- 20W LED
-
- ☐
- 25W LED

VOLTAGE

- ☐
- 120V
-
- ☐
- 277V
-
- ☐
- 347V*

 *Not available for all configurations.
 *Functionality and controls may be limited.

DRIVER

- ☐
- ST - Standard
-
- ☐
- DL - 0-10V Dimming (1%)
-
- ☐
- DA - DALI
-
- ☐
- DT - TRIAC

MOUNTING

- ☐
- S4-Suspension 4Feet
-
- ☐
- S6-Suspension 6Feet
-
- ☐
- S
-
- Feet*

*Please specify required Length.

LOUVER

- ☐
- WH - White
-
- ☐
- BK - Black

ED TUBE

- ☐
- WH - White
-
- ☐
- BK - Black
-
- ☐
- GR - Grey

CCT

- ☐
- 30KS/BIOS - 3000K Static*
-
- ☐
- 35KS/BIOS - 3500K Static*
-
- ☐
- 40KS/BIOS - 4000K Static*
-
- ☐
- 30KD/BIOS - 3000K Dynamic**
-
- ☐
- 35KD/BIOS - 3500K Dynamic**
-
- ☐
- 40KD/BIOS - 4000K Dynamic**

 *Static-Daytime Use.
 **Dynamic-Daytime/Evening Use (dims down to 2700K).

OPTION

- ☐
- No Options*
-
- ☐
- CB - Casambi BT

*Leave Empty.



ACOUSTIC FINISH*

<input type="checkbox"/> 01	<input type="checkbox"/> 02	<input type="checkbox"/> 03	<input type="checkbox"/> 04	<input type="checkbox"/> 05	<input type="checkbox"/> 06	<input type="checkbox"/> 07	<input type="checkbox"/> 09	<input type="checkbox"/> 11	<input type="checkbox"/> 12
<input type="checkbox"/> 15	<input type="checkbox"/> 18	<input type="checkbox"/> 24	<input type="checkbox"/> 25	<input type="checkbox"/> 26	<input type="checkbox"/> 28	<input type="checkbox"/> 30	<input type="checkbox"/> 31	<input type="checkbox"/> 32	<input type="checkbox"/> 33

* Please specify Acoustic Layers & Bottom Plate finish, for example (01/04)

LUMEN OUTPUT:

Watts	30K	35K	40K
15W	1400 lm	1430 lm	1460 lm
20W	1910 lm	1950 lm	1990 lm
25W	2350 lm	2400 lm	2450 lm


HIGH MELANOPIC RATIO

LOW MELANOPIC RATIO


Project:

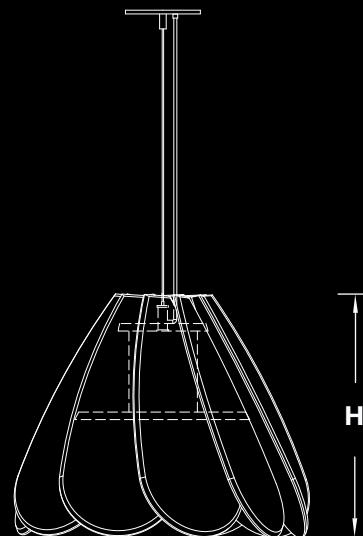
Type:

SIZE:

H - Height	Diameter
12 Inch = 11.75 Inch	16.00 Inch
18 Inch = 17.75 Inch	24.00 Inch



← D →


FINISHES:


(01)



(11)



(26)



(25)



(06)



(32)



(15)



(09)