

FEATURES:

- ✓ Architectural linear luminaire with direct or direct/indirect distribution.
- ✓ Light source: BIOS SkyBlue LED board (5.5"/11"/22").
- ✓ Circadian lighting technology with highest melanopic ratio improves daytime alertness, mood, productivity and brain function.
- ✓ Diffused illumination is provided by high efficiency frosted opal lens.
- ✓ Suitable for surface, suspended and recessed installations.
- ✓ Extruded aluminum body comes with white, black or grey finish.
- ✓ LED Strips are rated for 50,000hrs. L80 with +80 CRI.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

SPECIFICATION:

ED SQUARE+ — — — — — — — — —

Enter the order code into the boxes above.

SIZE

- ☐ 2x2 Feet
- ☐ 3x3 Feet
- ☐ 4x4 Feet
- ☐ *

*Specify required size.

SOURCE

- ☐ 25WLED
- ☐ 50WLED
- ☐ 75WLED*

* Available for 3 & 4 Feet.

RADIANCE

- ☐ DD - Direct (100%Down)
- ☐ ID - Indirect (100%Up)**
- ☐ UD - Uneven(70%Down/30%Up)**
- ☐ IL - In Lit
- ☐ OL - Out Lit

*Light Distribution.

**Suspended Configuration only.

VOLTAGE

- ☐ 120V
- ☐ 277V
- ☐ 347V*

*Not available for all configurations.

*Functionality and controls may be limited.

DRIVER

- ☐ ST - Standard
- ☐ DL - 0-10V Dimming (1%)
- ☐ DA - DALI
- ☐ DT - TRIAC

MOUNTING

- ☐ S4-Suspension 4Feet
- ☐ S6-Suspension 6Feet
- ☐ S Feet*
- ☐ WM - Wall Mount
- ☐ SF - Surface Mount
- ☐ RT - Recessed Trimless

*Please specify required Length.

LENS

- ☐ OP - Opal

FINISH

- ☐ WH - White
- ☐ BK - Black
- ☐ GR - Grey
- ☐ CF - Custom

CCT

- ☐ 30KS/BIOS - 3000K Static*
- ☐ 35KS/BIOS - 3500K Static*
- ☐ 40KS/BIOS - 4000K Static*
- ☐ 30KD/BIOS - 3000K Dynamic**
- ☐ 35KD/BIOS - 3500K Dynamic**
- ☐ 40KD/BIOS - 4000K Dynamic**

*Static-Daytime Use.

**Dynamic-Daytime/Evening Use (dims down to 2700K).

OPTIONS

- ☐ No Options*
- ☐ CB - Casambi BT
- ☐ DS - Daylight Sensor
- ☐ DC - Dual Circuit**
- ☐ OS - Occupancy Sensor
- ☐ DOS - Daylight & Occupancy Sensor

*Leave Empty.


**Down /Up Control separately.

***Combination example (CB/DS).


LUMEN OUTPUT:

Watts	30K	35K	40K
25W	2610 lm	2650 lm	2690 lm
50W	5150 lm	5250 lm	5380 lm
75W	7720 lm	7875 lm	8030 lm

HIGH MELANOPIC RATIO




LOW MELANOPIC RATIO



Project:


Type:

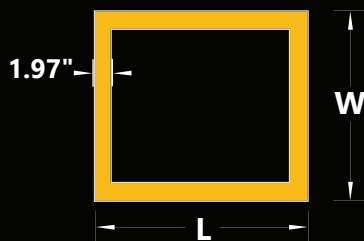SIZE:


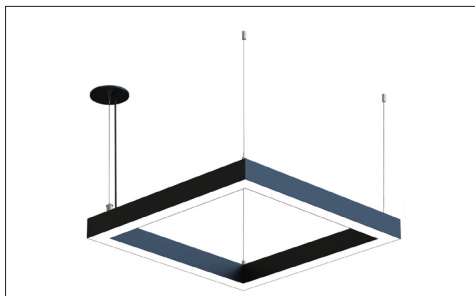
Size	Width x Length
2 Feet	24.50x24.50 Inch
3 Feet	35.50x35.50 Inch
4 Feet	46.50x46.50 Inch

RADIANCE:
DIRECT DISTRIBUTION


UNEVEN DISTRIBUTION

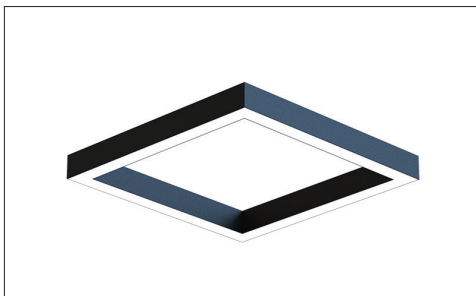MOUNTING:


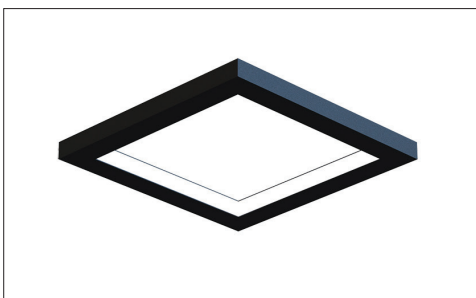
SURFACE MOUNT




SUSPENDED

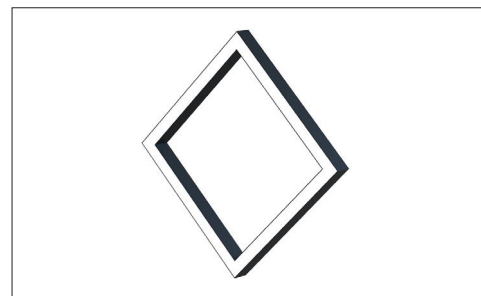


WALL MOUNT



IN LIT

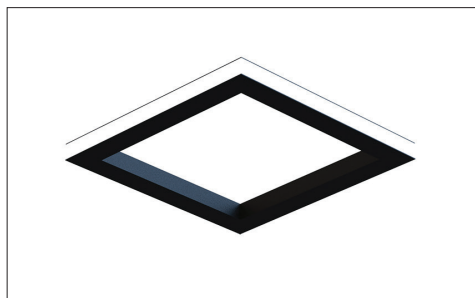

OUT LIT

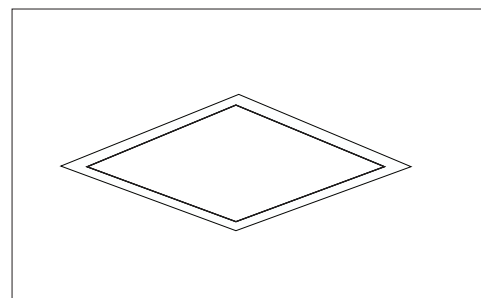

RECESSED TRIMLESS