

### FEATURES:

- ✓ Architectural linear luminaire with direct distribution.
- ✓ Light source: LED board (5.5"/11"/22"/24").
- ✓ Diffused illumination is provided by frosted opal lens.
- ✓ Available for row mounted installations in various lengths.
- ✓ Suitable for recessed, recessed T-Bar installations.
- ✓ Extruded aluminum body comes with white, black or grey finish.
- ✓ Also available with custom color options or vinyl decals.
- ✓ LED Strips are rated for 60,000hrs. L80 with +85 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

### SPECIFICATION:

**ED VECTOR3+**  SIZE —  SOURCE —  RADIANCE —  VOLTAGE —  DRIVER —  MOUNTING —  LENS —  FINISH —  CCT —  OPTIONS

Enter the Product Code into the boxes above.

**SIZE**  
 \_\_\_\_\_ Feet

- SOURCE**
- 5W/Ft LED
  - 7W/Ft LED
  - 10W/Ft LED

- RADIANCE**
- DD - Direct (100%Down)
- \*Light Distribution.

- VOLTAGE**
- 120V
  - 277V
  - 347V\*
- \*Not available for all configurations.

- DRIVER**
- ST - Standard
  - DL - 0-10V Dimming (1%)
  - DA - DALI
  - \*
  - EC - Emergency Circuit
  - EM - Emergency\*\*
- \* Please specify dimming method (ELV).  
 \*\*Battery Pack per 4Feet section.

- MOUNTING**
- RS - Recessed
  - RB - Recessed T-Bar

- LENS**
- OP - Opal
  - PR - Prismatic

- FINISH**
- WH - White
  - BK - Black
  - GR - Grey
  - CF - Custom
  - VD - Vinyl Decal\*
- \* Please provide 600dpi Image.

- CCT**
- 30K - 3000Kelvin
  - 35K - 3500Kelvin
  - 40K - 4000Kelvin
  - TW - Tunable White\*\* (2700K-6500K)
- \*Other options are available.  
 \*\*Available with Dali controls.

- OPTIONS**
- No Options\*
  - 90 CRI
  - DS-Daylight Sensor
  - OS - Occupancy Sensor
  - DOS - Daylight & Occupancy Sensor
- \*Leave Empty.  
 \*\*Combination example (90CRI/DS).


### LUMEN OUTPUT W/Ft:

Watts	30K	35K	40K
5W	515 lm	525 lm	535 lm
7W	720 lm	735 lm	750 lm
10W	1030 lm	1050 lm	1080 lm

**Project:**

**Type:**

**SIZE:**

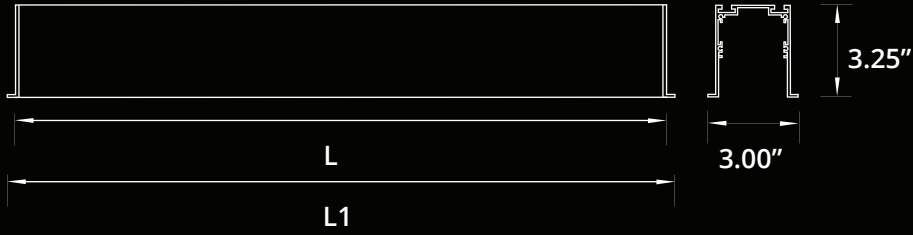


Size	L(CUTOUT)	L1(T-BAR)
1 Feet	11.75 Inch	11.75 Inch
2 Feet	24.50 Inch	23.75 Inch
3 Feet	35.50 Inch	35.75 Inch
4 Feet	48.25 Inch	47.75 Inch
5 Feet	59.25 Inch	59.75 Inch
6 Feet	72.00 Inch	71.75 Inch
7 Feet	83.00 Inch	83.75 Inch
8 Feet	95.75 Inch	95.75 Inch

**RADIANCE:**


**DIRECT DISTRIBUTION**




**MOUNTING:**

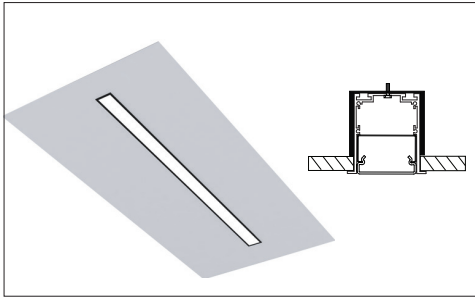


RECESSED

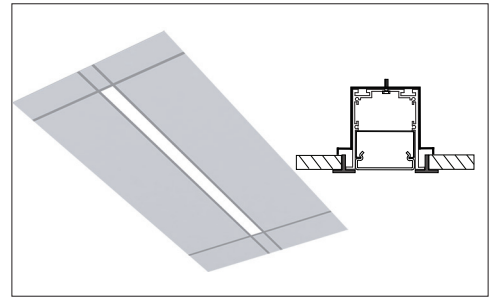

RECESSED T-BAR

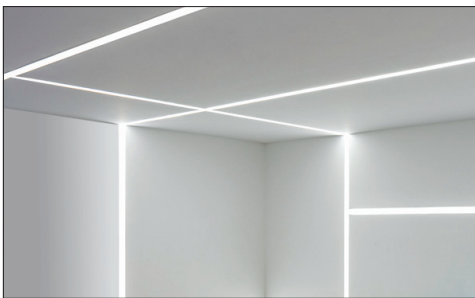

90° IN (WALL TO CEILING)

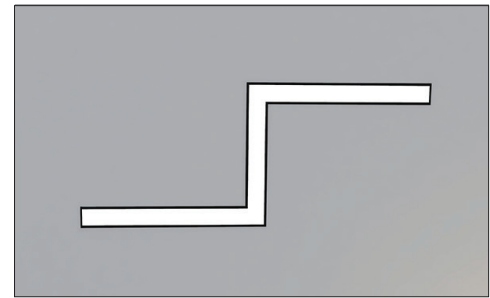

90° LEFT/90° RIGHT