



## FEATURES:

- ✓ Architectural linear luminaire with direct or direct/indirect distribution.
- ✓ Light source: BIOS SkyBlue LED board (5.5"/11"/22").
- ✓ Circadian lighting technology with highest melanopic ratio improves daytime alertness, mood, productivity and brain function.
- ✓ Diffused illumination is provided by frosted opal lens.
- ✓ Available for row mounted installations in various lengths.
- ✓ Suitable for suspended, wall mounted installations.
- ✓ Extruded aluminum body comes with white, black or grey finish.
- ✓ LED Strips are rated for 50,000hrs. L80 with +80 CRI.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

## SPECIFICATION:

**ED VECTOR5+**

SIZE	SOURCE	RADIANCE	VOLTAGE	DRIVER	MOUNTING	LENS	FINISH	CCT	OPTIONS
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Enter the Product Code into the boxes above.

### SIZE

\_\_\_\_\_ Feet

### SOURCE

- ☐ 5W/Ft LED
- ☐ 10W/Ft LED
- ☐ 15W/Ft LED

### RADIANCE

- ☐ ED - Even(50%Down/50%Up)
- ☐ UD - Uneven(70%Down/30%Up)
- ☐ DD - Direct (100%Down)
- ☐ ID - Indirect (100%Up)

\*Light Distribution.

### VOLTAGE

- ☐ 120V
- ☐ 277V
- ☐ 347V\*

 \*Not available for all configurations.  
 \*Functionality and controls may be limited.

### DRIVER

- ☐ ST - Standard
- ☐ DL - 0-10V Dimming (1%)
- ☐ DA - DALI
- ☐ DT - TRIAC

### MOUNTING

- ☐ S4-Suspension 4Feet
- ☐ S6-Suspension 6Feet
- ☐ S  Feet\*
- ☐ WM - Wall Mount
- ☐ WF - Wall Flush

\*Please specify required Length.

### LENS

- ☐ OP - Opal
- ☐ PR - Prismatic

### FINISH

- ☐ WH - White
- ☐ BK - Black
- ☐ GR - Grey
- ☐ CF - Custom

RAL#

### CCT

- ☐ 30KS/BIOS - 3000K Static\*
- ☐ 35KS/BIOS - 3500K Static\*
- ☐ 40KS/BIOS - 4000K Static\*
- ☐ 30KD/BIOS - 3000K Dynamic\*\*
- ☐ 35KD/BIOS - 3500K Dynamic\*\*
- ☐ 40KD/BIOS - 4000K Dynamic\*\*

\*Static-Daytime Use.

\*\*Dynamic-Daytime/Evening Use (dims down to 2700K).

### OPTIONS

- ☐ No Options\*
- ☐ CB - Casambi BT
- ☐ DS - Daylight Sensor
- ☐ DC - Dual Circuit\*\*
- ☐ OS - Occupancy Sensor
- ☐ DOS - Daylight & Occupancy Sensor

\*Leave Empty.


\*\*Down /Up Control separately.

\*\*\*Combination example (CB/DS).


## LUMEN OUTPUT W/Ft:

Watts	30K	35K	40K
5W	535 lm	550 lm	565 lm
10W	1070 lm	1100 lm	1130 lm
15W	1610 lm	1650 lm	1690 lm

### HIGH MELANOPIC RATIO

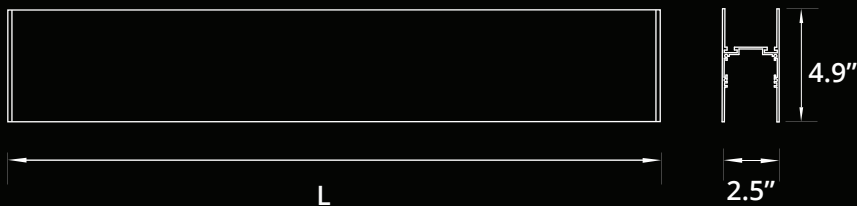


### LOW MELANOPIC RATIO



Project:

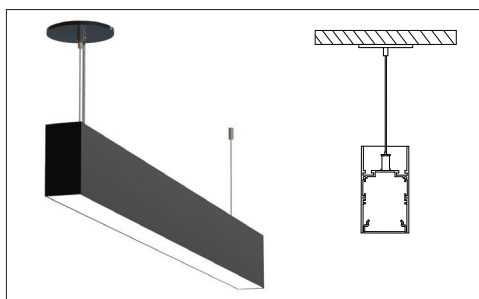
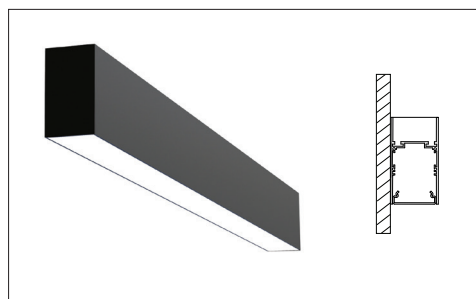
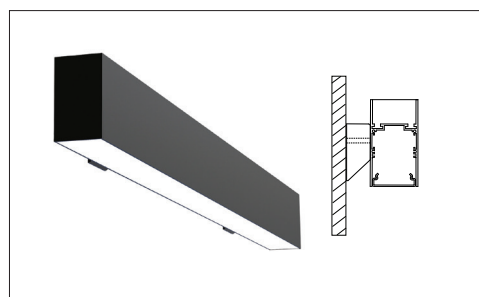
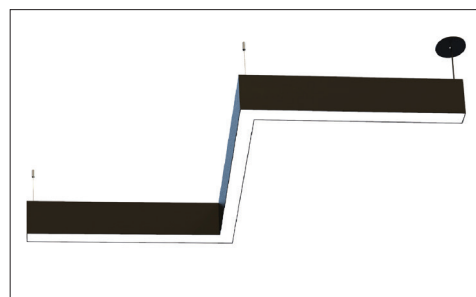
Type:

**SIZE:**


Size	L (LENGTH)
1 Feet	11.75 Inch
2 Feet	22.75 Inch
3 Feet	33.75 Inch
4 Feet	44.75 Inch
5 Feet	55.75 Inch
6 Feet	66.75 Inch
7 Feet	77.75 Inch
8 Feet	88.75 Inch

**RADIANCE:**
**EVEN DISTRIBUTION**

**UNEVEN DISTRIBUTION**

**MOUNTING:**

**SUSPENDED**

**WALL FLUSH**

**WALL MOUNT**

**90° LEFT/90° RIGHT WITH**