

FEATURES:

- ✓ Architectural linear luminaire with direct distribution.
- ✓ Light source: BIOS SkyBlue LED board (5.5"/11"/22").
- ✓ Circadian lighting technology with highest melanopic ratio improves daytime alertness, mood, productivity and brain function.
- ✓ Available for row mounted installations in various lengths.
- ✓ Suitable for recessed drywall or recessed T-Bar installation and damp area installations.
- ✓ Extruded aluminum body comes in white, black or grey finish.
- ✓ Also available with custom color options
- ✓ LED Strips are rated for 50,000hrs. L80 with +80 CRI.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

SPECIFICATION:

ED VECTOR+

SIZE	SOURCE	RADIANCE	VOLTAGE	DRIVER	MOUNTING	LENS	FINISH	CCT	OPTIONS
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Enter the Product Code into the boxes above.

SIZE

_____ Feet

SOURCE

- ☐ 5W/Ft LED
- ☐ 7W/Ft LED

RADIANCE

- ☐ DD - Direct (100%Down)

*Light Distribution.

VOLTAGE

- ☐ 120V
- ☐ 277V
- ☐ 347V*

*Not available for all configurations.
*Functionality and controls may be limited.

DRIVER

- ☐ ST - Standard
- ☐ DL - 0-10V Dimming (1%)
- ☐ DA - DALI
- ☐ DT - TRIAC

MOUNTING

- ☐ RS - Recessed
- ☐ RB - Recessed T-Bar

LENS

- ☐ OP - Opal
- ☐ PR - Prismatic
- ☐ BL - Black Lens
- ☐ AR - Aluminum Reflector*

* Available for 4Feet only.

FINISH

- ☐ WH - White
- ☐ BK - Black
- ☐ GR - Grey
- ☐ CF - Custom

CCT

- ☐ 30KS/BIOS - 3000K Static*
- ☐ 35KS/BIOS - 3500K Static*
- ☐ 40KS/BIOS - 4000K Static*
- ☐ 30KD/BIOS - 3000K Dynamic**
- ☐ 35KD/BIOS - 3500K Dynamic**
- ☐ 40KD/BIOS - 4000K Dynamic**

*Static-Daytime Use.
**Dynamic-Daytime/Evening Use (dims down to 2700K).

OPTIONS


- ☐ No Options*
- ☐ CB - Casambi BT
- ☐ DR - Damp Rated
- ☐ DS - Daylight Sensor
- ☐ DC - Dual Circuit**
- ☐ OS - Occupancy Sensor
- ☐ DOS - Daylight & Occupancy Sensor

*Leave Empty.
**Down /Up Control separately.
***Combination example (DR/DS).


LUMEN OUTPUT W/Ft:

Watts	30K	35K	40K
5W	515 lm	525 lm	535 lm
7W	720 lm	735 lm	750 lm

HIGH MELANOPIC RATIO




LOW MELANOPIC RATIO




Project:

Type:

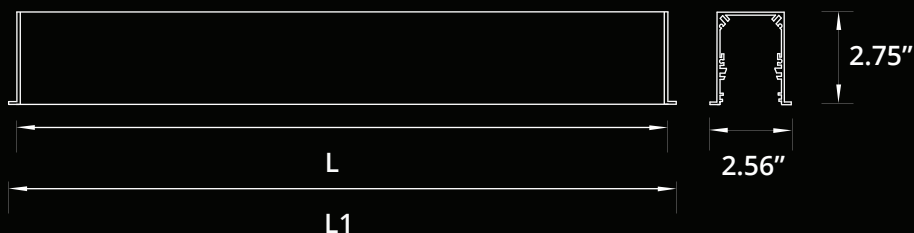
SIZE:


Size	L(CUTOUT)	L1(T-BAR)
1 Feet	11.813 Inch	11.750 Inch
2 Feet	24.563 Inch	23.750 Inch
3 Feet	35.563 Inch	35.750 Inch
4 Feet	48.313 Inch	47.750 Inch
5 Feet	59.313 Inch	59.750 Inch
6 Feet	72.063 Inch	71.750 Inch
7 Feet	83.063 Inch	83.750 Inch
8 Feet	95.813 Inch	95.750 Inch


RADIANCE:
DIRECT DISTRIBUTION

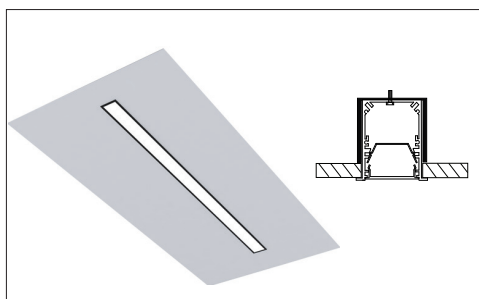MOUNTING:


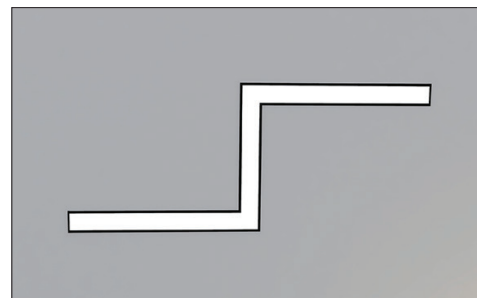
RECESSED

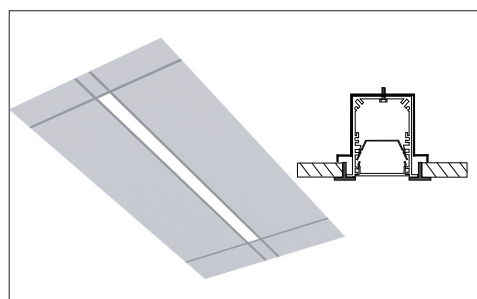

RECESSED T-BAR

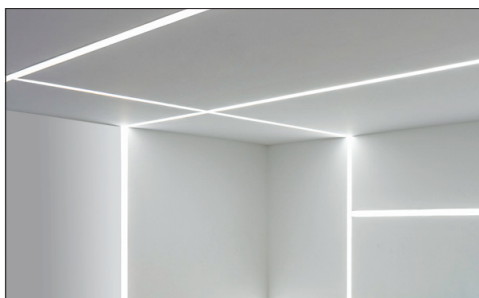

90° IN (WALL TO CEILING)



RECESSED-90° LEFT/90° RIGHT