

FEATURES:

- ✓ Architectural linear luminaire with direct or direct/indirect distribution.
- ✓ Light source: BIOS SkyBlue LED board (5.5"/11"/22").
- ✓ Circadian lighting technology with highest melanopic ratio improves daytime alertness, mood, productivity and brain function.
- ✓ Diffused illumination is provided by high efficiency frosted opal lens.
- ✓ Suitable for surface, suspended and recessed installations.
- ✓ Extruded aluminum body comes with white, black or grey finish.
- ✓ LED Strips are rated for 50,000hrs. L80 with +80 CRI.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

SPECIFICATION:

ED VERTEX+

SIZE	SOURCE	RADIANCE	VOLTAGE	DRIVER	MOUNTING	LENS	FINISH	CCT	OPTIONS
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Enter the Product Code into the boxes above.

SIZE

- ☐ 2x2 Feet
- ☐ 3x3 Feet
- ☐ 4x4 Feet
- ☐ *

*Specify required length.
 ** Custom angles are available.

SOURCE

- ☐ 25WLED
- ☐ 50WLED
- ☐ 75WLED*

* Available for 3 & 4 Feet.

RADIANCE

- ☐ DD - Direct (100%Down)
- ☐ ID - Indirect (100%Up)**

*Light Distribution.
 **Suspended Configuration only.

VOLTAGE

- ☐ 120V
- ☐ 277V
- ☐ 347V*

*Not available for all configurations.
 *Functionality and controls may be limited.

DRIVER

- ☐ ST - Standard
- ☐ DL - 0-10V Dimming (1%)
- ☐ DA - DALI
- ☐ DT - TRIAC

MOUNTING

- ☐ S4-Suspension 4Feet
- ☐ S6-Suspension 6Feet
- ☐ S Feet*
- ☐ WM - Wall Mount
- ☐ SF - Surface Mount
- ☐ RT - Recessed Trimless

*Please specify required Length.

LENS

- ☐ OP - Opal

FINISH

- ☐ WH - White
- ☐ BK - Black
- ☐ GR - Grey
- ☐ CF - Custom

CCT

- ☐ 30KS/BIOS - 3000K Static*
- ☐ 35KS/BIOS - 3500K Static*
- ☐ 40KS/BIOS - 4000K Static*
- ☐ 30KD/BIOS - 3000K Dynamic**
- ☐ 35KD/BIOS - 3500K Dynamic**
- ☐ 40KD/BIOS - 4000K Dynamic**

*Static-Daytime Use.
 **Dynamic-Daytime/Evening Use (dims down to 2700K).


OPTIONS

- ☐ No Options*
- ☐ CB - Casambi BT
- ☐ DS - Daylight Sensor
- ☐ DC - Dual Circuit**
- ☐ OS - Occupancy Sensor
- ☐ DOS - Daylight & Occupancy Sensor

*Leave Empty.
 **Down /Up Control separately.
 ***Combination example (CB/DS).

LUMEN OUTPUT:



Watts	30K	35K	40K
25W	2610 lm	2650 lm	2690 lm
50W	5150 lm	5250 lm	5380 lm
75W	7720 lm	7875 lm	8030 lm

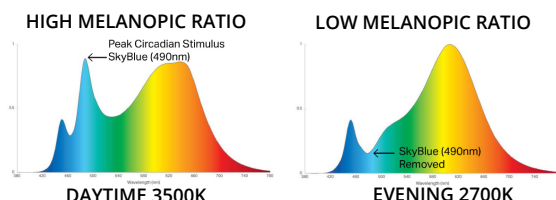

Project:

Type:

SIZE:

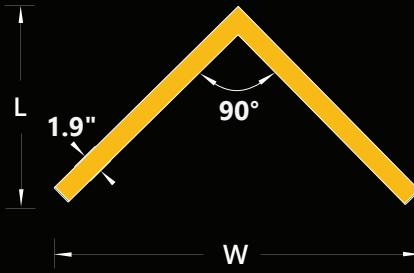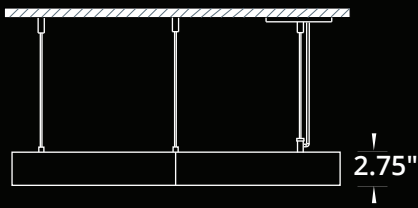

Size	LxW
2x2 Feet	18.00x33.40 Inch
3x3 Feet	25.80x48.97 Inch
4x4 Feet	33.57x64.54 Inch

RADIANCE:


DIRECT DISTRIBUTION




INDIRECT DISTRIBUTION



MOUNTING:

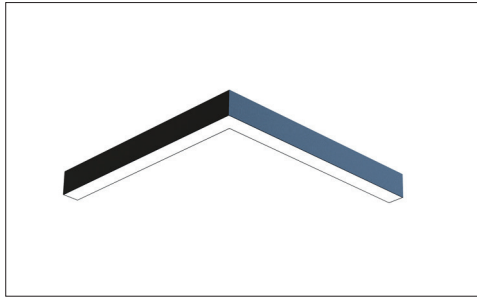


SURFACE MOUNT

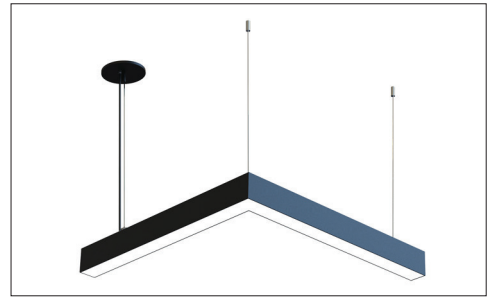

SUSPENDED



WALL MOUNT

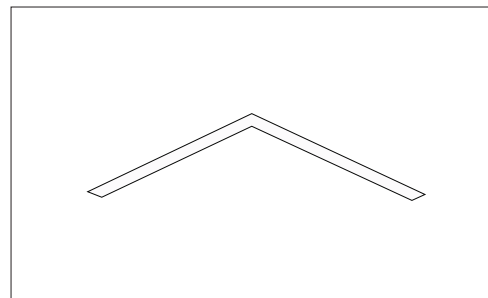

RECESSED TRIMLESS