

FEATURES:

- ✓ Architectural acoustic luminaire with direct lighting distribution.
- ✓ Made from recyclable plastic material available in different thicknesses.
- ✓ Class1 Fire rated with 0.7 Noise Reduction Coefficient/1" Acoustic.
- ✓ Light source: LED boards.
- ✓ Diffused illumination is provided by a high efficiency frosted opal lens.
- ✓ Extruded aluminum body comes with a built-in-driver and available in black or white finish.
- ✓ LED strips are rated for 60,000 hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL standards.

reinventlight

SPECIFICATION:

Sonic TRIAD+ - - - - - - - - - - - -

Enter the Product Code into the boxes above.

TYPE

- ☐ FV - Flush Vcut
☐ FR - Flush Regular
☐

Specify custom type.

HEIGHT

- ☐ 12 in
☐ 16 in
☐ 24 in

SIZE

- ☐ 2 ft
☐ 3 ft
☐ 4 ft

SOURCE

- ☐ 5 W/ft
☐ 7 W/ft
☐ 10 W/ft

RADIANCE

- ☐ DD - Direct

VOLTAGE

- ☐ UNV - 120/277V
☐ 347V¹
 1. Verify availability.

DRIVER

- ☐ ST - On/Off
☐ DL - 0-10V Dim (1%)
☐ DLO - 0-10V Dim (to Off)
☐ DL2 - 0-10V Dim (TW)
☐ CV - Constant Voltage (RGBW)
☐

Specify dimming protocol.

MOUNTING

- ☐ S6W - 6 ft Cord BK¹
☐ S6B - 6 ft Cord WH¹
☐ S ft²
 1. Canopy match the Cord color.
 2. Specify Suspension length/color.

LENS

- ☐ OP - Opal

ED TRIAD+ FINISH

- ☐ BK - Black¹
☐ WH - White²
 1. RAL 9005
 2. RAL 9016

CCT

- ☐ 30K - 3000 Kelvin/90CRI
☐ 35K - 3500 Kelvin/90CRI
☐ 40K - 4000 Kelvin/90CRI
☐ RGBW¹
☐ TW - Tunable White (27K-65K)²
☐

1. Available with CV.
 2. Available with DL2.
 Specify required CCT.

ACOUSTIC FINISH



LUMEN OUTPUT W/ft:


Watts	30K	35K	40K
5 W	515 lm	525 lm	535 lm
7 W	720 lm	735 lm	750 lm
10 W	1030 lm	1050 lm	1080 lm



Project:

Type:

SIZE:

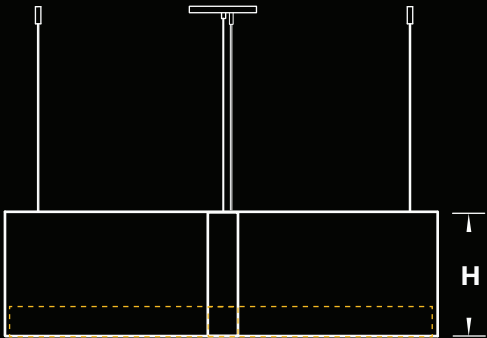


FR-FLUSH REGULAR




H - Height	Size	L x W
12 in = 11.75 in	2 ft	35.90 in x 41.52 in
16 in = 15.75 in	3 ft	52.61 in x 60.72 in
24 in = 23.75 in	4 ft	69.14 in x 79.83 in

L - Total Length
W - Total Width


FLUSH VCUT-FINISHES:

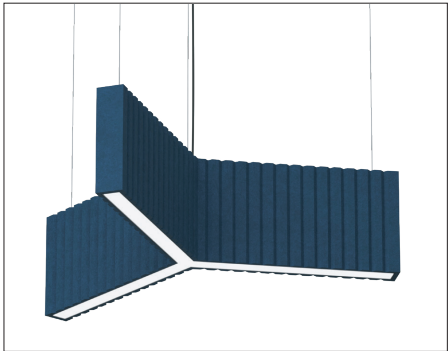

01

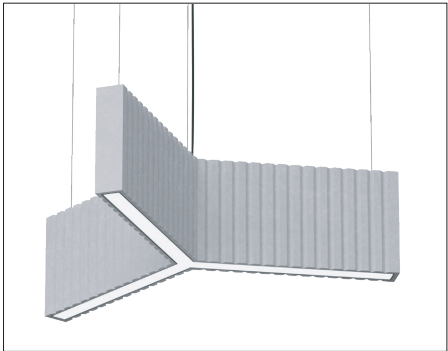


03

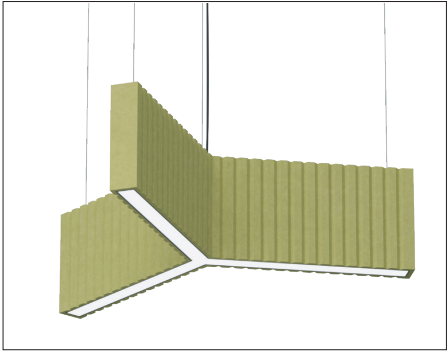


12


FLUSH REGULAR-FINISHES:

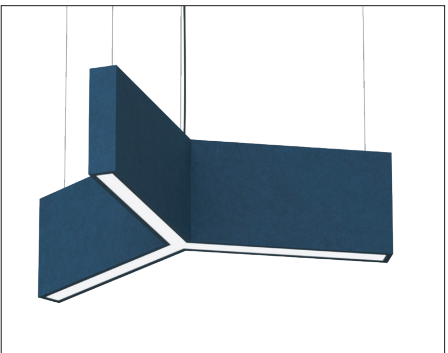

01

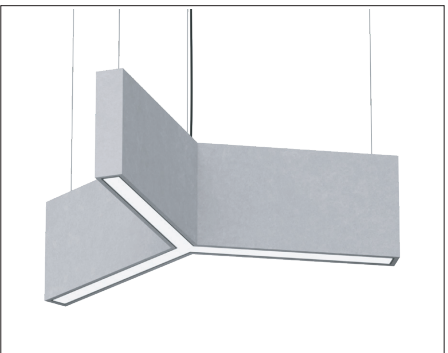

03

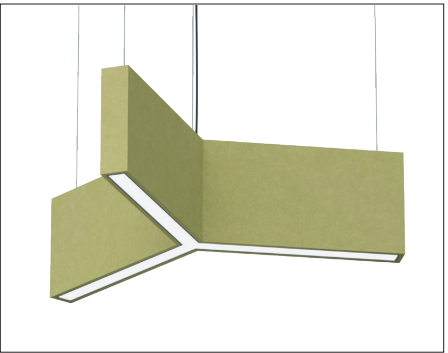

12